

DRG. NO. :- CTM-0126

PROVISIONAL

KNURLING ON
OUTER SURFACE DIA

HOLE FOR PRESS
FIT WITH ITEM 3
 $\phi 7.5$

1X 45°

12

± 0.05
6.6


-0.05
2

$+0.1$
1

ITEM-1

$+0.05$

9.25

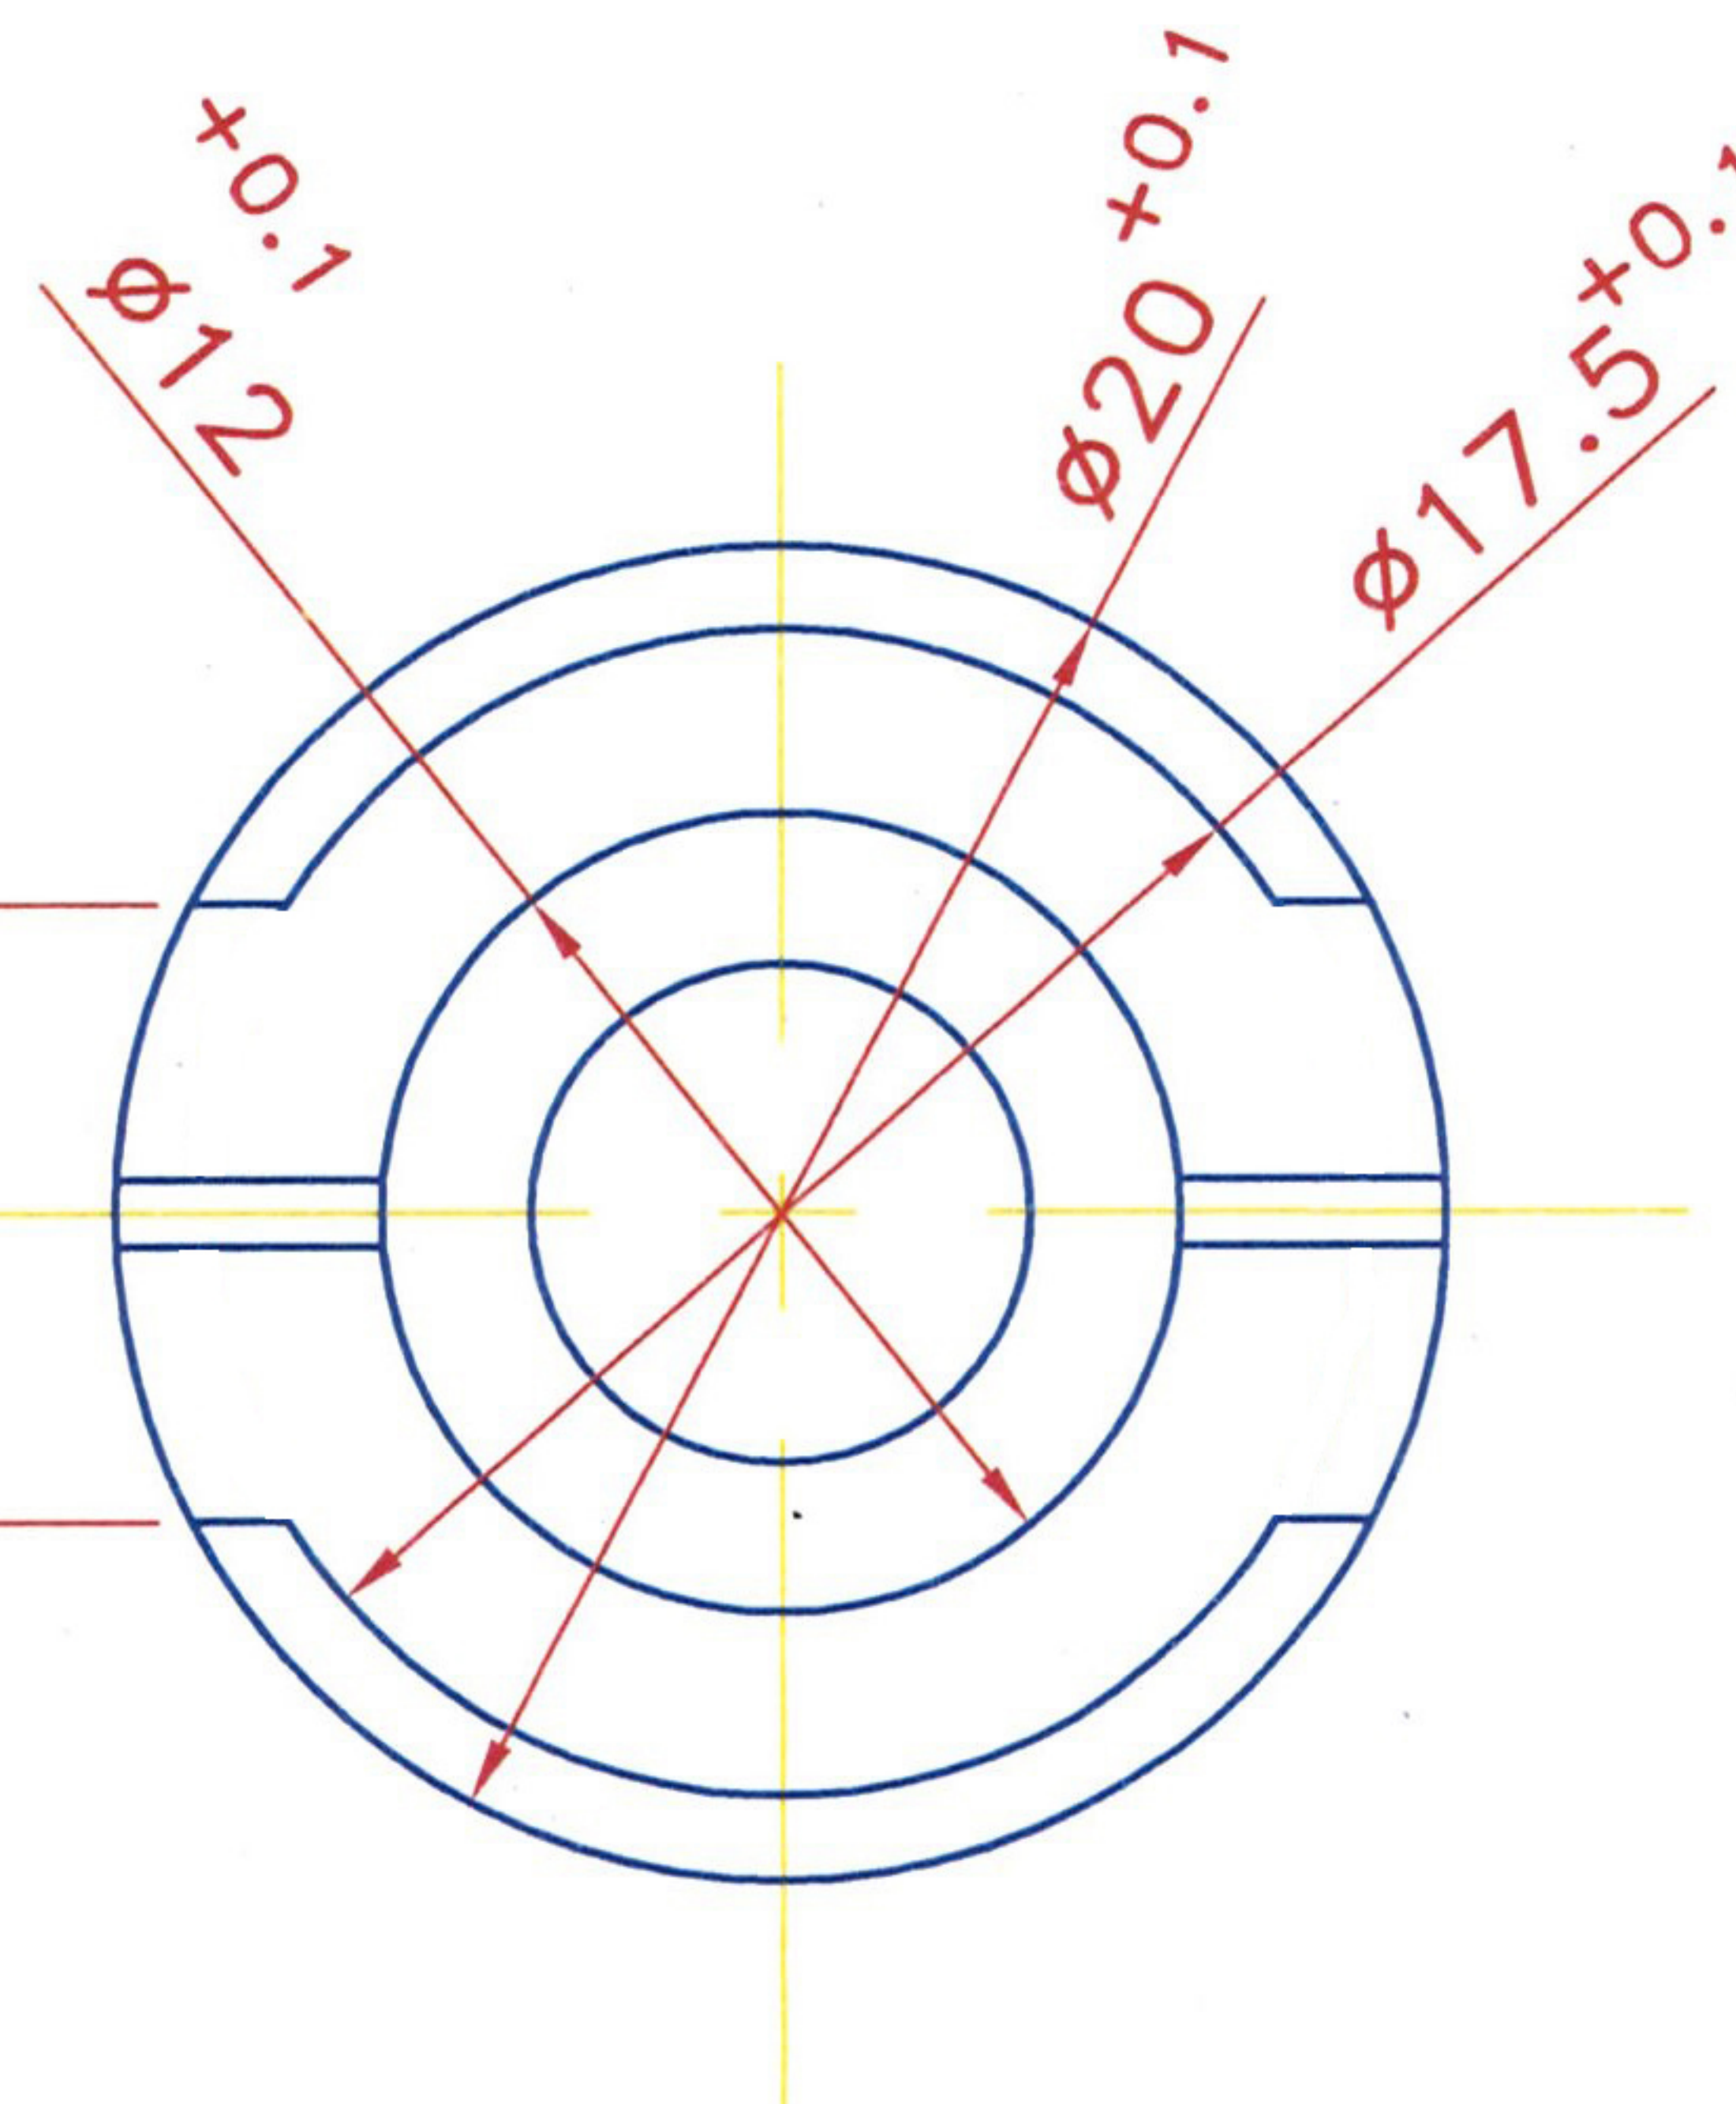

PIN WILL BE PRESS
FIT WITH ITEM 2

$\phi 7.5$

R2

20 ± 0.1

ITEM-2

NOTE:- DIMENSIONS TO BE READ AFTER PLATING
(IF PLATING IS DONE)
PROTECTIVE FINISH:-
POLISHED PHOSPHATING TO SPECN WPN/GEN/3 CLASS-II
OR BLACK OXIDE
TREATMENT:-
HARDENED TO VPN OF 400 MIN

APPROVED BY:-

DT. & SG.

DESCRIPTION

AMENDMENTS

2	1	BS 970/ EN 9 1955	PIN	
1	1	BS 970/ EN 9 1955	OPENER	
ITEM NO.	NO. OF	MATERIAL	DESCRIPTION	REMARKS
LIST OF PARTS				
SCHEDULE NO. :-	PROJECTION	COMPT.:-CAP SPRING RETURN	STORE DRG NO.	
SCALE :- 1:1	THIRD ANGLE	I.O.F PISTOL 7.65 MM (0.32")	M-8207	
DRAWN BY :	S.B. 15/7/07	CAP SPRING RETURN		
TRACED BY :		OPENER		
CHECKED BY :		FOR 0.32" MODIFIED PISTOL		
APPROVED BY :	S.B. 15/7/07	DRG. NO. :- CTM-0126		
CONCURRED BY :	S.B. 15/7/07	M/C :	NO. OF SHTS.:- 1	
SIGN.	DATE 15-7-07	G. X S. FY. COSSIPORE.	SHT. NO. :-	