D.S.CAT. NO. 3040-003115

DRAWING CONVENSIONS CONFORM TO JSG-0104
DIMNS. ARE IN m.m. | GEN. TOL 'MEDIUM' IS: 2102

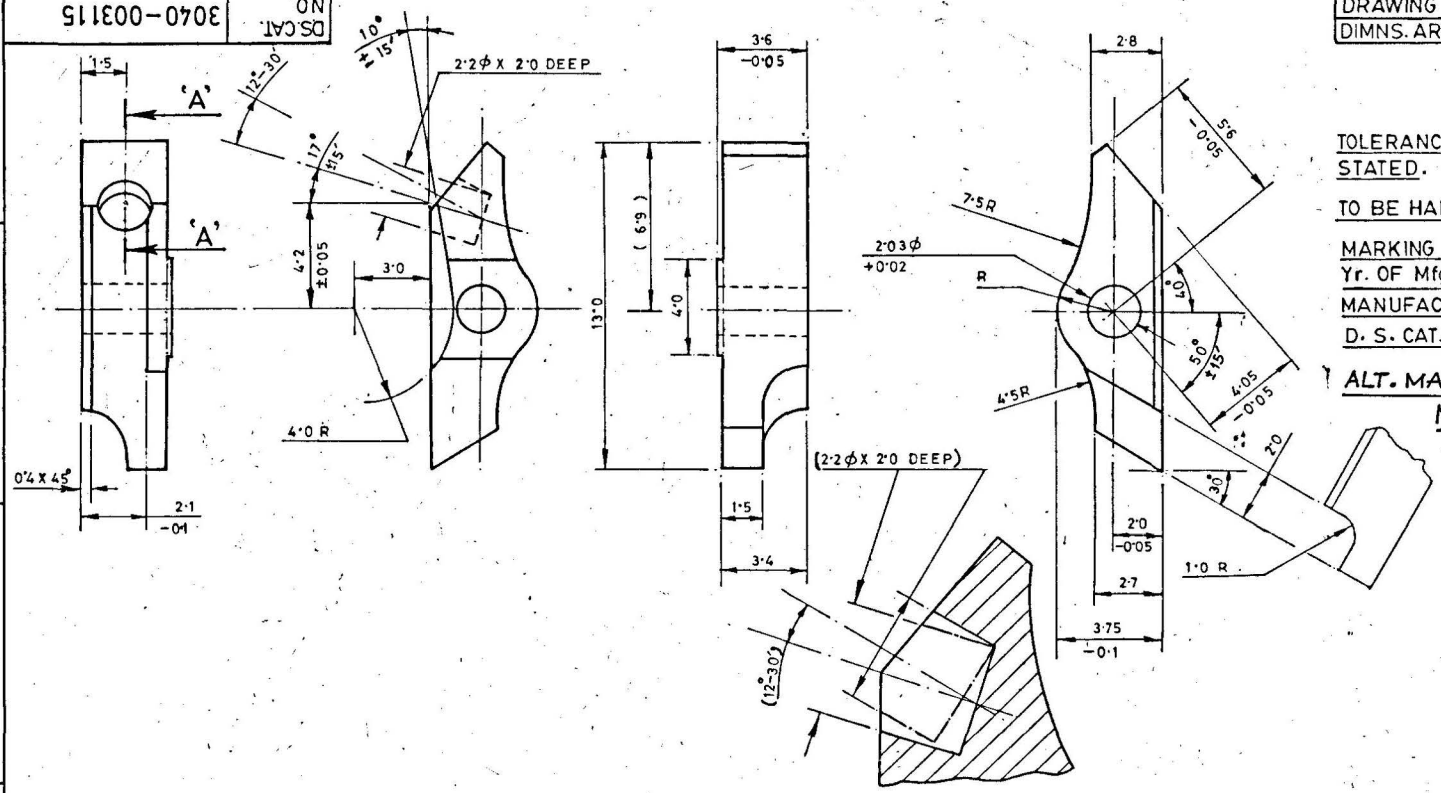

ENLARGED PART SECTION AT 'A-A'

TOLERANCES FOR ANGLES ± 30' UNLESS OTHERWISE STATED.

TO BE HARDENED & TEMPERED TO 400 TO 450 H.V.

MARKING ON TAG.
Yr. OF Mfg.
MANUFACTURER'S CODE
D. S. CAT. NO.

ALT. MATERIAL:-
MIM 4630 (MODIFIED)

NSN: B1/3040-72-0000115

DATE	AUTHY	BRIEF RECORD	ZONE	I/C;D.O.	G.O.
09.09.16	26938-SA	MATERIAL AMENDED		LT. COL.	
06-7-10	26518-SA	NSN ADDED		JTO	
13-05-10	26505 -SA	ALT. MATERIAL ADDED.		JTO	
9-10-2000	24834-SA	MATERIAL AMENDED		CD	DAC
29-12-97	24004-SA	PROFORMA CHANGED, NOTE DELETED, MARKING NOTE ADDED, NEG. RE-TRACED AND DRG. PROV. RE-SEALED.			DAC
		PREVIOUS D.C.NOS. 23754-SA, 23927-SA.			COPY
SEALED :-		PROV. D.C.NO. 23754-SA, DT. 20.3.97		SIGN.	

NOMENCLATURE: PAWL HAMMER

DRN.	CHD.	TRD.	COMP. N Sanbui
SCALE:- 5:1		EST. MASS	
DT. 29-12-97 I/C;D.O.		APPROVED DT. 20.8.81 NEGATIVE RE-TRACED	

MATERIAL :- STEEL IS:4454 Pt-2:2001, Grade VDC.

HT./HARDNESS:- AS STATED

PROTECTIVE FINISH :- PHOSPHATED TO SPECN. JSS-0465-01-1988 CLASS II (ACCELERATED), OIL FINISH

AHSP	CQA(SA), ICHAPUR
ASSY.	1005-007867
DGNR'S REF.	ARDE SK.2689/170
PART NO.	
DRG. NO.	
D.S.CAT. NO.	3040-003115

Create PDF files without this message by purchasing novaPDF printer (http://www.novapdf.com)

C426 SCAN