


2,5/8,0

(a)

A17220070

ALL 6425 059

70-4-005

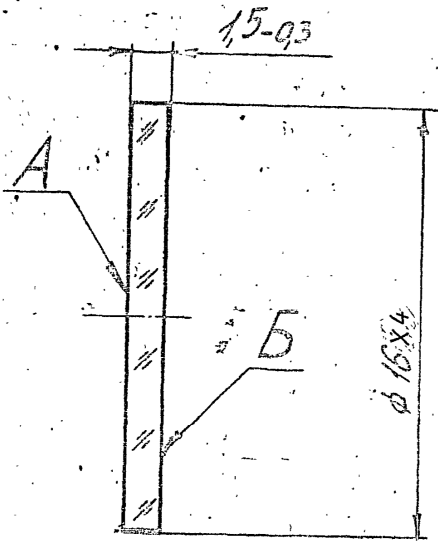

(a)

1. Treatment should be performed as per OCT-3-5692-84.
2. Allowed are:
 - a) Not more than three non-frosted chipping of upto 0.3 mm on each rib. Measure chippings from chamfers.
 - b) Not more than six separate dark spots, 0.4 to 0.6mm in diameter tints type 'Smear', having total area not exceeding 10 mm² on surfaces A and B.
3. Rib chamfers $0,2^{+0.3} \times 45^\circ$ should be provided.

D.C.(U):-1291-I(P), 1865-I(P) 6102-I, 6923-I 6927-I

Amend

17336-8	16072-12	16072-12
---------	----------	----------

D.C. 6927-I, NEW DRG. SEALED IN SUPERSESS/ON DEPOSITING DRG.	10.04.08
D.C. 6923-I, NDM AMENDED CAT. PT. No. ADDED	27.3.08
D.C.:- 6102-I, DRG. SEALED	6.4.96
(D.C. 1865-I(P). YEAR OF MATL. NOTE 1 & DIMENSION AMENDED.	2 15.4.94.
D.C.(U):-1291-I(P). DRG. PROV. SEALED	17.2.89
AMENDMENTS	SIG DATE
SHEET/DOC NO	SIGN DATE
DRAWN CH.V.RAO	10.04.08
EDT/CHK AN.0054	10.04.08
F/M,DC S.R.NAIR	10.8.89
DIV/OFFR T.K.BAREQUE	14.8.89
NAME	SIGN DATE

40021 / I 4457-54
 CAT/PT.No. V5/6650-005928
 A17220070

FILTER LIGHT ABSORBING OPTICAL ELEMENT GLASS DB-1-W OCT3-1899-84	SHEET WEIGHT SCALE 0001 5.1 TOTAL SHEETS ORDNANCE FACTORY PROJECT HYDERABAD
--	--

UPDATED UPTO 20.10.88 DO/OLE