
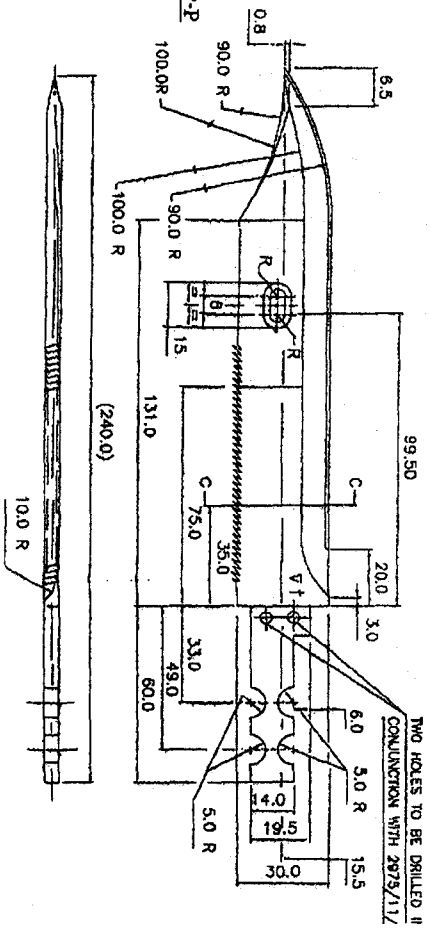
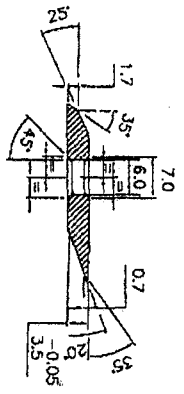



DRAWING CONVENTIONS CONFORM TO JSG : 0104
 DIMS. ARE IN mm. GEN. TOL. 'MEDIUM' IS: 2102

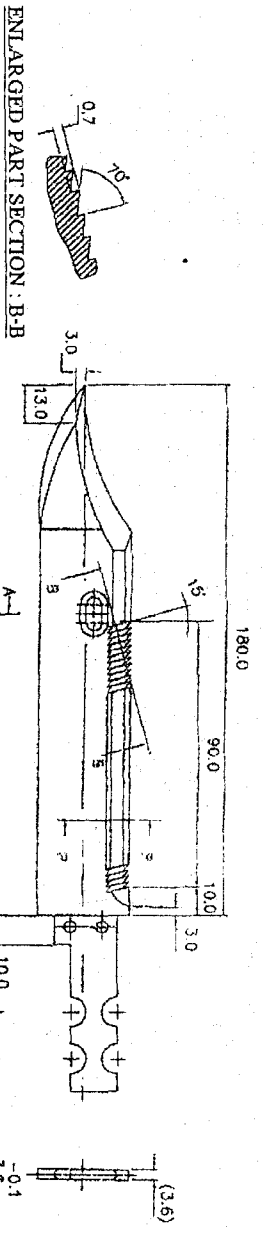

H/T HARDNESS :- HARDENED AND TEMPERED LEFT OF LINE C-C TO 475 525 HV.
 AND RIGHT OF LINE CC TO 280 TO 300 HV.
 TOLERANCE FOR ANGLES +30'

PROTECTIVE FINISH :- PHOSPHATED TO SPECN. JSS-0465-01 1988 CLASS II
 (ACCELARATED), OIL FINISH

MATERIAL :- STEEL BS.970 P.5.1972
 GRADE 735 A50 (EN 47)

ALL DIMENSIONS ARE IN MILLI METERS
 UNLESS OTHERWISE MARKED THIS TO BE MARKED ON
 INFORMATION MARKED THIS TO BE MARKED ON

TITLE OF	OPERATION	DATE	DATE
INDIAN ORDNANCE FACTORIES RIFLE FACTORY ISHAPORE	DRN.	15/10	15/10
	APPD.	15/10	15/10
SCALE :-		QXD	15/10
N.T.S		APPD.	15/10

ASSY DRG NO. :- BLADE AND CROSS PIECE ASSY. BAYONET (RFT SK NO. 10255)

7.62x39mm ASSAULT RIFLE (GHAATJAK)

BLADE

DRG. NO.

RFI SK NO. 10256

SHEET-1 OF-1