



MCT-3257/2

2 MAX

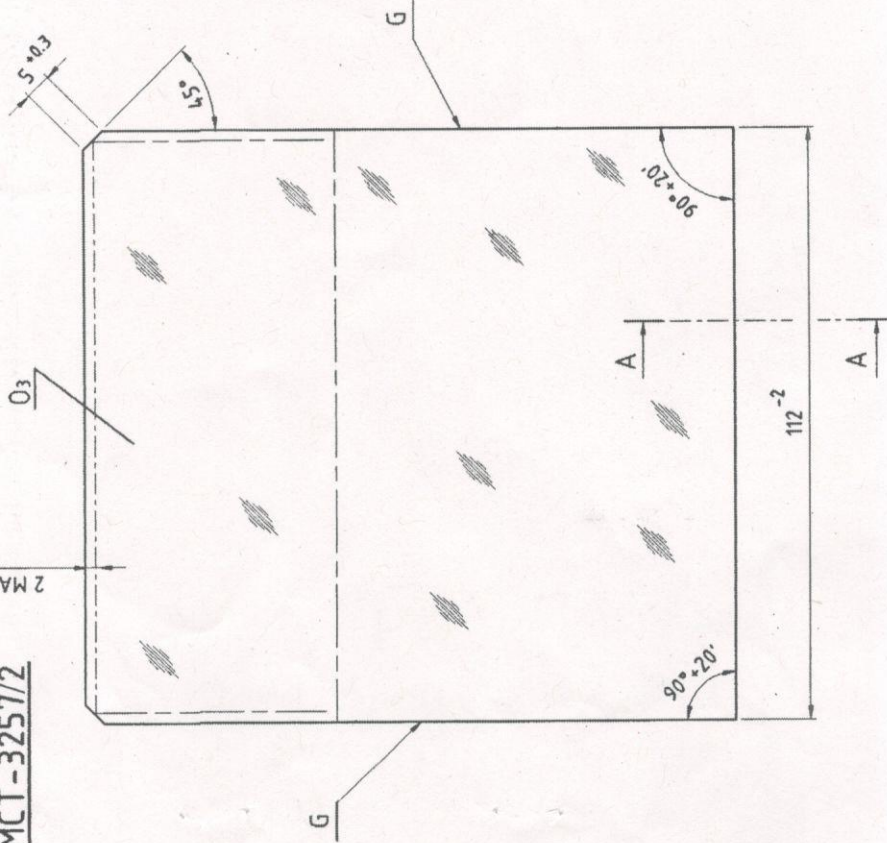

SEC A-A
SCALE-10:1



DON'T MAKE THE CHAMFER

NOTE :-

1. ALL SHARP CORNERS & EDGES TO BE CHAMFERED 1.0 mm AT 45° EXCEPT OTHERWISE STATED.
2. ALL SURFACES TO BE FLAT FACES MARKED 'G' SHOULD BE GRINDED.
3. FACES MARKED 'P' TO BE POLISHED & FLAT WITH IN 3 FRINGES UNLESS OTHERWISE STATED.
4. SURFACE QUALITY 60-40 (CENTRE ZONE), 80-50 (OUTER ZONE).
5. THROUGH ANGLE & OPTICAL PATH NOT MORE THAN ±5'
6. PYRAMIDAL ERROR NOT MORE THAN ±3'

ALL DIMENSIONS ARE IN mm.

FOR TRADE OIM
Date of Issue: 12-11-13

MATL:- GLASS K-108, GOST 3514-76

ALTERNATE EQUIVALENT MATL:-

OPTICAL GLASS, BSC-7 (517642) (RADIATION RESISTANT), GRADE-AA TO IS: 1400-1960, RE-AFFIRMED 1996, ABSORPTION LESS THAN 1%

ORDNANCE FACTORY DEHRADUN	DR:- R.K.SHARMA	DATE - 11.07.2012	SCALE - 1:1
	TR:-	MATL: AS ABOVE	TREAT -
APPROVED: JWM/807	CH:-	D.A. No. - 30/2016, Dt. - 05/11/2016	SHT. No.:- 1
		D.A. No. - 01/2013, Dt. - 16/01/2013	AMENDMENTS: OFD/00/002
PERISCOPE A.V. T.N.P.-165A (T-72) PRISM (WITHOUT SILVERING)		DRAWING No.:- MCT-3257/2	
DRG. No.:- AU 7.200.04.9			