


TRADE ACTION

- NOTES:
1. TOP & BOTTOM FLAPS ARE IDENTICAL
 2. THICKNESS OF SHEET 8mm & 7 PLY
 3. GAP BETWEEN FLAPS SHALL NOT BE EXCEED 0.5mm
 4. THE BOX MUST WITHSTAND THE LOAD OF MIN. 20.0 Kgs
 5. THE BOX MUST BE RIGID ENOUGH WHILE LOADING & UNLOADING
 6. SAMPLE TO BE SUPPLIED BEFORE BULK PRODUCTION
 7. BURSTING STRENGTH MINIMUM 14kg/Sq.cm
 8. OUTER LAYER OF CARTON BOX TO BE DUPLEX
 9. SAFETY LOGO TO BE LEGIBLY PRINTED OVER THE CARTON BOX AS SHOWN IN FIGURE ON OPPOSITE SIDES

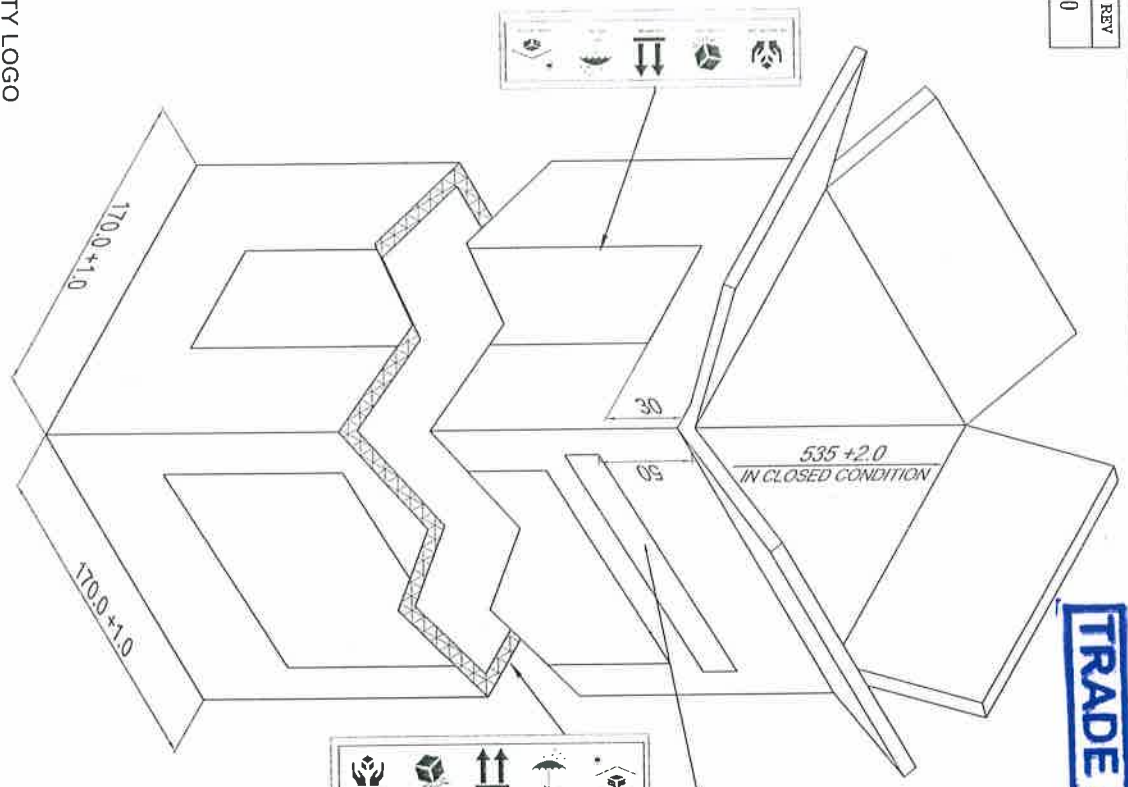

100

90	90	90	90	450
HANDLE WITH CARE	DO NOT DROP	THIS SIDE UP	KEEP DRY	STORE IN DRY

SAFETY LOGO

DESIGNED BY
STANDARD CELL
DATE: 14/5/2019
[Signature]

ಇದಕ್ಕೆ
ಬರೆ. ಸ.ರ. / ಸ.ರ.
ಶಿ. ರಾ. ಕೆ.
TO
THE SR.GM /GM
O.F.K

ಇದಕ್ಕೆ
ಬರೆ. ಸ.ರ. / ಸ.ರ.
ವರ. ರ. ಕೆ. / ಶಿ. ರಿ. ಕೆ. -25
FROM
SR.GM /GM
HEPF, TRICHY-25

TO BE PRINTED ON THE FACE OF THE BOX BY 5mm
HEIGHT & BOLD IN RED COLOR AS UNDER
125mm FSAPDS PRACTICE SHOT LOT No.-

MATERIAL	---	HEAT TREAT/GROUND	---	SURFACE TREAT	---	SUR. FINISH/COAT	---	EST. MASS	PRO/FINAL
ALTERATIONS									
TITLE : CARTON BOX FOR 125mm FSAPDS PRACTICE SHOT									
HIGH ENERGY PROJECTILE FACTORY TIRUCHIRAPALLI									
DRAWN	CHECKD.	USER SEC	CHECKD.	HOS STD	APPRD.	DATE	SCALE	SECTION	DRG. NO.
						13.10.21	NIS	STD	H OMA 125 1 189 0
LATEST REFERENCE :-									REV
ALL DIMENSIONS ARE IN mm REMOVE ALL SHARP EDGES									1 OF 1
SHEET									REV