




**REFERENCE**

9 SLOTS EQUISPACED ON  
 PCD 98.0 AS SHOWN

STRIP TO BE BENT WITH  
 IGNITER AS SHOWN

STRIP TO BE SPOT WELDED  
 TO BODY AS SHOWN

STRIP MUST BE SOFT ENOUGH  
 TO BE TURNED BY HAND  
 AFTER SPOT WELDING.

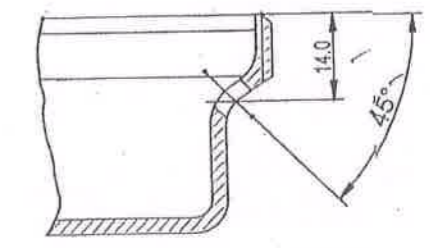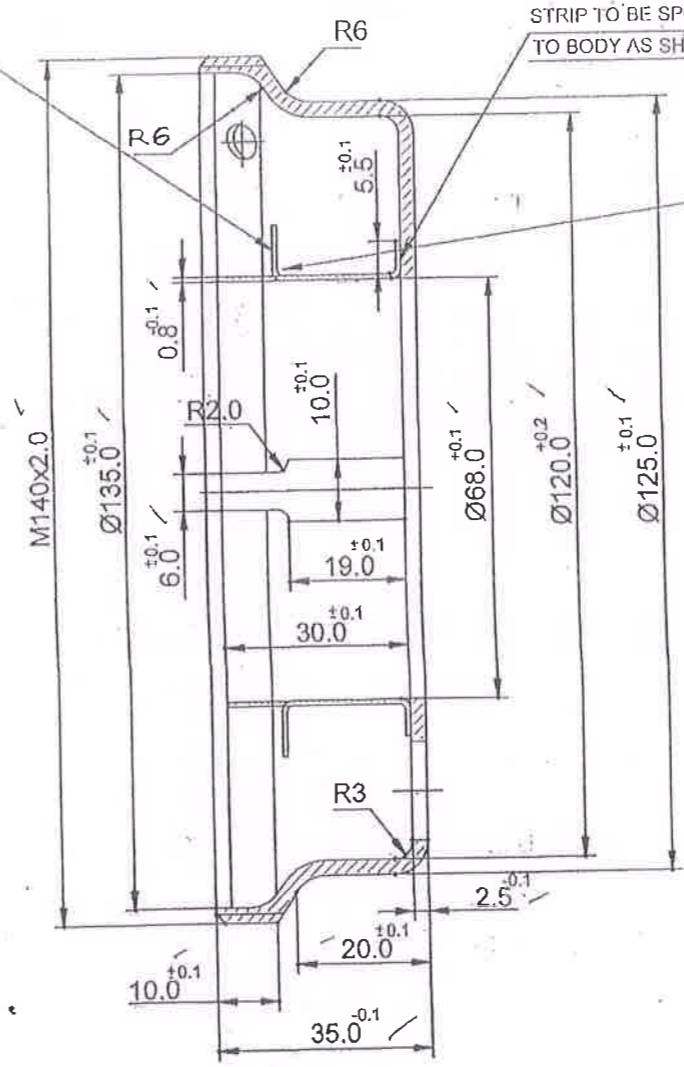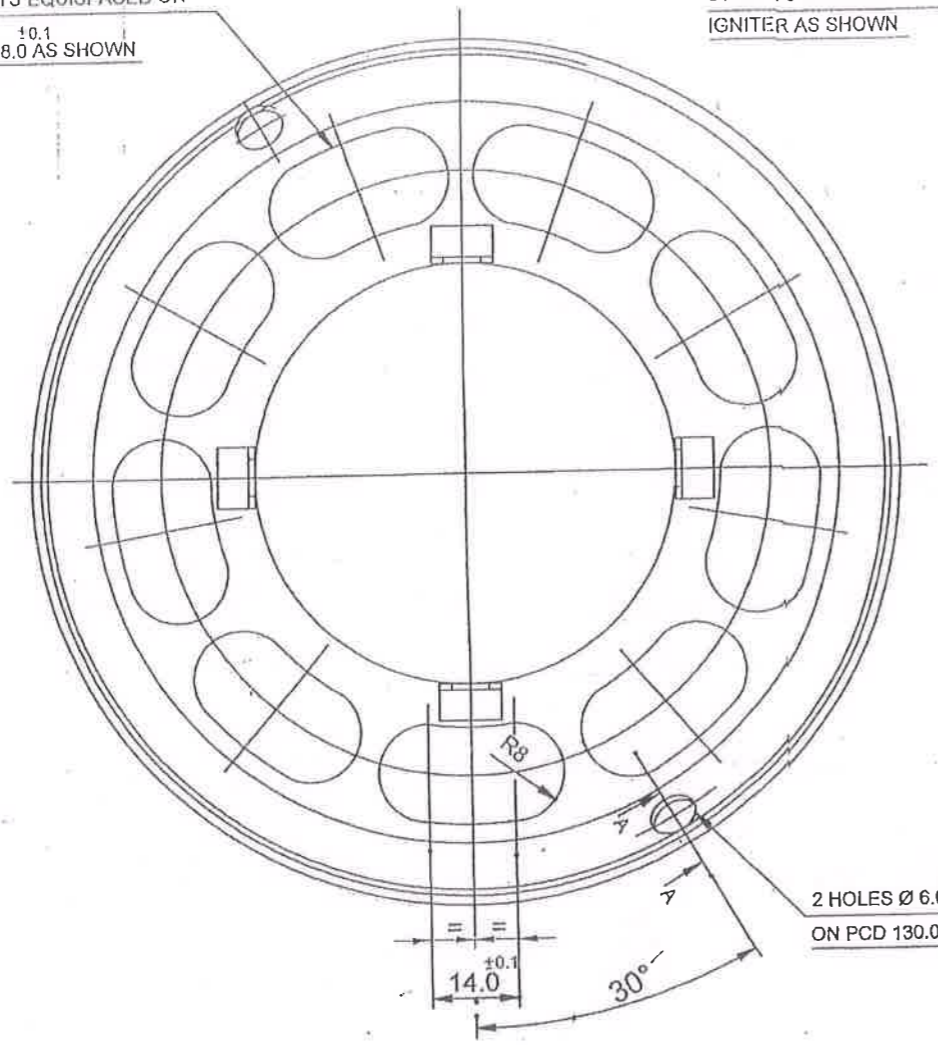

SECTION 'A-A'


ISSUED BY  
 STANDARD CELL  
 for EOI  
 DATE: 9/9/10 SIGNATURE:

PROTECTIVE FINISH :-  
 SURFACES BE COATED WITH ZIRCONIUM  
 SILICATE TO APPENDIX 'C' OF SPECN  
 ARDE/SPECN/334/1985 EXCEPT  
 THREADED SURFACE OR  
 APC 216 TO SPEC: JSS: 8010-51: 09  
 TO BE PHOSPHATED TO IS: 3618 CLASS-B

TRIM ON THIS LINE WHEN SUPPLIED TO TRADE

R.No			DATE		ZONE		BRIEF RECORD		AUTHORITY		INITIALS		SCALE:- N.T.S.		DIMENSIONS ARE IN mm		TOL		D.S.CAT No		ASSY.DRG. No.			
22-09-15							NOTE ADDED UNDER PROTECTIVE FINISH		ARD 2484				DGN.		DRN		TCD		COMP. ✓		CHD.		ASSY.DRG.LIST No.	
01-5-14							ALTERNATE PROTECTIVE COMPOSITION		ARD 2459				PASSED		APPROVED				TRENDS TO CONFIRM IS:4218				DTE GEN OF NAVAL	
02-06-09							APPROVED		DGNAI				MATERIAL SPEC:- IS:513 Gde 'O/EDD' NORMALISED						GEN.SPEC: IS:2102				ARMAMENT INSPECTION	
							SPECIFICATION ADDED						MATERIAL SPEC:- IS:513 Gde 'O/EDD' NORMALISED						STORE SPEC. NO.				IHQ, MoD (NAVY), N.DELHI	
							BRIEF RECORD		DGNAI				PROTECTIVE FINISH: SEE DRG						STORE REF. No.					
																			GAUGE SCHEDULE No.					

**HOLDER**

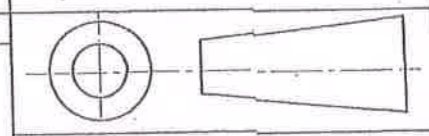

DRG.No.  
**NASK 1070**  
 (PROVISIONAL)