PART NO.	DRAWING CONVENTIONS CONFORM TO IS: SPECIFICATIONS DIMS. ARE IN mm.
IQX 1001	

D.C.35701-A

GEN.TOL.MEDIUM CLASS TO IS: 2102

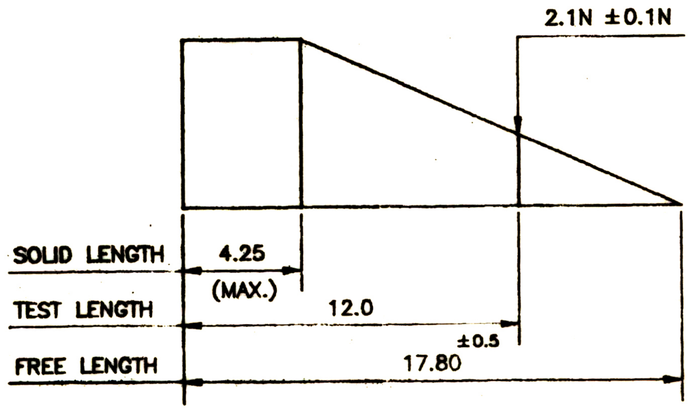

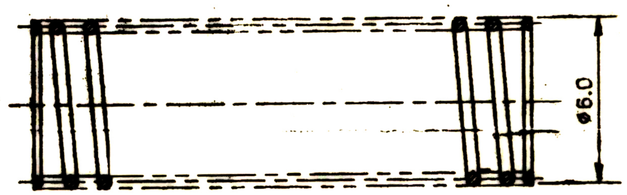

WIRE DIA:- 0.45 ALTERNATIVELY 0.43 (26 SWG)

NO.OF EFF COILS = 7

TECHNICAL REQUIREMENT:-

SPEC.NO.CQA(A) 0922

PROTECTIVE FINISH:-

CADMIUM PLATED TO SPEC.IS:1572:1986 (2nd REVISION) Gd Cd 12

NOTE:-

1) LAST COIL AT EACH END LAID FLAT.

2) DIMENSIONS APPLY AFTER PAINTING.

R. NO.	DATE	AUTHORITY	REVISION	ZONE	AHSP	D.O.
	28/8/96	DC.36187-A	REDRAWN WITHOUT CHANGE AND FRESH MASTER COPY REPLACED IN SUPERSESSION OF EXISTING DILAPIDATED COPY			
			PREV.DCs NOs.35701-A,35815-A,35892-A & 36103-A			SD/-

DRG. SEALED:- 29/4/94 (PROV)

DRN:- VAK	CHD:-	TRD:-	COMP:-
C.D.[illegible]	D I/C D.O.	SCALE:- 5:1	
APPD.	FOR CQA(A)	EST.MASS:- —	
		GAUGE SCHD:- I-3416	
		DATE:- 25-4-94	

MATL:- STEEL WIRE IS:4454 Pt1-1981 (2nd REV.) GRADE 3

PROTECTIVE [illegible] AS ABOVE

ASSY.DRG. IQX 79 GE

DESIGNER'S REF. ARDE 2236 DET.NO.3

PART NO. IQX 1001

D.S. CAT NO. NOT APPLICABLE

AHSP:- CQA(A)KIRKEE

SPRING
(STRIKER)