


TRIM ON THIS LINE WHEN SUPPLIED TO TRADE

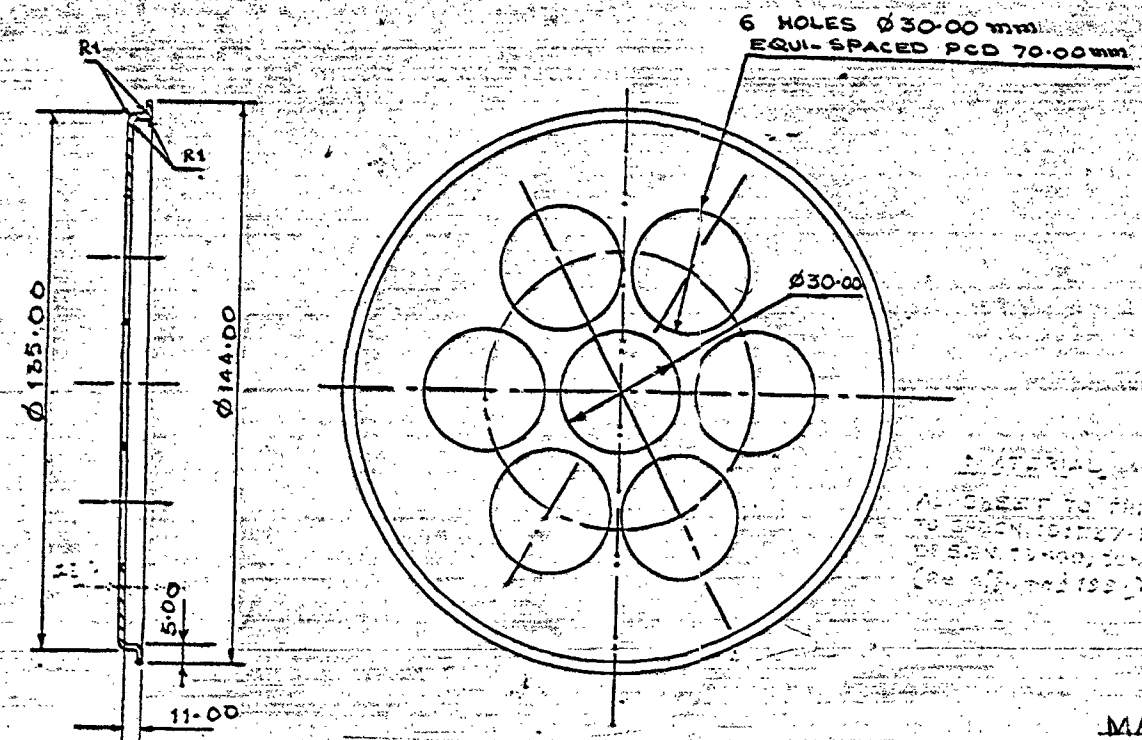


ALUMINIUM SHEET TO THICKNESS 0.45  
 TO SPECN IS: 737-1986 DESGN. 19500  
 CONDITION H2

**MATERIAL:-**  
 ALUMINIUM SHEET TO THICKNESS 0.45 ±0.045  
 TO SPECN IS: 737-1986 DESGN. 19500  
 CONDITION H2

**PROTECTIVE FINISH:-**  
 TO BE ANODIZED TO SPECN IS: 7086-1973  
 TYPE 2 (THICKNESS 10 μm TO 15 μm)

SCALE: 1:1	DIMENSIONS ARE IN mm	TOL:	QS CAT No.	ASSY DRG No. NASK 869
USN	DRN <i>808</i>	TCD	COMP <i>CHD</i>	ASSY DRG LIST No.
PASSED <i>(initials)</i>	APPROVED <i>(initials)</i>	GEN SPEC: NA	SPEC: A-31 B	DTE GEN OF NAVAL ARMAMENT INSPECTION NHQ NEW DELHI
MATL: - SEE DRG	MATL SPEC: - SEE DRG	STORE SPEC No.	STORE REF No.	
PROTECTIVE FINISH SEE DRG		GAUGE SCH No.		
R No.	DATE: 7-12-2001	ZONE	APPROVED	BRIEF RECORD
			AUTHORITY INITIALS	

**BOTTOM RING**

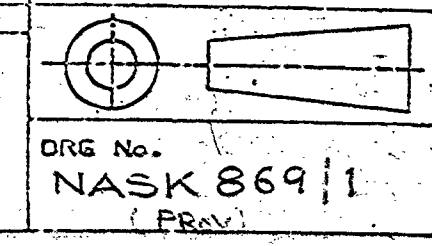

DRG No.  
**NASK 869 | 1**  
 (PRV)

USED ON SUSTAINER IGNITER

BASED ON DRG No. OF DR/SI/N/01 DT 15-4-99