



NOTE:-
ALL LAP JOINTS OF BOX TO BE SPOT WELDED
OR RIVETED ϕ 3 x 8 LONG AT 16 PITCH.
FLANGES OF HINGE, FRONT & REAR SEPARATORS TO
BE SPOT WELDED OR RIVETED AT 50 PITCH.

RUBBER MEDIUM HARD TO SPECN. IND/ME/84
(PROV.) COMPOUND NO. C-3.


OR
SPONGE RUBBER "VULCANISE TYPE 'B' TO SPECN.
IND/ME/645 - A.

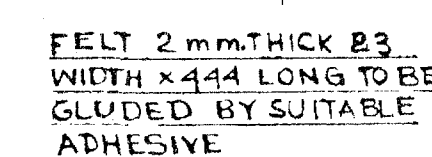

TO BE STENCILED HERE IN
WHITE PAINT BY 12 mm LETTERS

SCHEDULE OF PARTS		
Sl. No.	NOMENCLATURE	DRG. No.
1	BACKET LINK CATCH ASSY	CQA(SA)-182
2	BODY	CQA(SA)-146/1
3	SIDE PLATE	CQA(SA)-146/3
4	GUARD	CQA(SA)-146/20
5	CHANNEL FOR LID, FRONT & REAR	CQA(SA)-146/23
6	CHANNEL FOR LID, LEFT & RIGHT	CQA(SA)-146/24
7	MAGAZINE BACK REST PLATE	CQA(SA)-146/12
8	RIVET	CQA(SA)-102/6
9	RUBBER PAD, BOTTOM, BODY	CQA(SA)-102/22
10	HINGE	CQA(SA)-146/22
11	RUBBER PAD FOR COVER	CQA(SA)-146/19
12	HANDLE CARRYING	CQA(SA)-146/17
13	SEPARATOR, FRONT & REAR, UPPER	CQA(SA)-146/6
14	SEPARATOR, FRONT & REAR, LOWER	CQA(SA)-146/7
15	RUBBER PAD, STOP	CQA(SA)-146/8
16	COVER	CQA(SA)-146/4
17	UPPER DECK	CQA(SA)-146/9
18	PLATE REST (UPPER DECK)	CQA(SA)-146/10
19	CLAMP (HANDLE CARRYING)	CQA(SA)-146/18
20	RUBBER PAD	CQA(SA)-146/15

CERTIFIED COPY OF THE
STORE DRG/GAUGE DRG/S
SPECN/NOTE SHI.

DRN <i>BRN</i>	CHD <i>SLG</i>	TRD.	COMP.	AHSP-CQA(ISA) ICHAPUR
SCALE-1:2		EST MASS.		ASSY-
DT-18.10.02	<i>Ans</i> 1/C; I/O.	APPROVED- DT. 6.1.97		
		NEG. REDRAWN		DGN'S REF. CQA(SA)-102
MATERIAL ~ AS STATED.				PART NO.
H.T./HARDNESS.				DRG. NO.-CQA(SA)-146
PROTECTIVE FINISH.				DISCAT NO. 1005-560034

[illegible]