
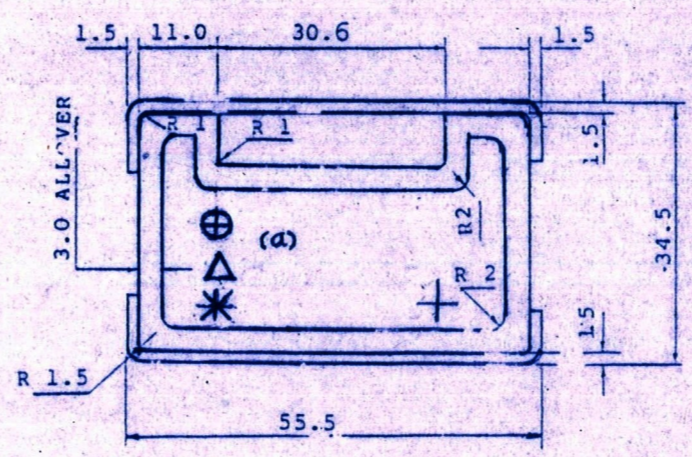
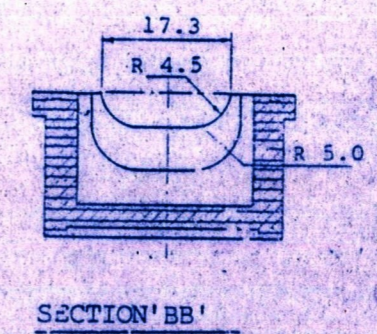
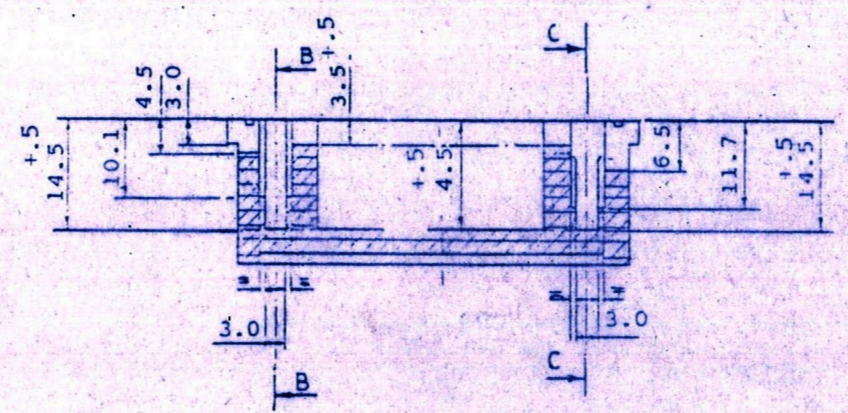
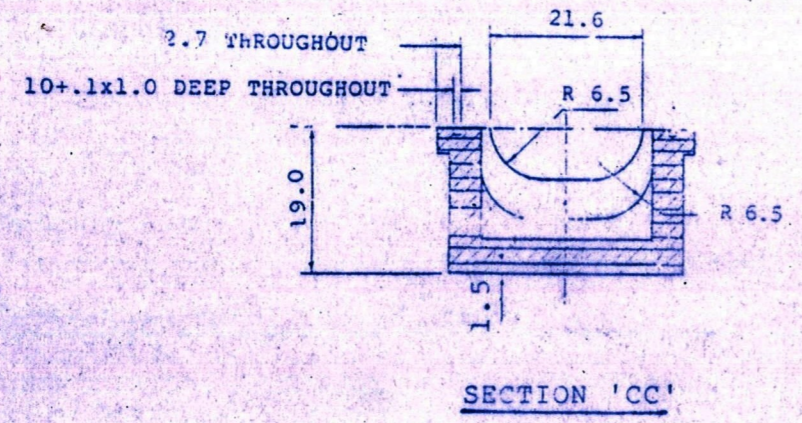



REDUCED DRG. PREPARED BY: CQA(I) DELRA DUN
 PREPARED BY: *Delra Dun*
 CHECKED BY: *Delra Dun*
 DATE:
 CHECKED FOR QM

TESTS:-
TEST FOR SOUNDNESS OF BODY
 FIVE SAMPLES PER BATCH OR LOT WILL BE TAKEN AT RANDOM FOR EACH OF THE UNDERMENTIONED TESTS.
 A) PLACE THE STORE IN A HEATING CHAMBER IN SUCH A MANNER THAT NO EXTERNAL MECHANICAL STRESSES ARE APPLIED TO IT. THE STORE SHALL BE MAINTAINED AT A TEMPERATURE OF 75°C FOR A PERIOD OF 24 HOURS.
PASSING STANDARD
 THE STORE SHOULD NOT EXHIBIT ANY HAIRLINE CRACKS OR DEFORMATION WHEN SUBJECTED TO TEMPERATURE CONDITIONING.
 B) PLACE THE STORE IN A COOLING CHAMBER IN SUCH A MANNER THAT NO EXTERNAL MECHANICAL STRESSES ARE APPLIED TO IT. THE STORE SHALL BE MAINTAINED AT - 0°C FOR PERIOD OF 24 HOURS.
PASSING STANDARD
 THE STORE SHOULD NOT EXHIBIT ANY HAIRLINE CRACKS OR DEFORMATION WHEN SUBJECTED TO TEMPERATURE CONDITIONING.

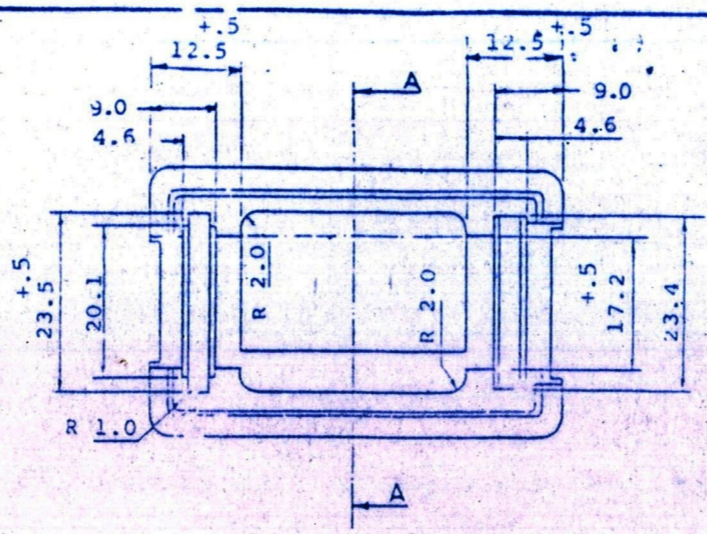

MATERIAL :-
 FIBERGLASS REINFORCED POLYSTYRENE TO SPEC. IND/ME/802 (PROVISIONAL) OLIVE GREEN COLOUR TO SPEC. IS:5-1978-ISC-220
MARKING TO BE MOULDED IN 3.0 TYPE
 * CONTRACTOR'S INITIALS OR RECOGNISED TRADE MARK.
 ⊕ CAT/PART No.
MARKING TO BE HOT STAMPED IN 3.0 TYPE
 + DATE OF MANUFACTURE (MONTH & YEAR)
 Δ LOT No.

TITLE:-
 BODY

AMENDMENTS	CHD	SIG	DATE
D.C:-5818-I:- DRG. REDUCED & SEALED IN SUPERSESSION OF IUX-585.			20.1.94
(a) D.C:-6479-I MARKING AMENDED.			5.5.2000
FOR EXPLANATION OF DIMENSIONING ETC, SEE CQA (I) GUIDE No 001-1997. THIRD ANGLE PROJECTION DIMENSIONS ARE IN mm	DRN	sd	APPROVED
	TCD	sd	OR
	CHD	sd	CONTROLLER
	CHD	sd	CQA (I) DDJH
			DATE - 19.1.94
MATL & SPEC:-	USED		
	ON		
	BASED ON		IUX-585
	C/T/PT No.		
FINISH & SPEC:-	DRG No.		CQA (I) 408/1
	SCALE		SH OF