

8




616910-E

D.C.I. 2B794-A

PROTECTIVE TREATMENT - IN INDIA THE COMPONENT TO BE ZINC PLATED TO SPECN. DTD 903 OR CADMIUM PLATED TO SPECN. DTD 804, FOLLOWED BY CHROMATE PASSIVATION TO DEF.130.

MATERIAL :- STEEL TO SPECIFICATION NO. BS:1449 SECTION 1.1:1991 GR. CS3 OR CS4 IN BRIGHT FINISH CONDITION OR IS:513-2008 GR. CR2 OR CR3 BRIGHT FINISH.

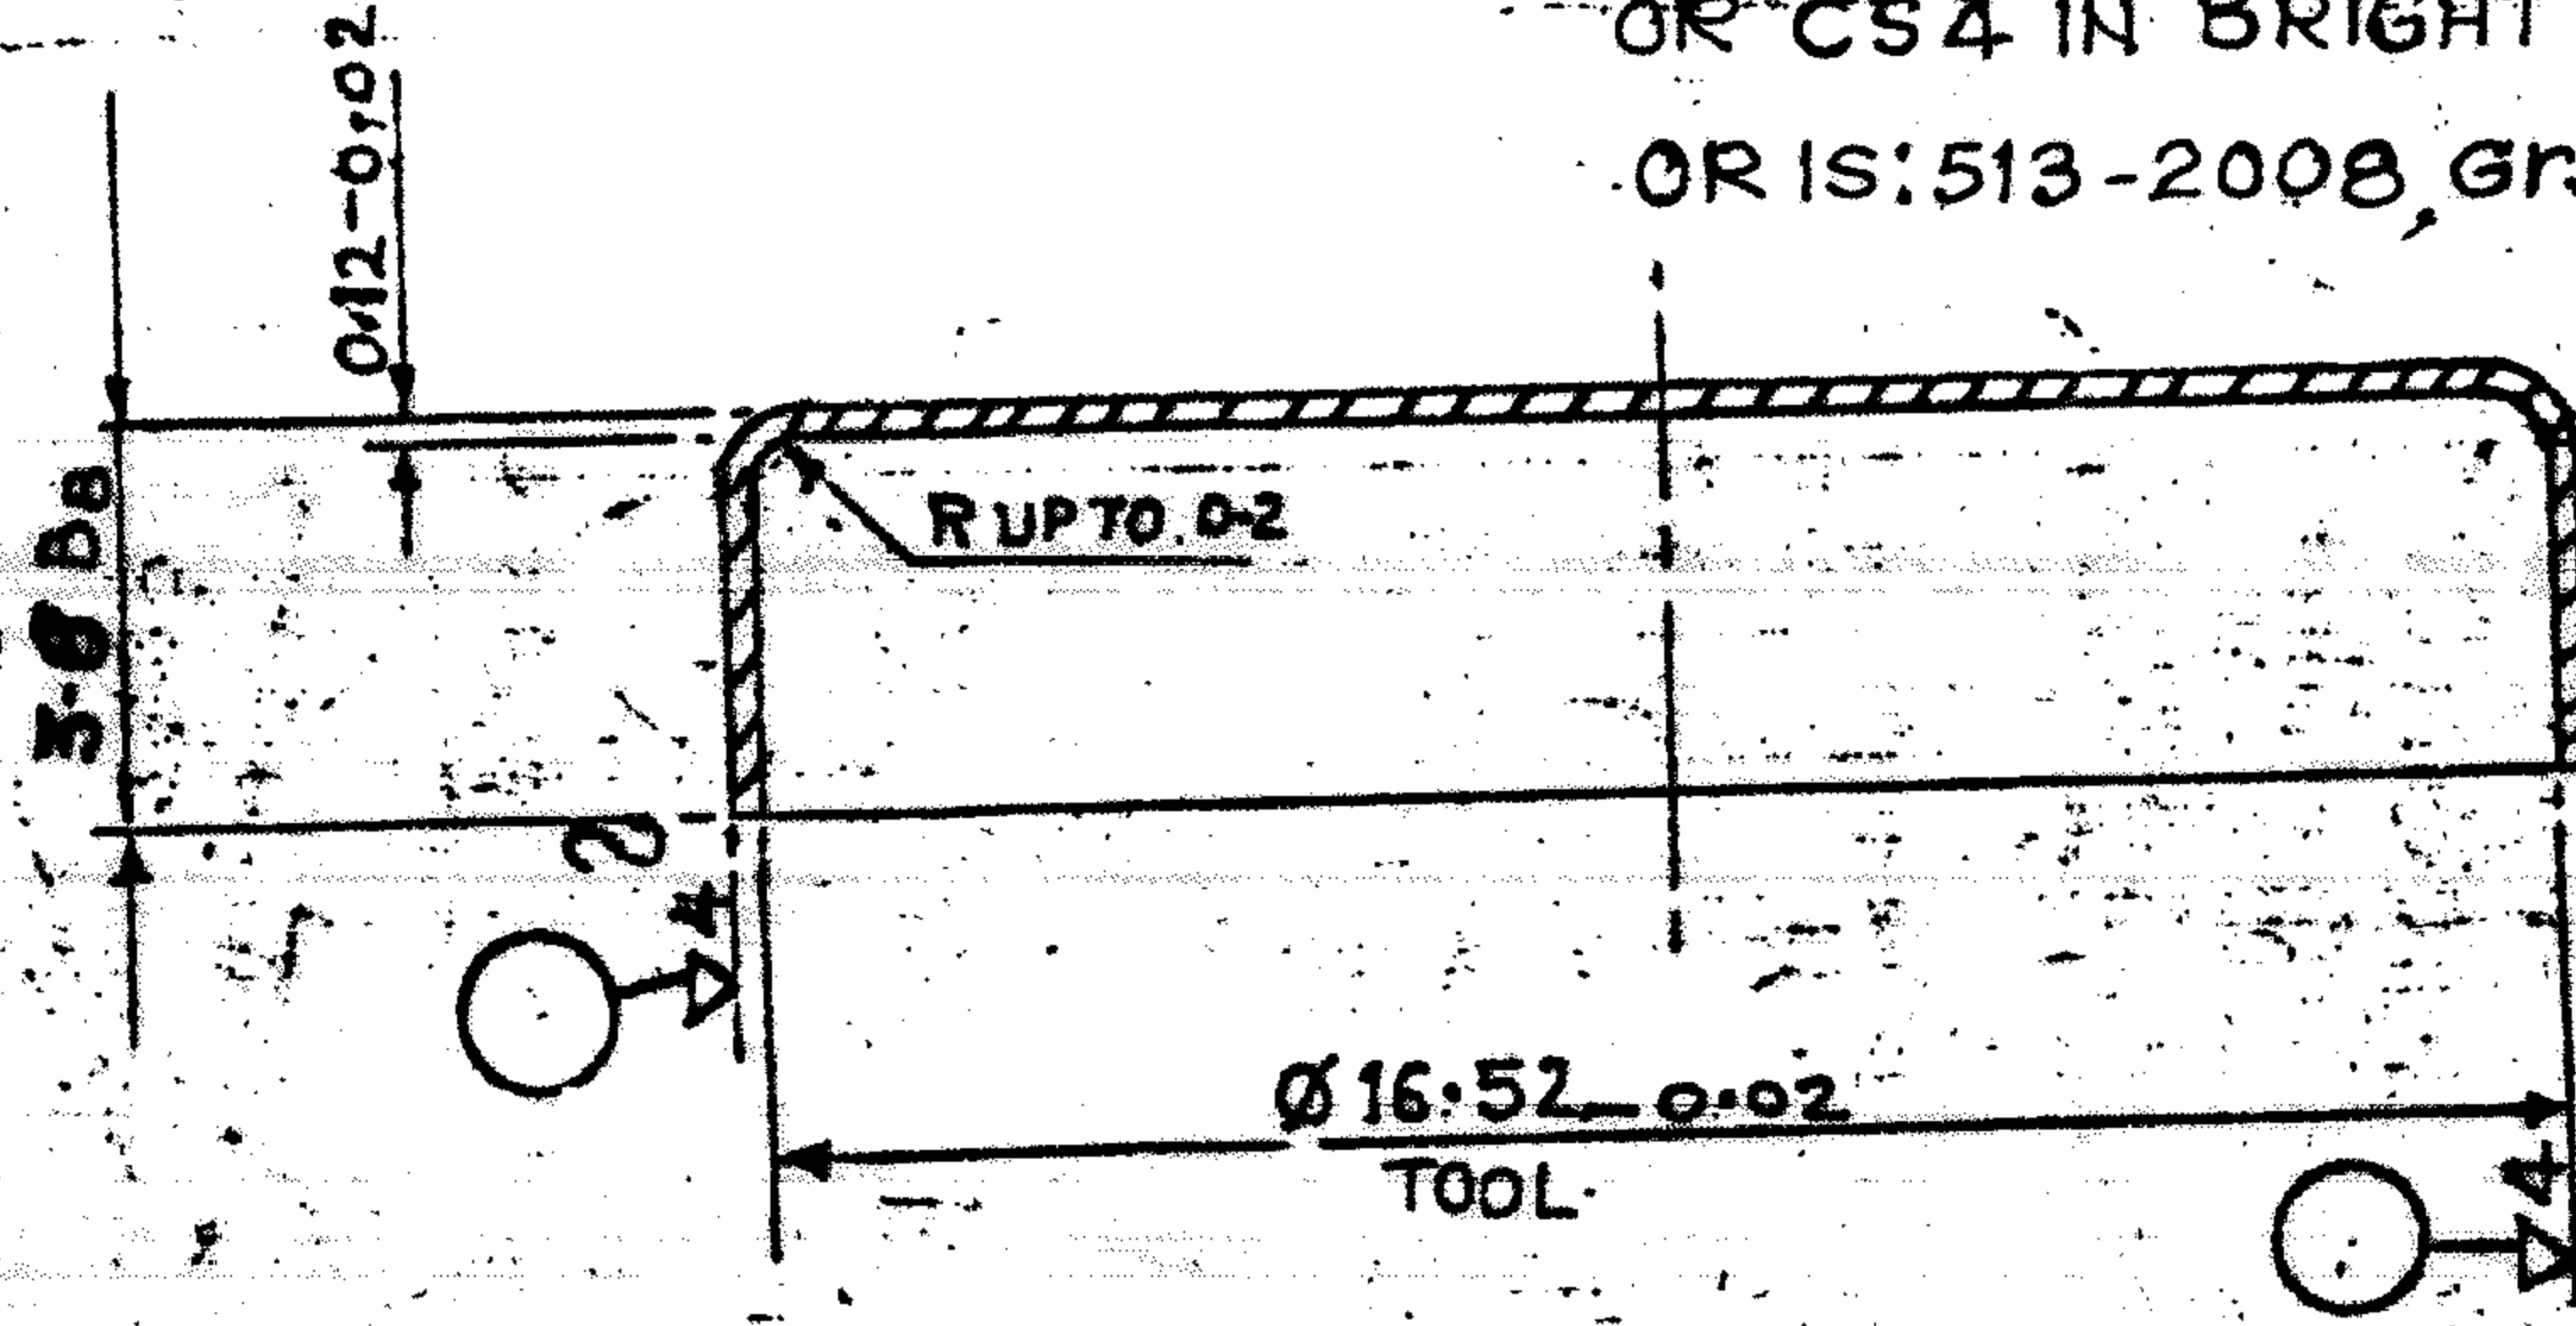

- 1. 243 XP MAY BE USED FOR COATING PURPOSES.
- 2. PERMISSIBLE MATERIAL SHEET .08 ETC. (SEE MATERIAL SHEET)
- 3. SURFACES NOT HAVING MACHINING SIGNS SHOULD HAVE FINISH CORRESPONDING TO THE TECHNICAL REQUIREMENTS FOR THE MATERIALS.

4. LACQUER WITH 3 TO 5 % SOLⁿ OF SHELLAC LAC TY-FAY 4391-54, ALTERNATIVELY IN INDIA, VARNISH SHELLAC 6% TO SPECN. JSS 1326.

6010-63

D.S. CAT No 1390-000243

3-016919

53-B-025Y

6-7-11 DC.37284-A MATERIAL AMENDED

11-2-88 D.C.I. 34325-A D.S. CAT No ADDED

10/83 D.C.I. 33496-A MATERIAL AMENDED

8-2-82 TRACED WITHOUT CHANGE

PREVIOUS D.C.I. Nos. 28794-A, 29221-A, 29306-A & 29486-A

DATE AUTHORITY REVISION

ANSP. D.O. SIGN.

STRIKER COVER

LOW CARBON STEEL STRIP, FOC T 503-41

LETTER DIMENSIONS SCALE

6 0.43