

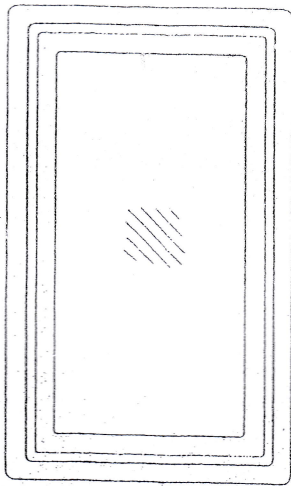



ASSEMBLY DRAWING OF GLASS WITH RUBBER BEADING

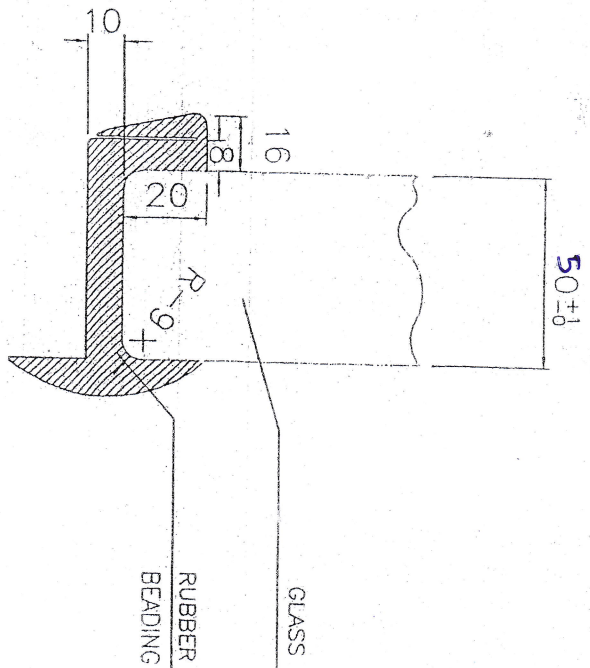

VIEW-A



ENLARGED VIEW--A

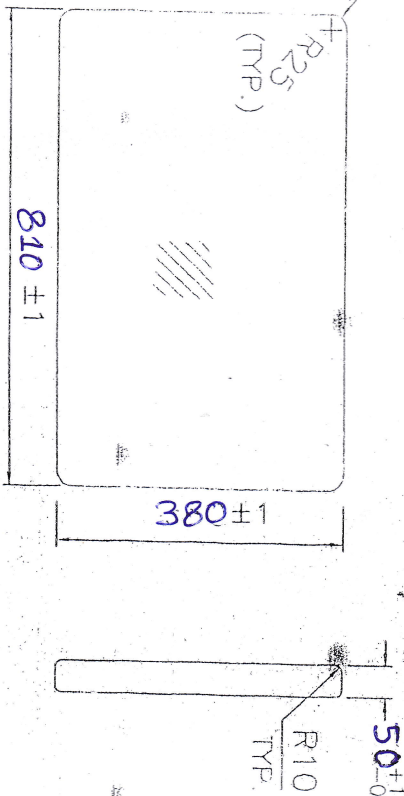

GLASS DRAWING

1. ALL DIMENSIONS ARE IN MM.
2. TOLERANCE ON UNSPECIFIED DIMENSIONS ARE ± 1 mm.
3. REFER SPECIFICATION NO: **VF31R4d/VA/SP/BPV/G**
4. GLASS SHOULD GIVE NIU LEVEL III PROTECTION AGAINST 7.62 SLR FROM 10 MTRS. DISTANCE.
5. GLASS SHOULD BE SPLINTER PROOF TYPE.
6. GLASS TO BE SUPPLIED WITH MOULDED RUBBER BEADING FITTED WITH THE GLASS.

ITEM		DESCRIPTION	NO. OFF	MAT.	STD.	QUANTITY, HSE. = 04 NO.
						SIZE / WT. REMARKS
INDEX	ALTERNATION	DATE	SIGN.			
DIM.	TOL.					
0.30	±0.1					
30-250	±0.2					
250-800	±0.3					
800-2000	±0.5					
≥2000	±0.8					
GEN. TOL.						
V. D. O.		VEHICLE FACTORY JABALPUR				
BULLET PROOF GLASS SIDES WITH RUBBER BEADING FOR SMC (4x4)						
DRG. NO. 1A/13P/5m						
MACHINE						
1						
1/14						
SHTS.						