


DRAWING NUMBER

321-20

F

 $\approx 2 \times 45^\circ$

E

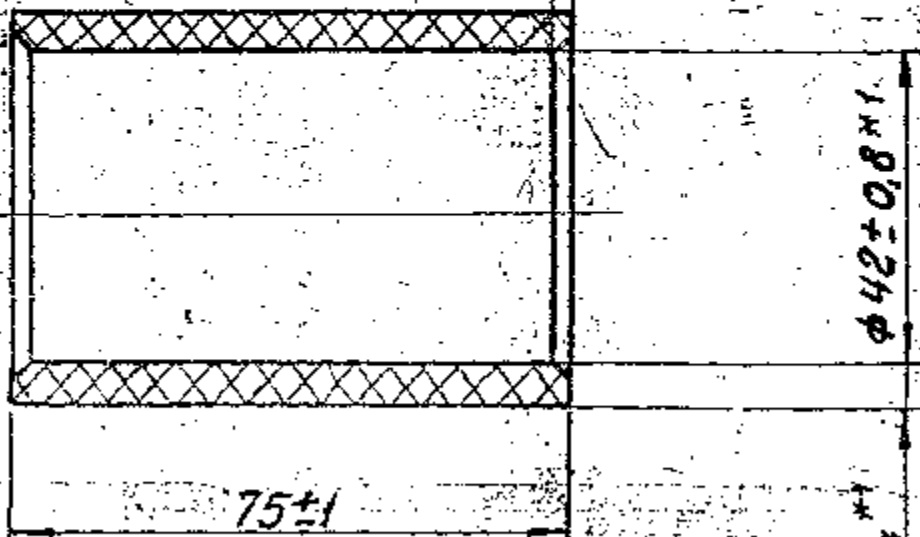

75±1

 $\phi 42 \pm 0.8$

55±0.8

1. HOSE 40Y42-0.7 (7) TY 0056016-80.

2. COMPONENT FACES SHOULD BE COATED WITH RUBBER CEMENT, GRADE 23C-A TY 38-105290-75

3. DIMENSIONS FOR REFERENCE.

A-7

108

PILOT SAMPLE SHOULD BE APPROVED BY A H S P BEFORE BULK PRODUCTION.

EST. WT.

0.12 kg.

TO BE STAMPED OR MARKED WHERE

INDICATED THUS: $\frac{+}{-}$ (LETTERS)

ALL SHARP EDGES AND CORNERS TO BE REMOVED UNLESS OTHERWISE STATED MACHINED CORNERS TO HAVE R OUTSIDE R INSIDE EQUIVALENT CHAMFERS ARE PERMISSIBLE.


MATERIAL:-

HOSE *

USED ON

CB.3321.00.16.

ISSUE / DATE NATURE OF AMENDMENTS

DRN *g.w.* SCALE: 1:1
DIMENSIONS IN mmCONTROLLERATE OF QUALITY ASSURANCE (HEAVY VEHICLES)
AVADI.TOLRANCE ON DIMENSIONS
UNLES. OTHERWISE
STATED IS 2102 -69

TITLE

HOSE

APPO *Z.P.*
DATE *6/10/88*
ALL THREADS
CONFORM TO

D S CAT NUMBER

DRAWING NUMBER

321-20

SIZE A4