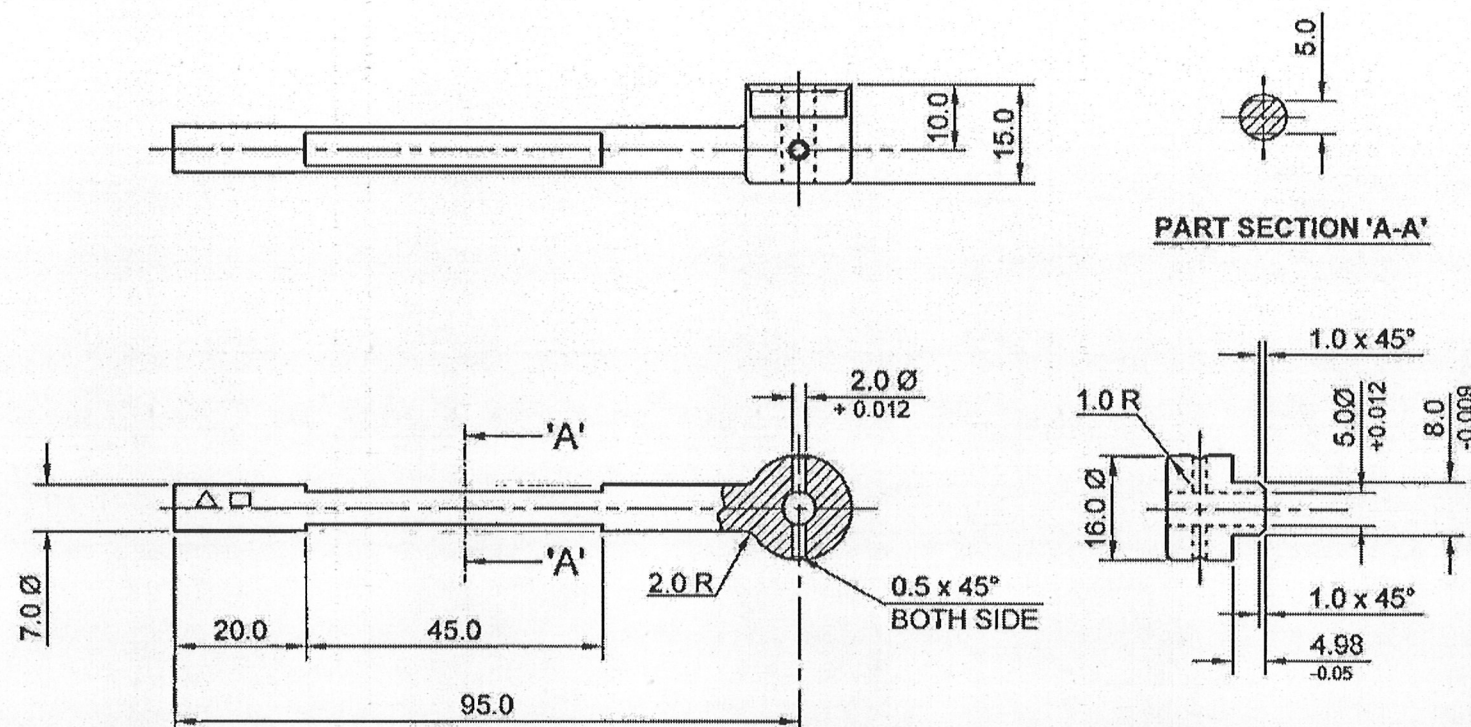


1005-557932

ON
DS CATDRAWING CONVENTIONS CONFORM TO JSG : 0104.
DIMNS. ARE IN mm. GEN. TOL. "MEDIUM" IS : 2102.

NOTES :-

REMOVE ALL SHARP EDGES & BURRS

MARKING NOTE :-

TO BE MARKED ON COMPONENT BY
STAMPING IN 2mm LETTER SIZE

△ MANUFACTURER'S CODE

□ Yr. of Mfg.

05.10.16/26955-SA		MATERIAL AMENDED		DRN. <i>SK</i>		CHD. <i>SK</i>		TRD.		COMP.		AHSP CQA(SA), ICHAPUR	
30-09-08/26435-SA		DRG SEALED PROV.		30-09-08		I/C; D.O.		Dt. 30-09-08		FOR CQA(SA)		ASSY. 1005-557931	
DATE AUTHY		BRIEF RECORD		ZONE I/C; D.O.		G.O.		H.T./HARDNESS:-		325 TO 375 HV.		DGNR'S REF. ARDE SK 3146 DET. NO. 32	
SEALED:- PROV SEALED DC NO. 26435-SA Dt. 30-09-08.		SIGN.		COPY COPY		MATERIAL :-		1S: 5517-1993, DESIGNATION 40 CB.		PART No.		DRG. No.	
NOMENCLATURE:-		ROD, CARRYING HANDLE		PROTECTIVE FINISH		PHOSPHATE TO SPECN. JSS-0465-01-1994 CLASS II (ACCELERATED), OIL FINISH.		D.S.CAT. No.		1005-557932			