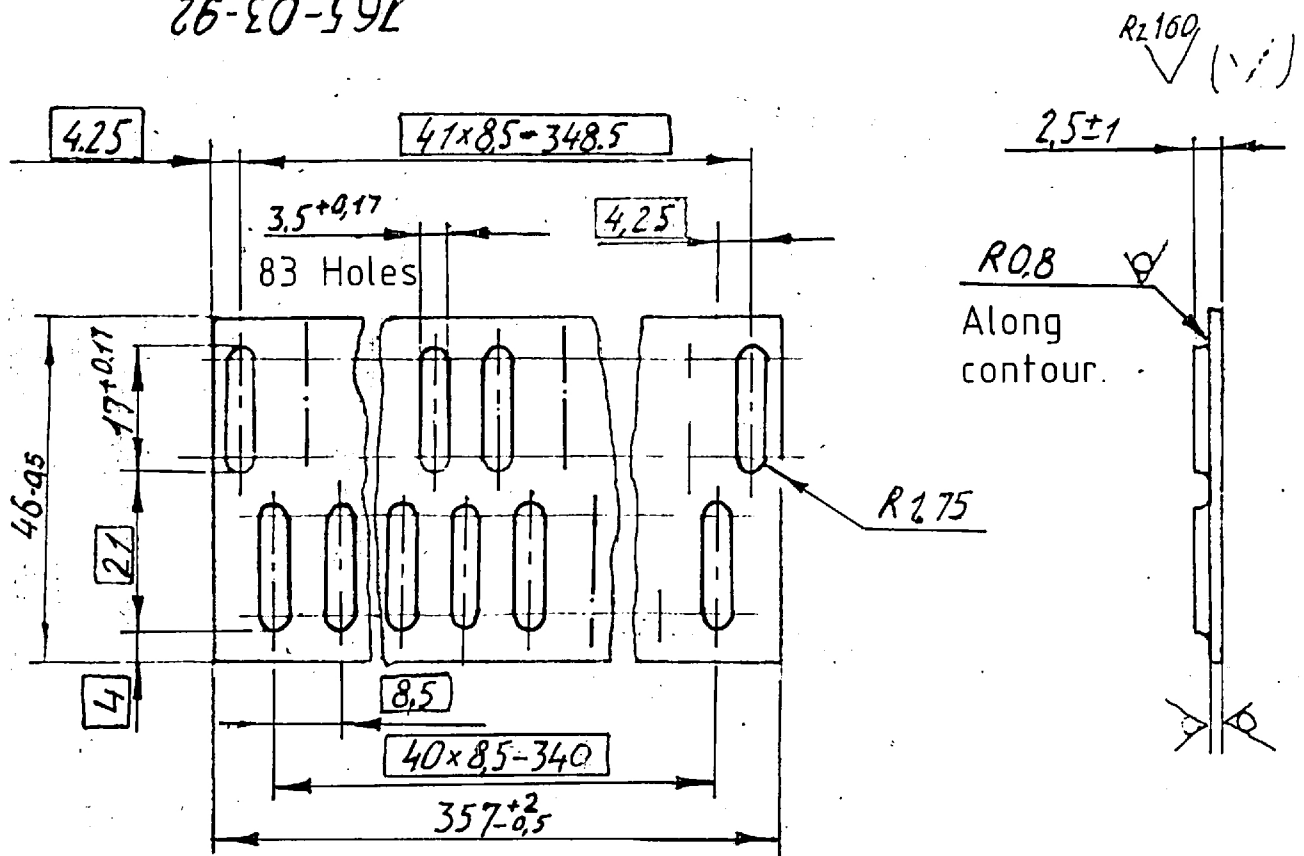




765-03-92



1. Alternate material is band 0.1M2M and 0.1M3M, GOST 20707-75.
2. Displacement of centres of holes from true position should not exceed 0,15 mm.
3. Die knock-out traces not exceeding 0,3 mm in depth are allowed. Dents are not allowed.
4. Beading of holes may be broken.

USED ON. 765-03-C6167

APPROVED	 H VASU	765-03-92		
CHECKED	 S. Kumar	PLATE	WEIGHT	SCALE
CONTROLLERATE OF INSPECTION (ICV)			0.014	
		SHT	SHTS	
		BAND 0.1 П63Т GOST 20707-75		

