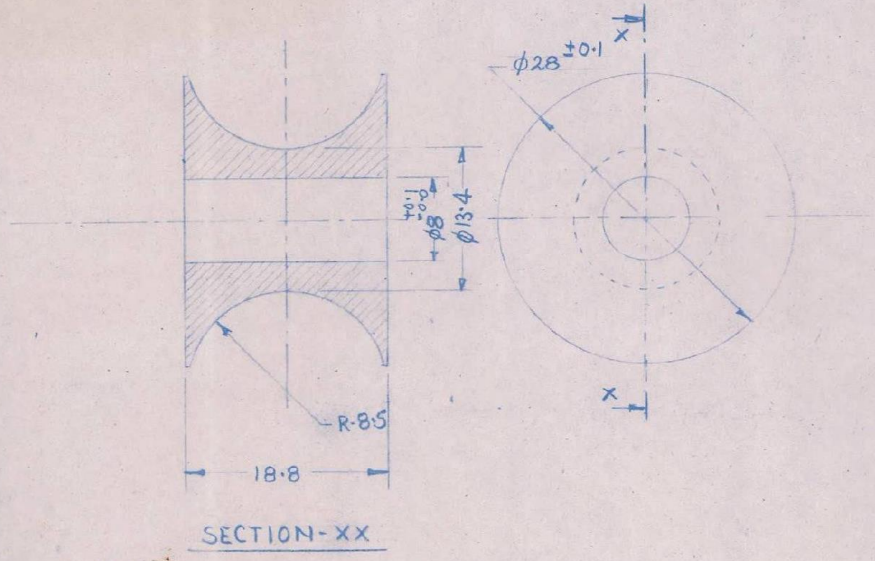

SECTION-XX

MATERIAL :-
STEEL BAR TO GRADE C-40 AS PER IS:2073-1962 IN NORMALISED CONDITION.

FINISH :-
TO BE SMOOTHLY FINISHED AND ZINC PLATED AS SPECN. IS:1573-1970 GD-4 WITH AVERAGE THICKNESS 0.025mm.

HARDNESS :-
AVERAGE 180/190 B.H.N

PACKING :-
EACH THIMBLE SHALL BE PACKED IN A POLYTHENE BAG OF SUITABLE SIZE AND TIED, THE MOUTH HEAT SEALED. 20 Nos. SHALL BE PACKED IN A SUITABLE SIZE CARTON. 10 Nos OF SUCH CARTON SHALL BE PACKED IN A C.W.P (DULY LINED WITH PAPER PACKING WATERPROOF). ONE THIMBLE IN EACH CARTON SHALL BE IDENTIFIED BY A LABEL SHOWING CAT No. DESIGNATION OF THE STORE AND ALSO THE RECOGNISED INITIALS OF THE MANUFACTURER. EACH CARTON SHALL BE MARKED WITH 'THE INITIALS OF THE MANUFACTURER. THE PACKING CASE SHALL BE LEGIBLY AND INDELIBLY MARKED WITH THE ADDRESS OF THE CONSIGNEE, CONSIGNER, CAT No., MANUFACTURE OF STORE, THE YEAR OF MANUFACTURE, TOTAL No. OF PACKING CASES AND THE No. OF INDIVIDUAL PACKING CASE IN THE CONSIGNMENT.

CO-ORD R.C.M.A.(N)

a	14/8/2K	—	PAS/269	CHANGE IN NOMENCLATURE	HEAD QA
R.No.	DATE	ZONE	AUTHORITY	BRIEF RECORD	

DRN	S.C.SHARMA	DRD	MATERIAL :- AS SPECIFIED ABOVE
CHD		O/C 23-11-00 PGD 24.11.00	FINISH :- AS SPECIFIED ABOVE
TRD			
COMA			
SCALE:- 2:1		PROJ. OFFR	HEAT TREATMENT
		DIV. HEAD	

DIMENSIONS ARE IN mm
TOLERANCE IS:2102 (PT-I) MEDIUM

PULLEY FOR ROTATING CANOPY PILOT P'CHUTE FOR MIG-21/PSM SERIES

ADRDE, AGRA

APPROVED
PROG. DIRECTOR (Q.A)

DRG. No. ADRDE/1319 (a)