

4

3

2

1



THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE PROPRIETARY AND CONFIDENTIAL TO OFT. NO PERSON OR ENTITY IS ALLOWED TO COPY, REPRINT, REPRODUCE OR PUBLISH ANY PART OF THIS DOCUMENT, NOR DISCLOSE ITS CONTENTS TO OTHERS, NOR MAKE ANY USE OF IT, NOR ALLOW OR ASSIST OTHERS TO MAKE ANY USE OF IT UNLESS BY THE PRIOR WRITTEN EXPRESS AUTHORIZATION OF OFT AND THEN ONLY TO THE EXTENT AUTHORIZED.
COPYRIGHT-OFT.

SHEET REV STATUS
ALL SHEETS ARE THE SAME REVISION

REVISION RECORD				
REV	ECO	DESCRIPTION	DATE	APVD
01		Freeze	14-Sep-17	E. Reshef
02		Freeze	14-Jan-18	Y. Shapira
-	T00063	Identical To Previous Released	08-Apr-18	L. Goldshtein
A-	EE0441/00	Released	13-Jan-19	E. Itzcovich

NOTES:

- INTERPRET THIS DRAWING IAW ASME Y14.100M.
- MATERIAL: ALUMINUM ALLOY SHEET 5052-H32 PER AMS-QQ-A-250/8. (EQUIVALENT MATERIAL IS PERMITTED AFTER ELBIT APPROVAL).
- GENERAL TOLERANCES ACCORDING TO ISO 2768-m.
- DEBURR AND REMOVE SHARP EDGES APPROX. 0.3X45°.
- FINISH:
5.1. ANODIC COATING PER MIL-A-8625 TYPE II 15 TO 25 MICRON THICK CLASS 1.
- QUALITY ASSURANCE PROVISIONS:
6.1 QUALITY ASSURANCE PROVISIONS FOR THIS ITEM PER RDMQD00012P.
- PACKAGING AND PACKING:
THE FINISHED PART SHALL BE PRESERVED AND PACKAGED IN ACCORDANCE WITH COMMERCIAL PRACTICE.
- IDENTIFY PER MIL-STD-130 PARA 4.1.B, BY LABELING ITS CONTAINER WITH THE PART NUMBER. CHARACTERS 1.25 MM HIGH.

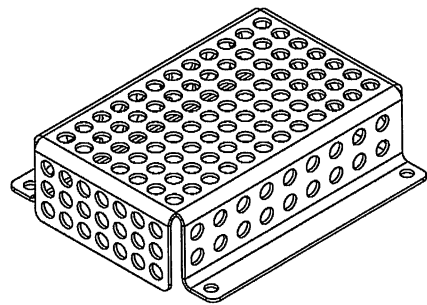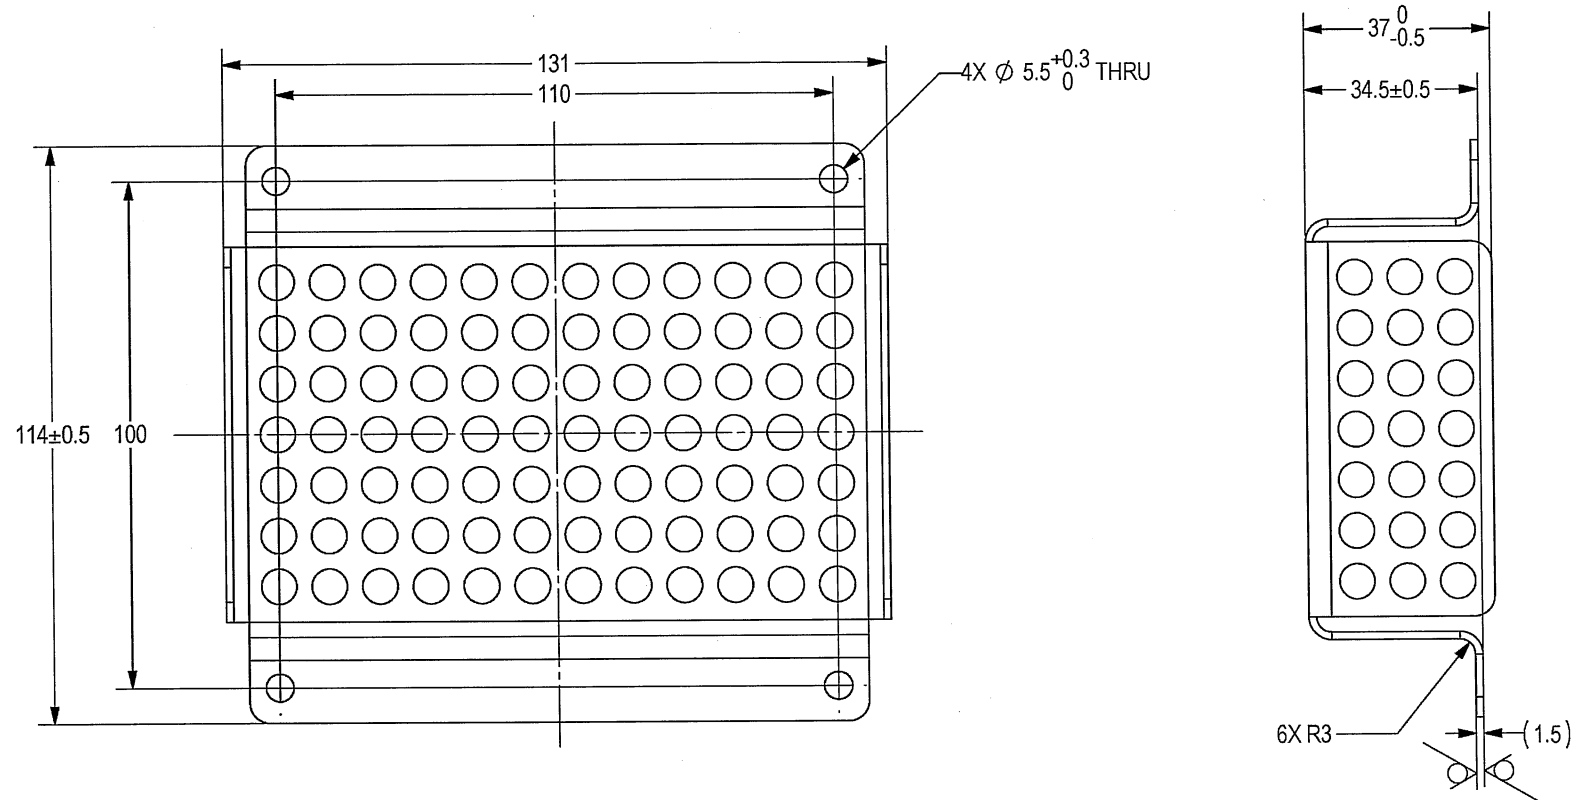

(WEIGHT APPROX.: 0.08 Kg)

SEE ATTACHED MEDIA

UNLESS OTHERWISE SPECIFIED		SIGNATURE	DATE	ORDNANCE FACTORY TIRUCHIRAPPALLI	
DIMENSIONS ARE IN MM PER ASME Y14.5 - 2009		DRAWN	14/1/20	FOR: COVER TOP ASSY	
TOLERANCES		CHECKED		TITLE	
LINEAR	ANGULAR	HOS/DDO	P. J. 3/9/20	CASE, DESICCANT	
SEE NOTE 3.	SEE NOTE 3.	OFFICER/PRODN		SIZE	CAGE CODE
1st ANGLE PROJECTION		OFFICER/OC		C	2291A
SURFACE TEXTURE IN MicroMeter		OFFICER/DDO	3/9	DWG NO	Y17736A-00
6.3 / (10)		PROJECT		SCALE	1:1
		PLM Control		AUTOMATED DRAWING (SW)	Y17736A-00
				SHEET 1 OF 1	A-

DWG NO
Y17736A-00

SH
1

4

3

2

1