D.S.CAT. NO. 1005 - 560044

DRAWING CONVENTIONS CONFORM TO JSG-0104	
DIMNS ARE IN mm.	GEN. TOL. MEDIUM TO IS: 2102

MARKING ON SAMPLE BY STAMPING AS SHOWN IN THE DRG
MINIMUM SIZE OF LETTER 2 mm.

▽ Yr. Of Mfg.

† MANUFACTURER'S CODE.

TOLERANCES FOR ANGLES ± 30' UNLESS OTHERWISE STATED.

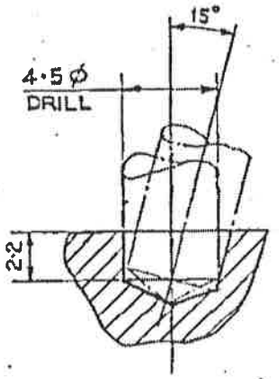

ENLARGED PART SECTION AT 'P-P'

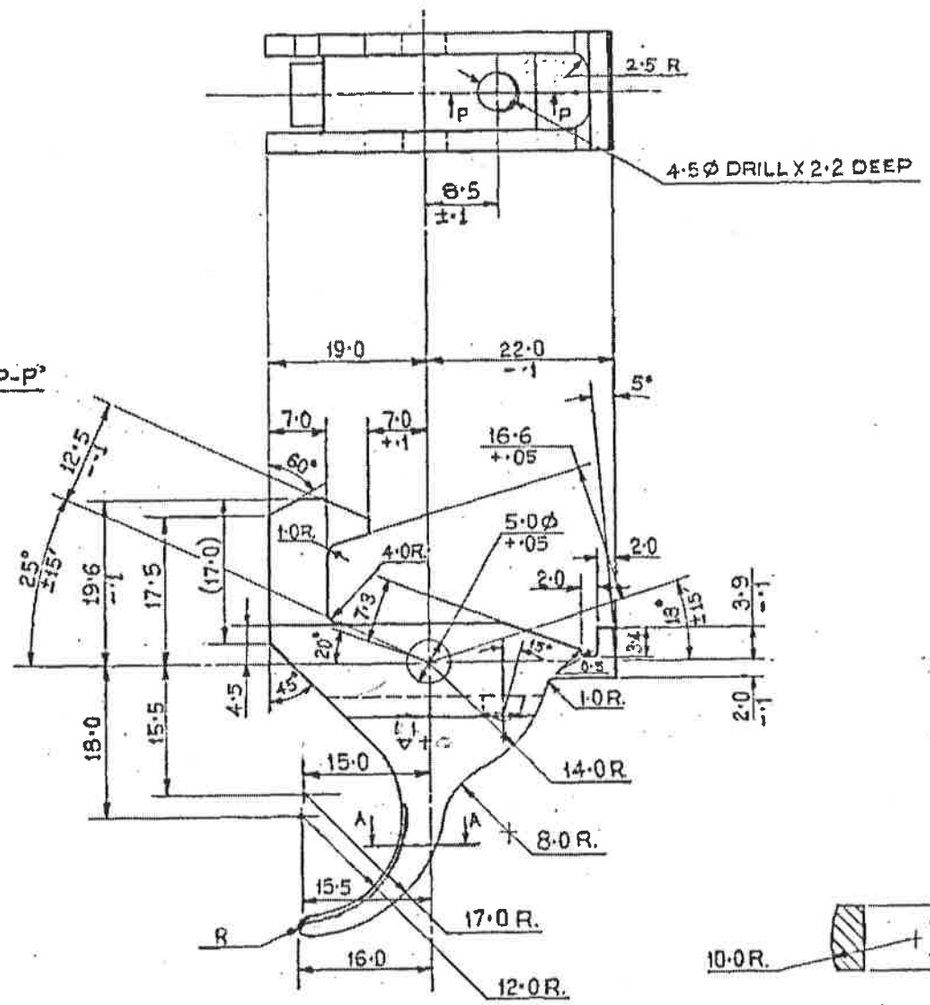



SECTION 'A-A'

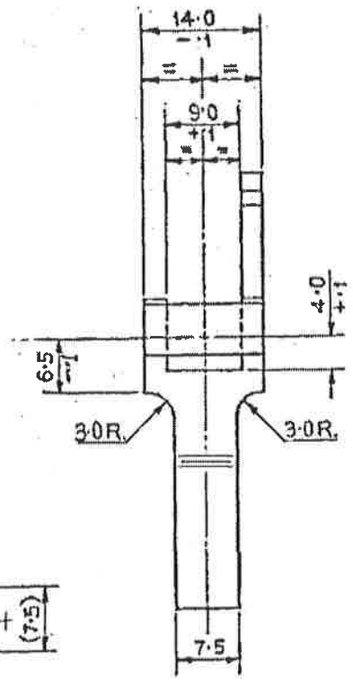

NSN: B1/1005-72-0000044

DATE.	AUTHY.	BRIEF RECORD	ZONE	I/C: D.O	G.O.
30-11-10	26554-SA	IN ASSY. 1005-560625 WAS CQA(SA)SK-763 & 1005-560058 ADDED.			
19-07-10	26525-SA	NSN ADDED.			
02-01-10	26482-SA	IN ASSY. CQA(SA)SK-763 WAS 1005-560058			
31.7.2003	25831-SA	MARKING NOTE AMENDED.			
02-05-03	25755-SA	MARKING NOTE AMENDED & PLACE OF MARKING SHOWN ON DRG.	D/3		
01-01-03	25636-SA	D.S.CAT.NO. 1005-560044 ADDED & IN ASSY. COLUMN. D.S.CAT.NO. 1005-1500 & WAS CQA(SA) SK-454/1.			
04-9-2001	25114-SA	DRAWING PROV. SEALED			

SEALED :- PROV. DC. NO. 25114-SA DT. 04-9-2001.

SIG.

NOMENCLATURE :- TRIGGER

DRN. M.K.R.C. CHD. TRD. COMP.

SCALE :- 2:1 & 5:1 EST. MASS.

APPROVED DAC

DT. 3.9.01 I/C. D.O. DT. 3.9.01 FOR CQA(SA)

MATERIAL :- STEEL B.S.970 PART-1:1983 GI.655 M13

H.T./HARDNESS :- CASE HARDENED TO A DEPTH OF 0·1370·26 500 TO 550 H.V.

PROTECTIVE FINISH :- PHOSPHATED TO SPCN. JSS:0465-01: 1988 CLASS II (ACCELERATED) OIL FINISH.

AHSP CQA(SA), ICHAPUR

ASSY. 1005-560625 1005-560058

DGNR'S REF. ARDE SK 3144 / 124

PART NO.

DRG. NO. CQA(SA) SK 454/1/1

D.S.CAT. NO. 1005 - 560044