


ЕСКЦ

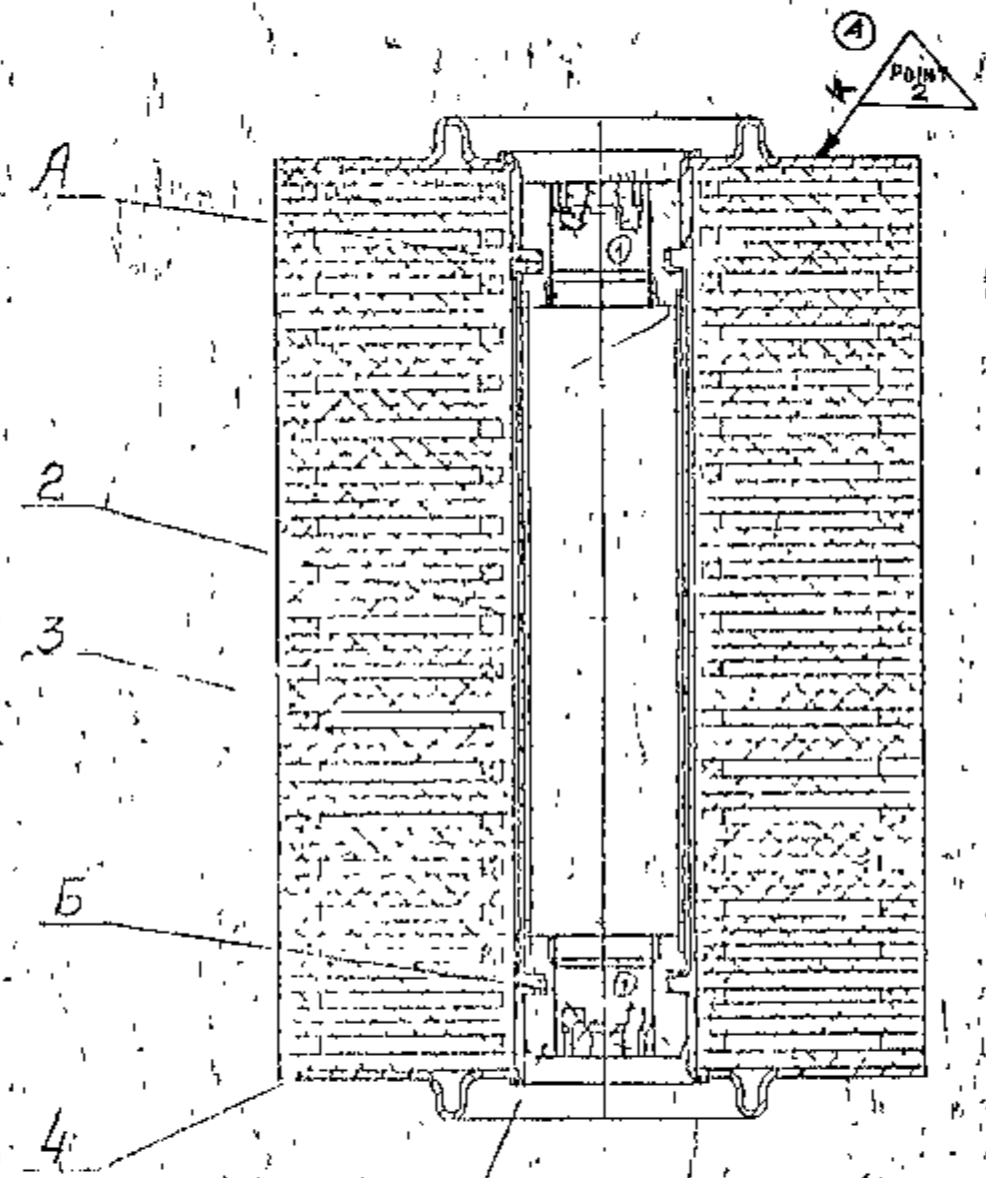

Деталь поз 2 одеть на дет.поз 1, в канавках А, Б, затянуть шнур до внутреннего диаметра канавок, связать шнур одинарным узлом. Концы шнура обернуть вокруг сетки по канавке 1, 2 раза, связывая их каждый раз одинарным узлом.

1. COMP 2 SHOULD BE FITTED ON COMP 1. CORD SHOULD BE TIGHTENED UP TO THE INNER DIAMETER OF GROOVES A AND B AND TIED WITH SINGLE KNOT. ENDS OF CORD SHOULD BE WOUND AROUND THE STRAINER ALONG THE GROOVE 1-2 TIMES, TIED WITH SINGLE KNOT EVERY TIME.

② TO MARK CHEMICALLY AS PER UJ 581-05.

PILOT SAMPLE SHOULD BE APPROVED BY A H S P BEFORE BULK PRODUCTION

		EST. MASS 0.41 Kg.	TO BE STAMPED OR MARKED WHERE INDICATED (IN THIS LETTERS)
		ALL SHARP EDGES AND CHAMFERS TO BE REMOVED UNLESS OTHERWISE STATED. MATERIAL CHANGES TO HAVE A OUTSIDE A INSIDE EQUIVALENT, DIMENSIONS ARE PERMISSIBLE.	
A	6-3 98	AUTHY NOTN NO: 87-338	MATERIAL: USED ON - CB 3329-00-13 CB 20-29-00-8
ISSUE	DATE	NATURE OF AMENDMENTS	
DIM	MM	SCALE: 1:1	CONTROLL RATE OF QUALITY ASSURANCE (HEAVY VEHICLES) AVADI
CHD	MM	DIMENSIONS IN mm	
ICD	MM	TOLERANCE ON DIMS UNLESS OTHERWISE STATED	TITLE: ASSY FILTERING ELEMENT
APPO	DATE		
DATE	2.2.28	ALL THREADS TO CONFORM TO	D S CAT NUMBER
			DRAWING NUMBER CB 329-05-7 CB

33064 1004 33064



