


421-20

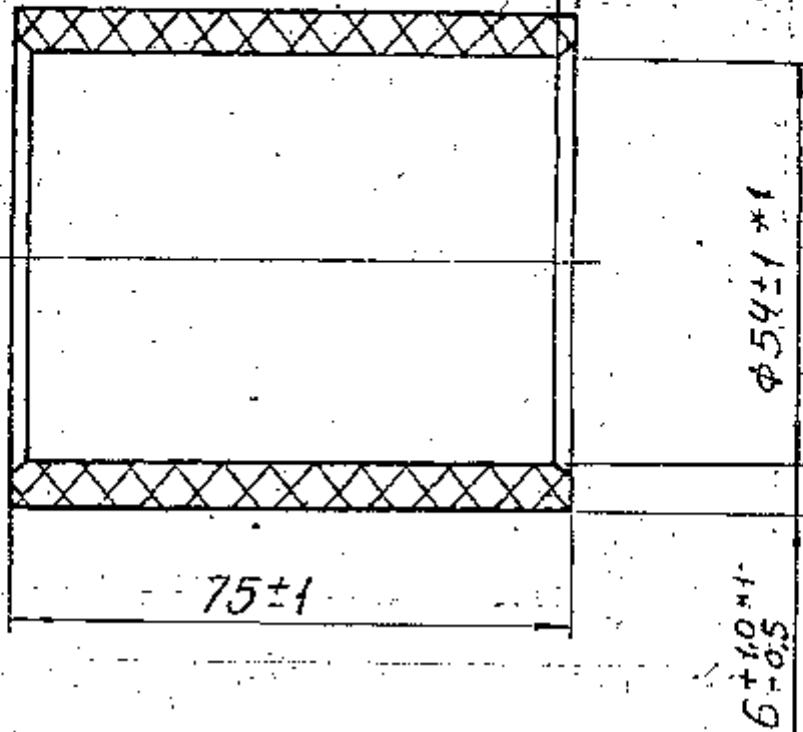

- * 1 HOSE 40Y 54-0.7 (7) TY 0056016-80.
- 2. COMPONENT FACES SHOULD BE COATED WITH RUBBER CEMENT, GRADE 23C-A TY 38-105290-75;
- 3.* DIMENSIONS FOR REFERENCE.

F-7
109

PILOT SAMPLE SHOULD BE APPROVED BY A H S P BEFORE BULK PRODUCTION.

		EST. WT. 0.139 kg.	TO BE STAMPED OR MARKED WHERE INDICATED THUS ≡ I (LETTERS)	
		ALL SHARP EDGES AND CORNERS TO BE REMOVED UNLESS OTHERWISE STATED MACHINED CORNERS TO HAVE R OUT-SIDE R INSIDE EQUIVALENT CHAMFERS ARE PERMISSIBLE.		
		MATERIAL :- HOSE *	USED ON CB. 3321-00-16	
ISSUE DATE	NATURE OF AMENDMENTS			
DRN	SCALE :- 1:1	CONTROLLERATE OF QUALITY ASSURANCE (HEAVY VEHICLES) AVADI.		
CHD	TOLERANCE ON DIMENSIONS UNLESS OTHERWISE STATED IS 2102 -69		TITLE HOSE	
APPD	ALL THREADS CONFORM TO		D S CAT NUMBER	DRAWING NUMBER 421-20
DATE				