


1005-001762

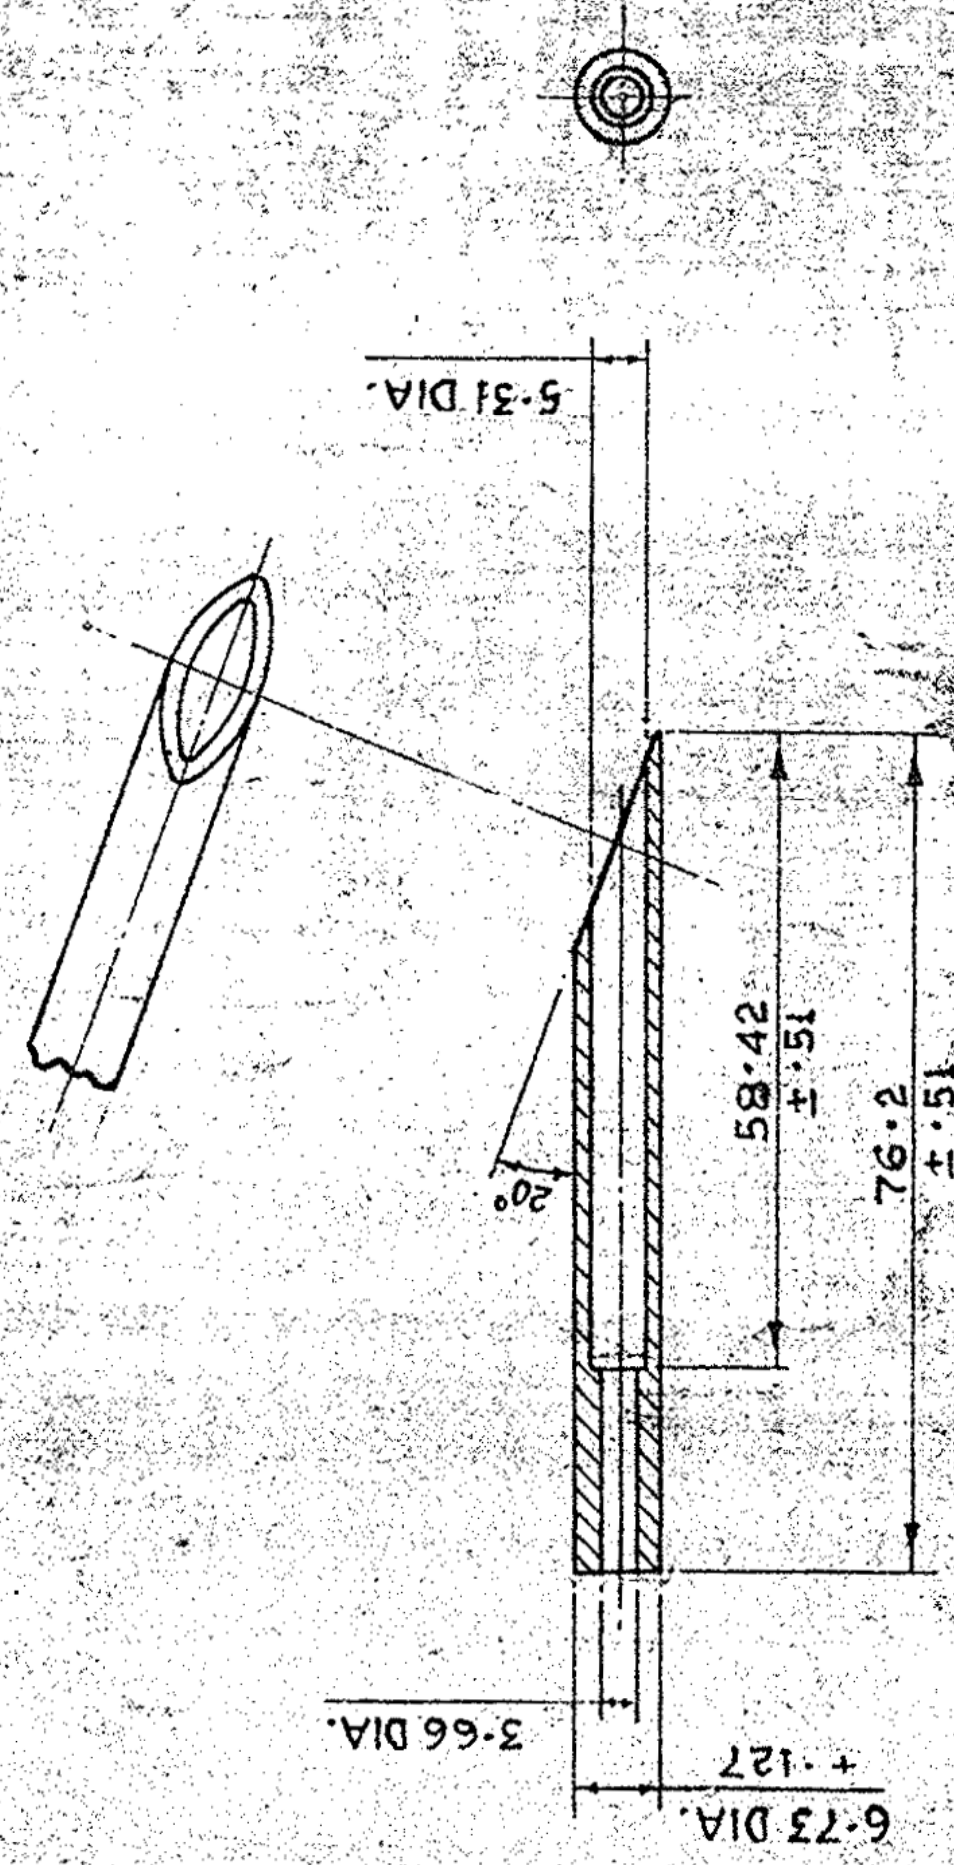

SPECN. NOTE:-
FOR SPECIFICATION LATEST ISSUE SHOULD
BE FOLLOWED.

HEAT-TREATMENT:-
HARDENED & TEMPERED TO V.P.N 375-450.

PROTECTIVE FINISH:-
PHOSPHATE TO SPECN. JSS 0465-01:1988,
CLASS II, OIL FINISH.

MATERIAL:-
BS 970 PT. 5:1972 Gr. 070A72 OR 070A-
78 OR BS 970 PT. 1:SEC.2 Gr. 070M55

APPROVED COPY BY THE ENGINEER
 11/9703

20979-SA	31.10.90	CL.NEG. RETRACED AND DRG. RESEALED	980
		PREVIOUS D.G. No. 16222 -SA, 16253-SA, 19856-SA	COPY.
AUTHY.	DATE	BRIEF RECORD	SIG.
		DATE	NAME
		DGN.	
		DRN.	
		CHD.	
	31.8.90	TRD.	Bharan
	7.9.90	COMP.	Prasad
			16.00.

FOR EXPLANATION OF DIMENSIONING ETC. SEE ARDE NOTE SHEET No 1.

ASSY DRG. No	1005-001760	CQA(SA) ICHAPUR
MATERIAL:-	AS STATED	
DIMENSIONS ARE IN MILLIMETRES		
APPROVED	11.9.2.71	
CL.NEG. RETRACED		
DESIGNER'S REF	CISA/335/2	
DS CAT No.	1005-001762	

WEIGHT

SCALE:- 1:1

SEALED:- D.C.(I).
 16253-SA, DT. 10.3.80.