

Z01010-5185


ON DRAWING CONVENTIONS CONFORM TO JSG-0104
1/20 SD DIMS ARE IN mm. GEN. TOL. COARSE IS .2102

MARKING (SUITABLY) ON SAMPLE / TAG

Yr. OF Mfg.

MANUFACTURER'S CODE

DS. CAT. NO.

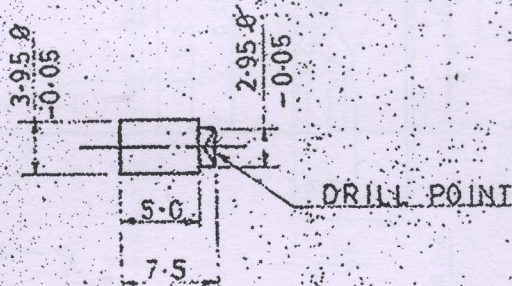

ON CONTROLLED COPY

EXTENDED CORRECT COPY
OF APPROVED DRAWINGS
AT THIS DATE 12.01.1.8.

Design & Drawing Office
Ordnance Factory,
Machirappalli 620016

5/9

R 8324
CES

23-10-2000	24850-SA	D.S. CAT. NO. 5315-010102 ADDED AND IN ASSY. COLUMN 1005-007994 WAS ARDE SK. 3303/6		And	And	DAC
09-12-97	23972-SA	PROFORMA CHANGED, NOTE DELETED, MARKING NOTE ADDED, NEG. RE-TRACED AND DRG. PR. V. RT-SEALED.		And	And	DAC
		PREVIOUS DC. NO. 23770-SA.				COPY
DATE	AUTHY.	BRIEF RECORD	ZONE	1/C:00	G.O.	
SEALED :-	PROV. DC. NO. 23770-SA, DT. 26.3.97.				SIGN.	
DRN.	CHD.	TRD. SK. 3303/6	COMP. No. 3303/6	AHSP CQ A(SA), ICHAPUR		
SCALE :- 2:1		EST. MASS		ASSY. 1005-007994		
DT. 09.12.97	And	APPROVED DT. 4.11.92				
	1/C:00	NEG. RE-TRACED				
MATERIAL :-	STEEL TO BS:970 PT.1:1983 Gd:080 M40 (En. 8)			DGNR'S REF. ARDE SK.3303/6		
H.T./HARDNESS				PART NO.		
PROTECTIVE FINISH :-	PHOSPHATE TO SPECN. JSS:0465-01:1988 CLASS II (ACCELERATED), OIL FINISH			DRG. NO.		
NOMENCLATURE :-	PIN, AXIS LOCK HOOK			DS. CAT. 5315-010102		
				NO.		

1

2

3

4