
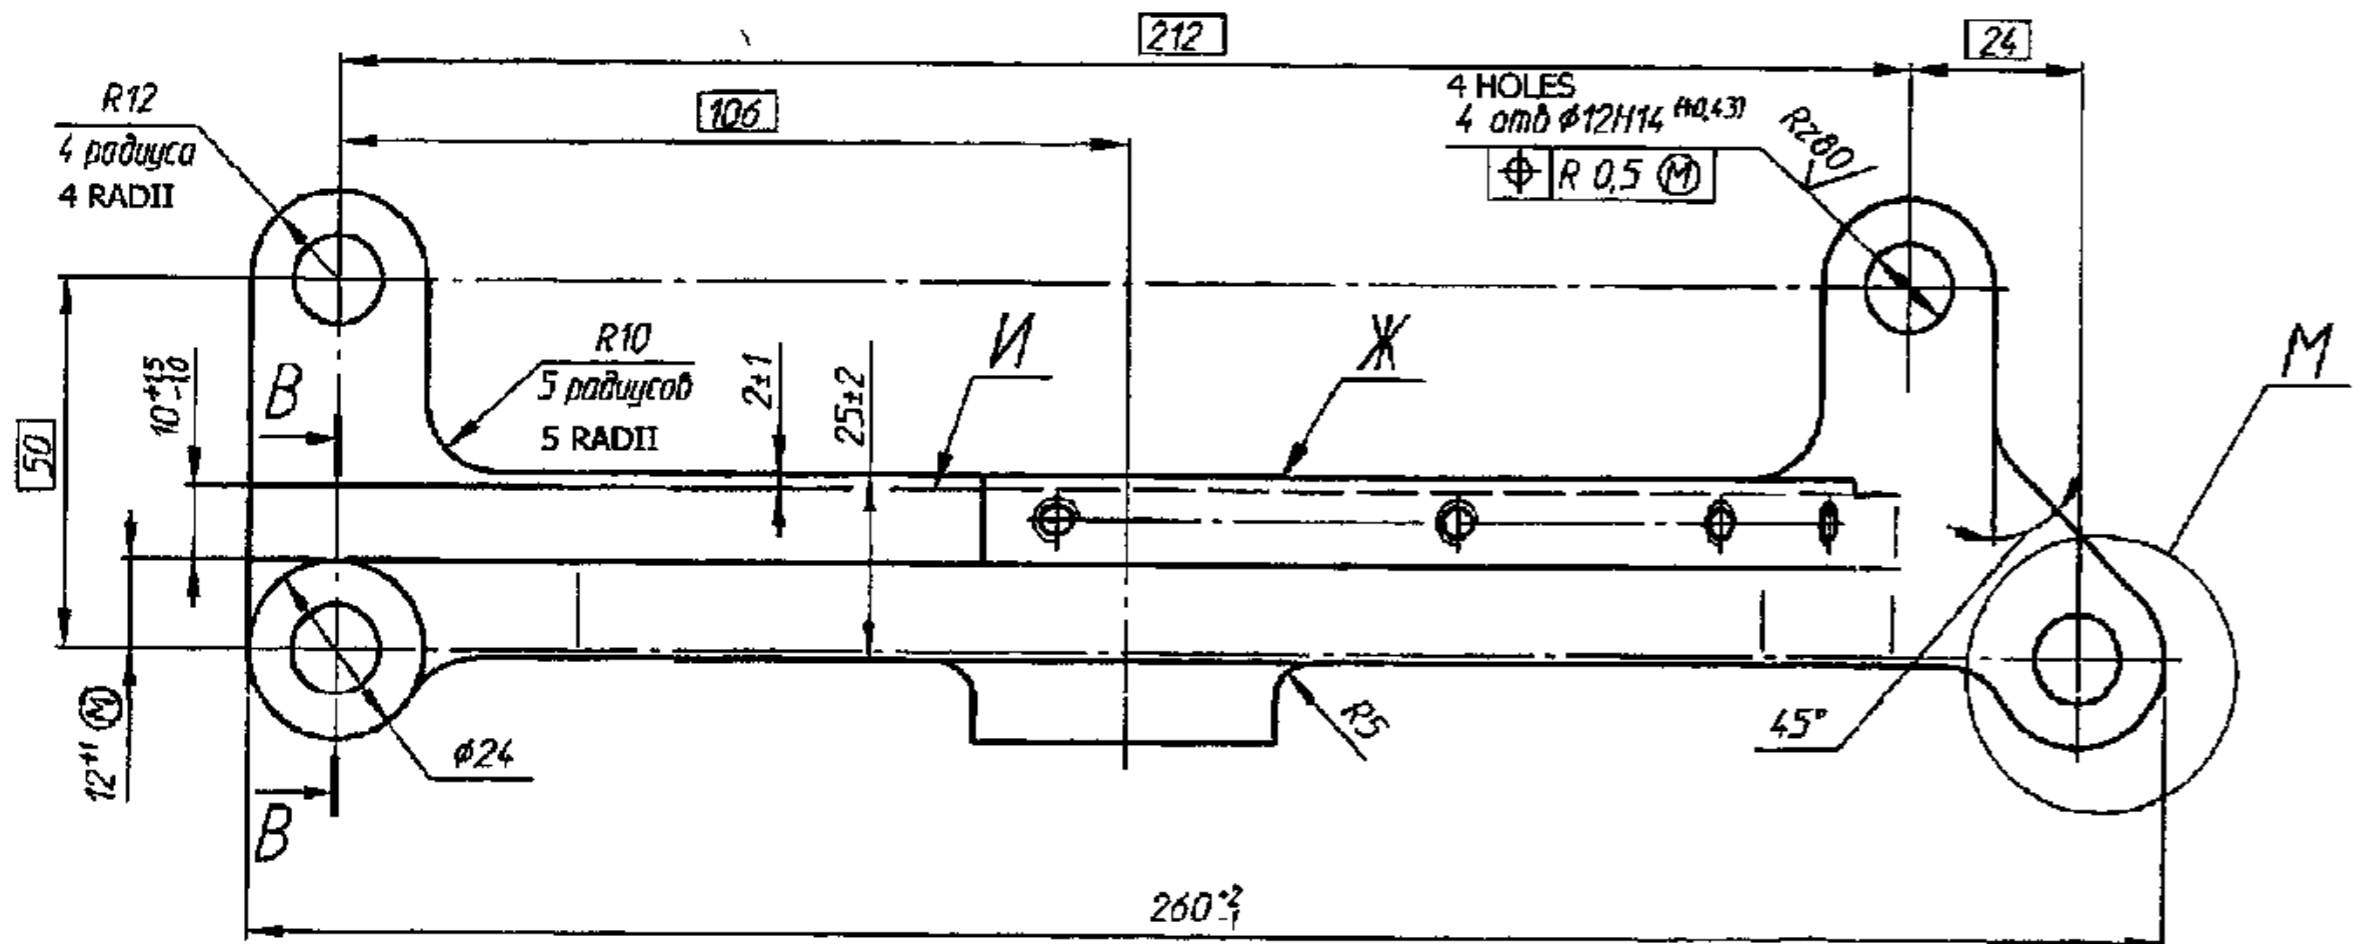
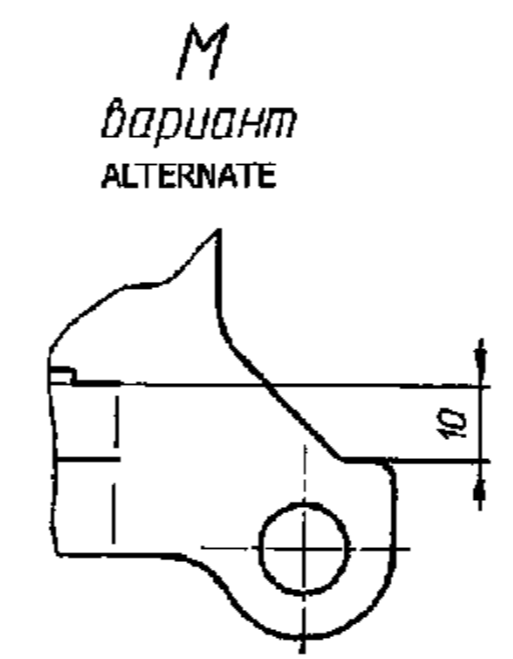
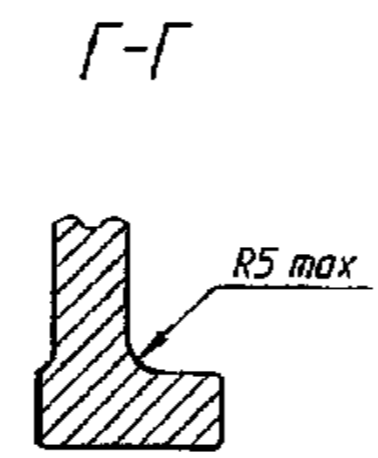
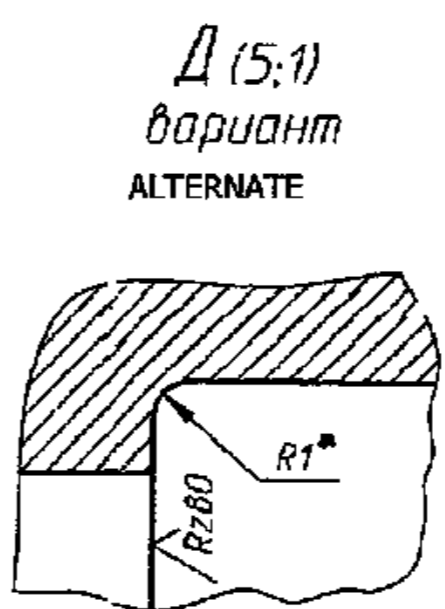
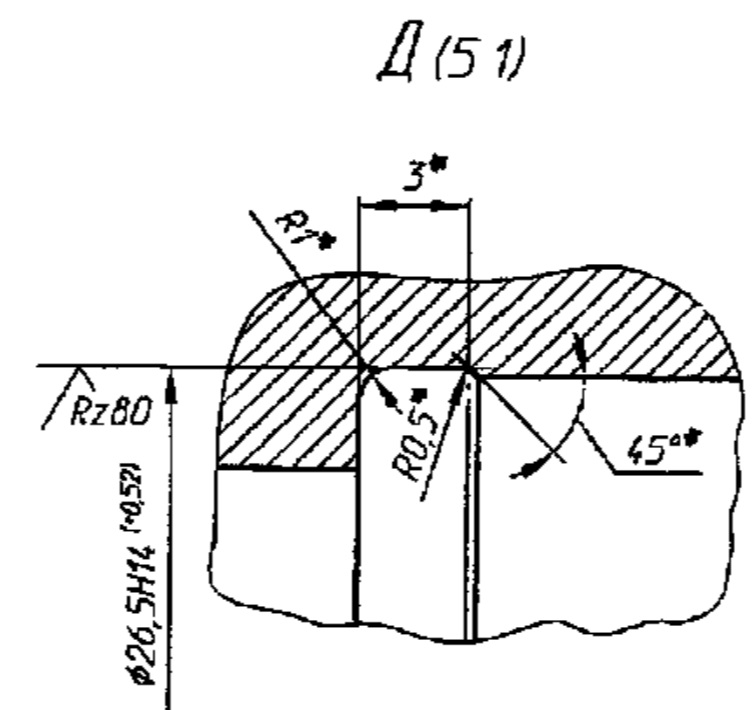
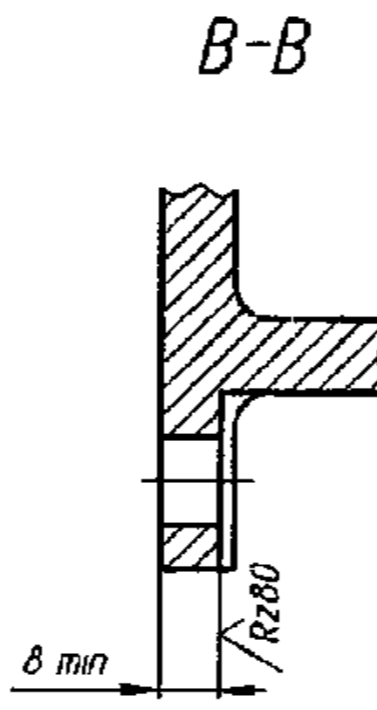
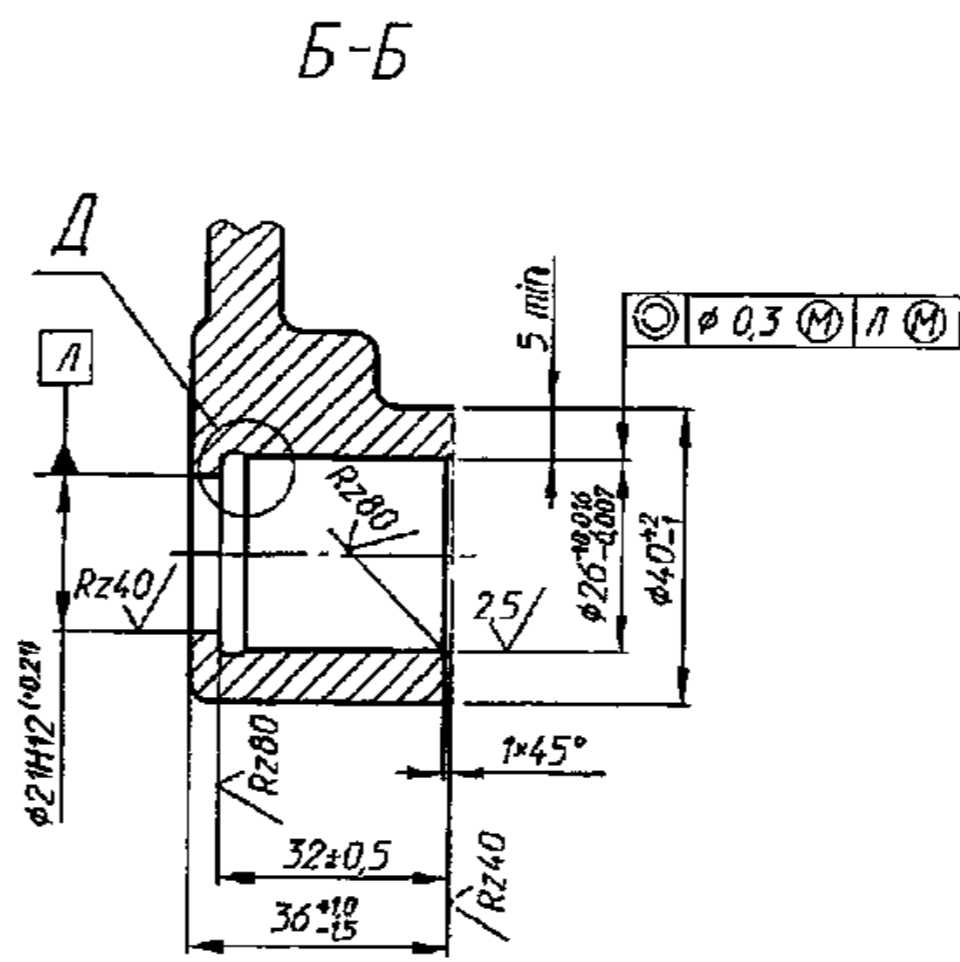
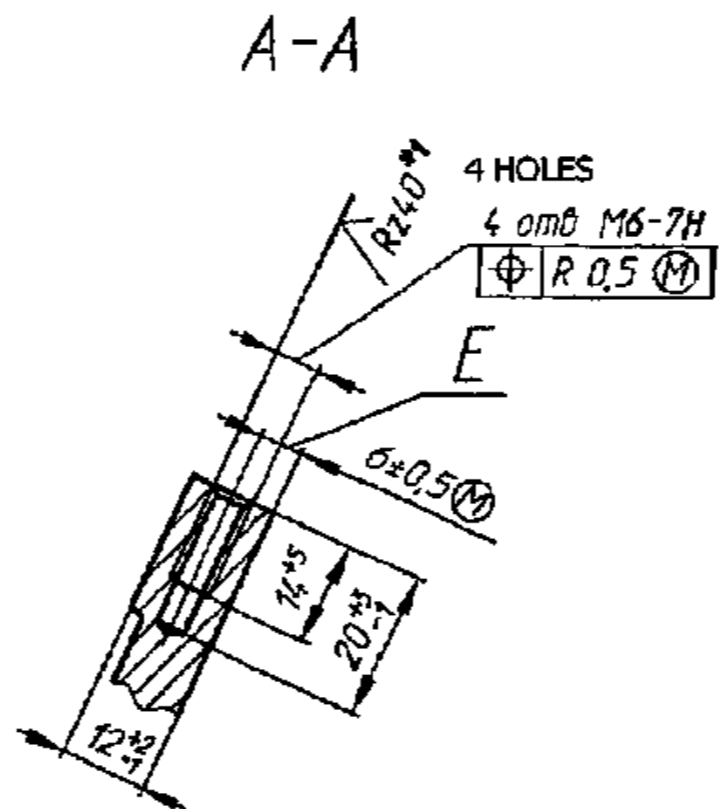


DRAWING NUMBER
172.02.903

SHEET No. 1 OF 1

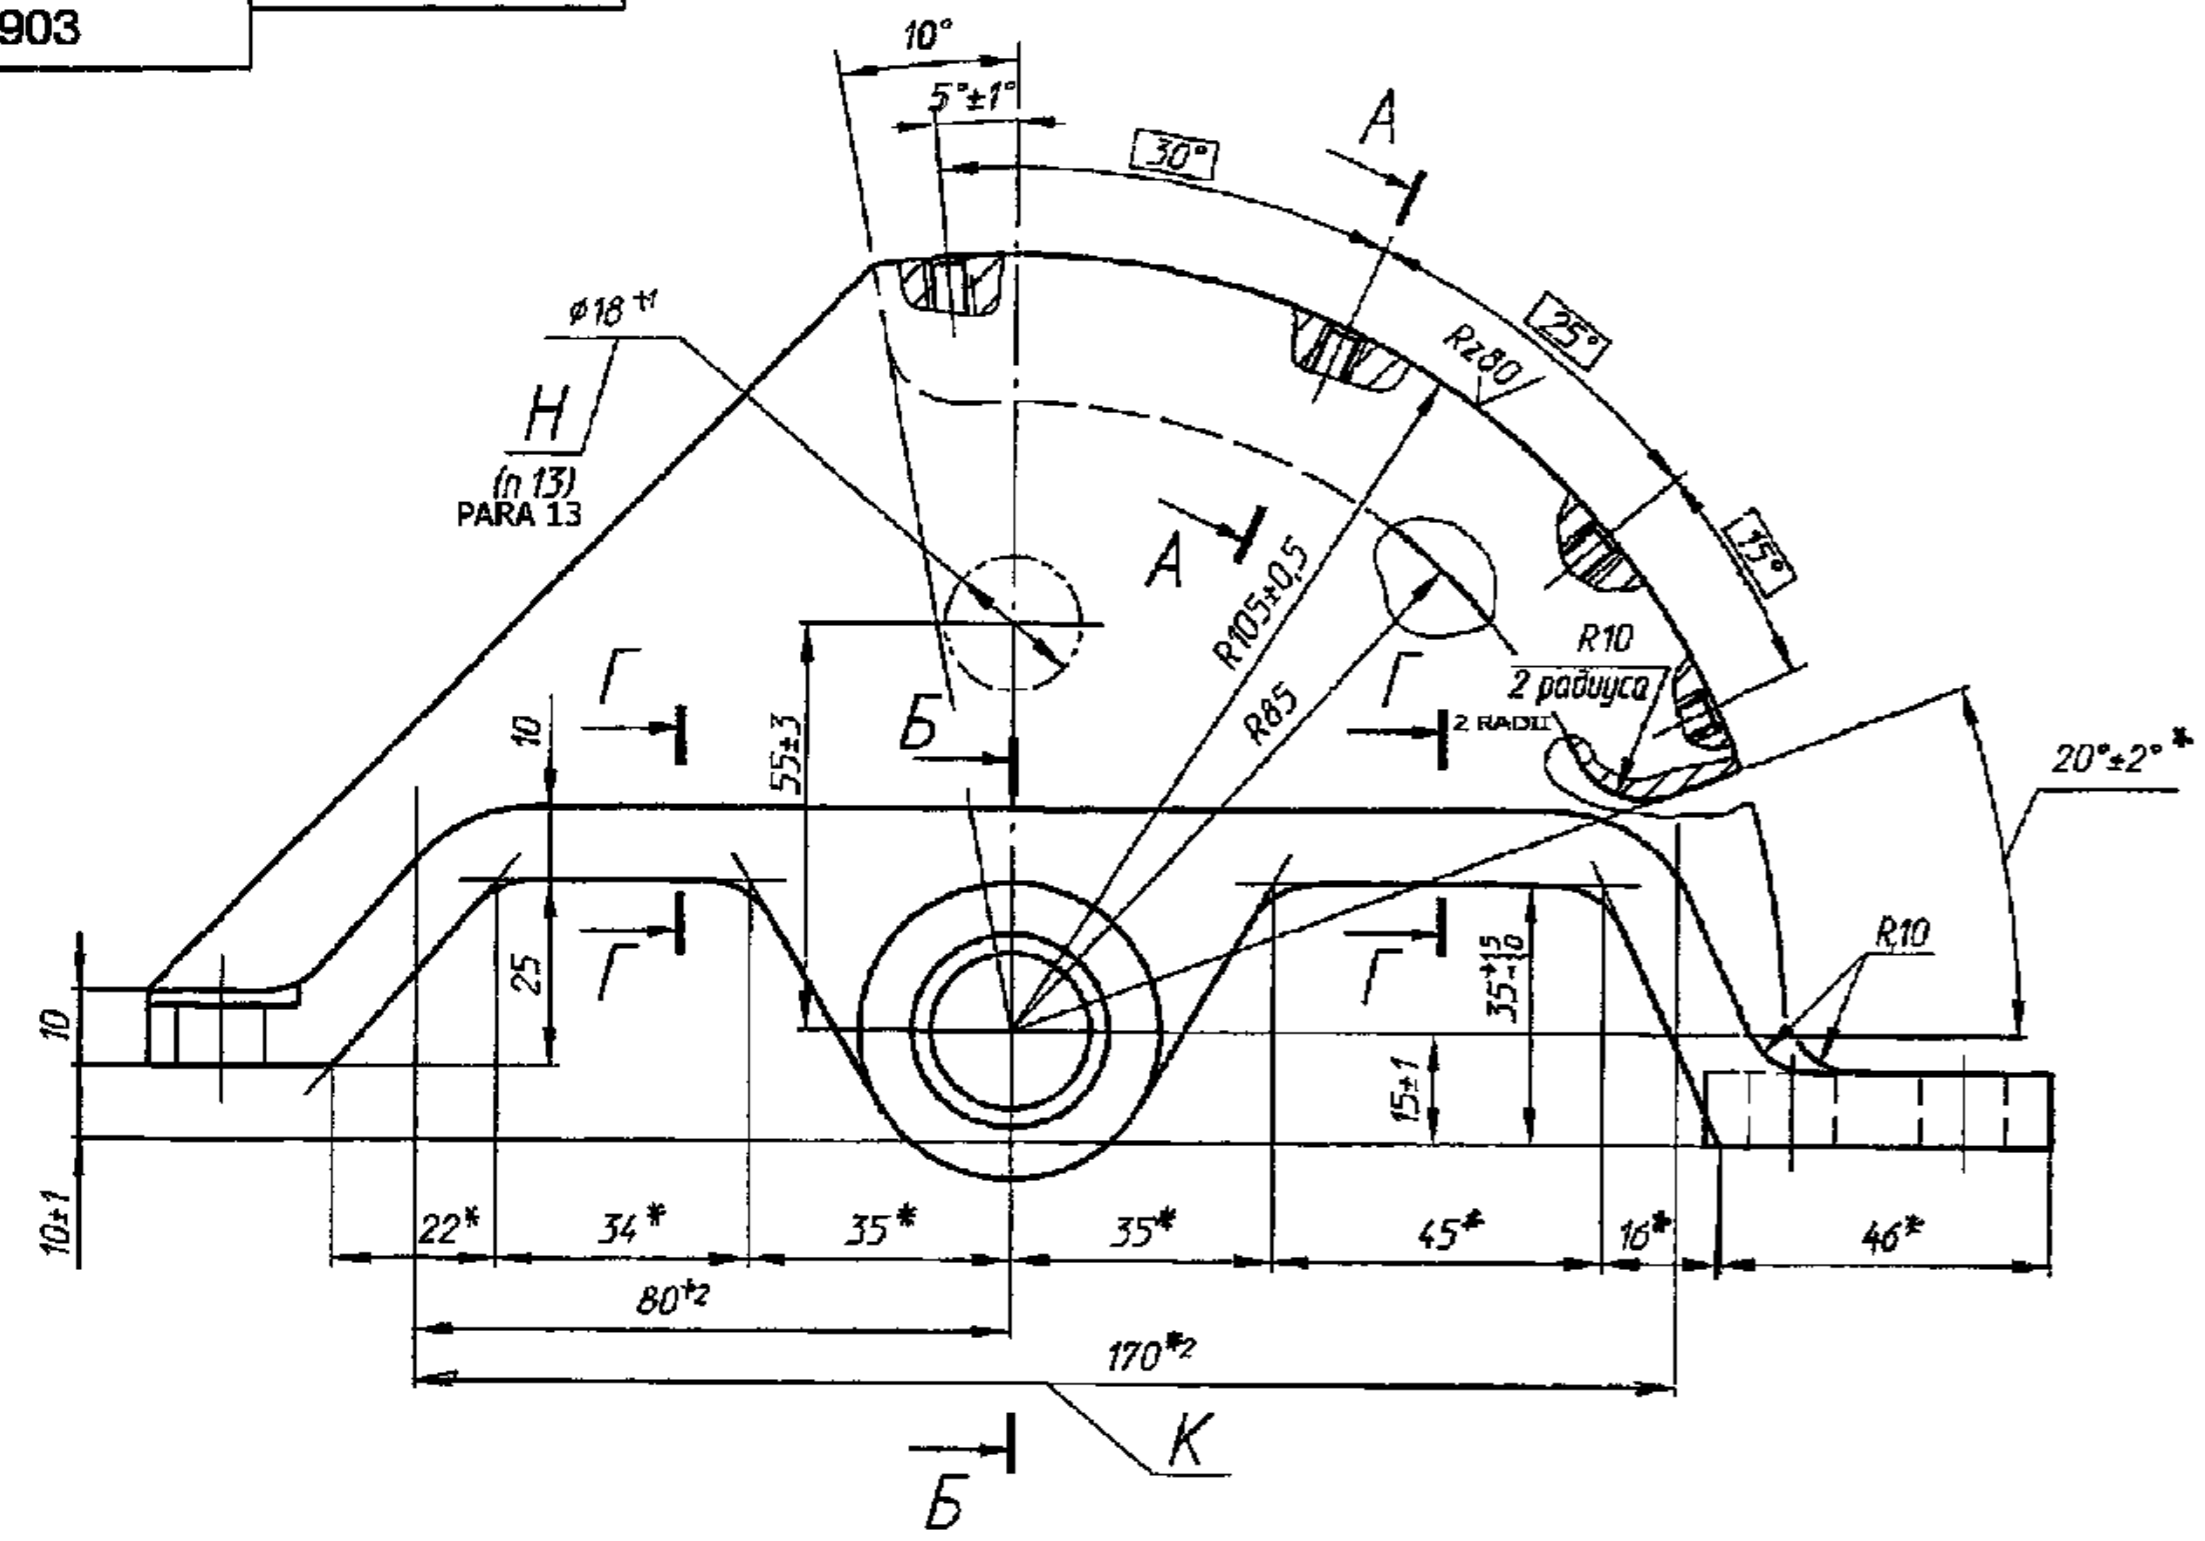

- 1 Требования к отливке по 172 ТУ6.
- 2 Литевые уклоны не более 1:20.
- 3 Неуказанные литевые радиусы скруглений 0-3 мм.
- 4 Точность отливки 9г-0-0-8 ГОСТ 26645-85.
- 5 *Размеры обеспечить инструментом.
- 6 *1 Шероховатость обеспечить инструментом.
- 7 Размер E (A-A) контролировать у крайних отверстий.
- 8 На поверхностях Ж и И (вид сверху) допускаются следы от толкателей (0±1) мм.
- 9 Твердость и механические свойства сплава по режиму Т5 ГОСТ 1583-93.
- 11 На длине К (Гл вид) допускается наличие технологических ребер высотой 3-2 мм и толщиной 2-1 мм. Количество ребер и их расположение произвольное.
- 12 *2 Размеры для справок.
- 13 Допускается наличие технологического отверстия Н (Гл вид).
- 14 Остальные требования по 520 ТУ1.

1. Requirements for casting as per 172.TY6.
2. Drafts should not exceed 1:20.
3. Unspecified casting rounding-off radius 0-3 mm.
4. Accuracy class 9г-0-0-8 GOST 26645-85.
5. *Ensure dimensions by tool.
6. *1 Ensure surface finish by tool.
7. Check dimension 'E' (A-A) at extreme end holes.
8. On surface 'Ж' and 'И' (view upwards) traces of pushers upto 0±1mm are allowed.
9. Hardness and mechanical properties of alloy are as per condition Т5 GOST 1583-93.
11. Over length K (main view) presence of technological ribs with weight 3-2 mm and 2-1 mm is allowed. Number of ribs and their location is optional.
12. *2 Dimensions for reference.
13. Presence of technological hole H (main view) is allowed.
14. Other requirements are as per 520.TY1.

PILOT SAMPLE SHOULD BE APPROVED BY A H S P BEFORE BULK PRODUCTION.

EST. WT (kg) 0.87 TO BE STAMPED OR MARKED WHERE INDICATED THUS # (LETTERS)

ALL SHARP EDGES AND CORNERS TO BE REMOVED UNLESS OTHERWISE STATED MACHINED CORNERS TO HAVE R OUTSIDE R. INSIDE EQUIVALENT CHAMFERS ARE PERMISSIBLE

DRN	CHD	APFD	DATE	SCALE	DIMENSIONS IN mm	TOLERANCE ON DIMNS UNLESS OTHERWISE STATED IS: 2102-69	ALL THREADS TO CONFORM TO
			28-6-04	1:1			
MATERIAL:- ALUMINIUM ALLOY АК74 GOST 1583-93		USED ON:- 175.02.025 cb-1Cb		CONTROLLERATE OF QUALITY ASSURANCE (HEAVY VEHICLES) AVADI			
TITLE:- BRACKET						D S CAT NUMBER	
ISSUE						DATE	
NATURE OF AMENDMENTS						DRAWING NUMBER 172.02.903	

DRG. INDIANISED BASED ON RUSSIAN ORIGINAL ISSUE - NIL COMMON TO T-72 & BLT

356
SUPPLY CODE U-01-1-2
D80059
F-80 86
SIZE A3x3



COMPLETING ARTICLES SHOP (69)
Vendor Qualification Criteria (VQC)

NOMENCLATURE & DRAWING No. BRACKET to Drg. No. 172.02.903, LF No. 6201002030
 SUPPORT to Drg. No. 188.63.001, LF No. 6201063021

1	2	3	4	5	6
MANUFACTURING TECHNOLOGY & TESTING / INSPECTION FACILITIES REQUIRED TO PRODUCE THE ITEM		MUST BE POSSESSED BY THE VENDOR IN HIS OWN PREMISES - (P&M LIST & TESTING/INSPECTION EQUIPMENT LIST TO BE SUBMITTED)	PROVIDE DETAILS OF THE FACILITIES ASKED IN COLUMN (3) THAT ARE AVAILABLE IN-HOUSE (SELF-DECLARED P&M LIST (Nomenclature of machine, Make/Model, Capacity/Size & accuracy, Date of Installation, Vintage of Manufacturing of machine) AND TESTING/INSPECTION EQUIPMENT LIST (Nomenclature of the Testing/Inspection Equipment, Make/Model, Size & Range, Date of calibration) ALSO TO BE SUBMITTED)	MAY BE POSSESSED BY THE VENDOR IN HIS OWN PREMISES OR OUT SOURCED - (MOU/TIE-UP WITH THE OUTSOURCING VENDOR/SUB-VENDOR AND THEIR P&M LIST & TESTING/INSPECTION EQUIPMENT LIST TO BE SUBMITTED)	PROVIDE DETAILS OF THE FACILITIES ASKED IN COLUMN (5) THAT ARE AVAILABLE IN-HOUSE OR OUT-SOURCED FIRMS (NAME AND ADDRESS OF THE OUTSOURCING VENDOR TO BE DECLARED BY THE FIRM IN FIRM'S LETTERHEAD, SELF-DECLARED P&M LIST (Nomenclature of machine, Make/Model, Capacity/Size & accuracy, Date of Installation, Vintage of machine/Year of Manufacturing of machine) AND TESTING/INSPECTION EQUIPMENT LIST (Nomenclature of the Testing/Inspection Equipment, Make/Model, Size & Range, Date of calibration) AND MOU/TIE-UP ALSO TO BE SUBMITTED)
Technology 1	ALUMINUM ALLOY CASTING			172.02.903 188.63.001 Est. Wt: as per Casting drawing	
Technology 2	HEAT TREATMENT			Hardness to be maintain as per drawing.	
Technology 3	*MACHINING	CNC HMC/VMC Table size 720x275 mm min.			
Technology 4	SURFACE COATING	Enamel coating as per drawing.			
Test/Inspection 1	MEASURING INSTRUMENTS	Measuring Instruments required as per drawing.			

Test/ Inspection 2	TESTING MACHINE			Brinell Hardness Tester	
Test/ Inspection 3	MEASURING GEOMETRICAL ACCURACY			3D/CMM Table working area 720x275 mm min.	
Test/ Inspection 4	TESTING MACHINE			Radiographic/Ultrasonic testing, NABL accredited lab report as per drawing to be produced.	

Note: (1) Facilities must be available with vendors own premises - including facilities available with Sister / Parent Concerns / Strategic Partners shall be Considered for Capacity Verification subjected to documentary evidence to prove the relationship / ownership.

- (2) Requirements of Aluminium alloy should comply with Specifications 172 TY 6.
- (3) *The firm may indicate the alternate machines/process by which the component can be manufactured as per technological process/drawing.
- (4) Firm should give undertaking that they will develop the fixture facility if they get order.
- (5) For Machining refer Technological process book.


GNANASEKARAN M
DGM/CA&SMS


ANTARYAMI PRADHAN
JWM/QA(OE/CA)


LAKSHMINARAYANAN C
JWM/CA

**RESTRICTED
(DRAFT/PROVISIONAL)
QUALITY ASSURANCE PLAN**

**FOR
(BRACKET)**

DRG.NO. 172.02.903

(LF NO: 6201002030)

No.HVF/T-72C/QAP/02/BRACKET/241383-00

ISSUE No: 00

DATE: FEB – 2022

QUALITY ASSURANCE (RIG-SUB ASSEMBLY)

HEAVY VEHICLES FACTORY

AVADI CHENNAI – 600 054

QUALITY ASSURANCE PLAN (QAP)

FOR

BRACKET

172.02.903

PREPARED BY


(C.NANDAKUMAR)
JWM/QA (RIG-SA)

REVIEWED BY


(HANDUMANTH RAO GOLLA)
JWM/QA (RIG-SA/TA)

APPROVED BY


(SUBHAM BNLWAN)
AWM/QA-RIG-(SA)

ISSUED BY

QUALITY ASSURANCE (RIG- SUB ASSEMBLY)
HEAVY VEHICLES FACTORY
AVADI CHENNAI - 600 054

Sl. no	CONTENTS	PAGE .No.
1.	IMPORTANT NOTES	4
2.	INTRODUCTION	4
3.	AIM	4
4.	SCOPE	5
5.	DOCUMENTS	5
6.	ITEM USED ON	6
7.	LIST OF DRAWINGS	6
8.	BILL OF MATERIAL	6
9.	CONDITIONS OF USE/ STORAGE INSTRUCTIONS	6
10.	SAMPLING PLAN	7
11.	VISUAL INSPECTION	7
12.	DIMENSIONAL CHECKS	8
13.	MATERIAL CHECKS	8
14.	ACCEPTANCE / PERFORMANCE TESTS	10
15.	FITMENT AND PERFORMANCE TEST	10
16.	INTERCHANGEABILITY	11
17.	CALIBRATION CHECKS	11
18.	MARKING/IDENTIFICATION	11
19.	PRESERVATION CHECK	11
20.	PACKING CHECK	11
21.	DOCUMENTATION	12
22.	REFERENCE	12
23.	ANNEXURE - A	13
24.	FIGURE OF THE SAMPLE	14
25.	APPENDIX - A	15

1. IMPORTANT NOTE

Note-1

This is only a provisional and will be amended from time to time according to the requirement. No addition, deletion and reproduction will be done without permission of The Sr. General Manager, Heavy Vehicles Factory, Avadi, Chennai – 54.

Note –2

Any instruction contained in this does not prejudice the terms and conditions of the contract what so ever. In case of any contradiction between the contents of this QAP and the clause in the contract, the latter will prevail.

Note-3

The stores should be manufactured strictly only as per the drawings supplied by the Inspection Authority and not as per the samples, if any received by the manufacturer for guidance purpose.

Note-4

Any amendment issued by the Inspection Authority shall be incorporated in the QAP and the records for the amendments carried out should be maintained as per the Performa at Appendix-"A".

Note-5

In case of any contradiction between the contents of this QAP and drawings issued along with the contract, the latter will prevail.

2. INTRODUCTION

1. This quality plan lays down the inspection and testing procedure to be carried out on the component **BRACKET TO DRG NO. 172.02.903** being procured indigenously. This is prepared, based on the acceptance standards and inspection parameters laid down in collaborators documents and on the inspection test standards followed in respect of similar indigenous items.
2. This QAP is the property of Government of India and is liable for amendments as and when required. The Sr. General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054, is the inspecting Authority for this assembly. Any query / clarification on the content of this QAP shall be referred to this Factory. Any departure from these instructions is allowed only after written approval from the above authority. Notwithstanding the tests indicated in this QAP, the inspecting Officer has the right to carry out any test to check conformance to the paper particulars quoted in the Supply Order, which he may consider necessary to satisfy himself about the stores which he has to accept.

3. AIM

The QAP is aimed at standardizing the Inspection procedure and acceptance norm for **BRACKET TO DRG NO.172.02.903**.

It also aims at giving adequate information to the manufacturer on the quality requirements so that the required quality control methods are established. This is also meant to guide authorized Inspection Officer in his routine inspection and to set out main points to which his attention must be drawn to ensure that the accepted stores meet the stipulated standards.

4. SCOPE:

This QAP outlines in general terms, the checks and methods to be used during inspection of **BRACKET TO DRG NO. 172.02.903** including the technical requirements of the drawings. The recommended Quality Plan stipulated herein is mandatory and should be strictly adhered to.

For inspection purpose, only the latest issue of this QAP will be made applicable and copies of this QAP can be obtained from the issuing authority i.e. The Sr. General Manager, Heavy Vehicles Factory, Avadi, and Chennai.

Note:

- i. Tender enquiry (TE) and supply order (S.O) will be issued with QAP stating that inspection will be done as per QAP.
- ii. In case of TE, it is responsibility of the vendor to obtain the copy of QAP and give the statement of compliance that vendor will abide by the QAP in case supply order is placed.
- iii. In case of S.O, it is the responsible of the vendor to obtained copy of QAP and give the statement of compliance that the vendor will follow QAP. However, GM/HVF reserves the right to revise/update the QAP from time to time.

5. DOCUMENTS:

- a) On placement of firm supply order, One set of relevant specification and technical instructions on the subject item can be obtained by the contractor from AHSP through DDO/HVF
- b) Any clarification required on these documents should be obtained from the Inspecting Authority i.e. The Sr. General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054. Equivalent to the collaborators specifications and standards will be decided only by the Inspecting Authority and should not be unilaterally decided. For any change in the specifications, standards or written approval, any alterations in specification can be affected and not otherwise.
- c) The process instruction sheets supplied by the collaborators are available with the Authority Holding Sealed Particulars, i.e. The Controllerate of Quality Assurance (Heavy Vehicles), Avadi, Chennai for the reference. The relevant process sheets may be studied at the premises of the AHSP after obtaining necessary permission.
- d) The supplier after scrutiny of the concerned process sheets and connected paper particulars should establish the necessary production and inspection facilities. Particularly the inspection test rigs, stands, fixtures, template, gauges etc should be provided as recommended in these process sheets. If process

sheet / Process Book is not available the details particulars/parameters available in the drawings to be strictly adhered.

6. ITEM USED ON:

1. 175.02.025 cb-1cb -

7. LIST OF DRAWINGS:

Single (individual) Item

SI. NO.	DRG. NO	NOMENCLATURE	REMARKS
1	172.02.903	BRACKET	-

8. BILL OF MATERIALS:

Single (individual) items, details as below,

SI. NO	DRG. NO	NOMENCLATURE	MATERIAL SPECIFICATIONS	Qty
1	172.02.903	BRACKET	Aluminium Alloy AK74 GOST 1583-93	1

Note: Vendor/Contractor may use approved alternate material, if any specified in drawing/specification. * Also refer Para no: 13.

9. CONDITIONS OF USE/STORAGE INSTRUCTIONS

This assembly/item should be properly packed to protect from transit / handling damage and influence of atmospheric precipitations. In addition, the following parameters should be ensured:

- (a) The threaded parts if any should be covered with suitable plastic caps to prevent damages.
- (b) If the item consists of assemblies, each assembly should be packed separately.
- (c) The stores are to be suitably covered for preventing ingress of dust and Dirt/entry of sunlight / moisture.
- (d) The packaging slip shall contains
 - (i) Certificate of testing (NABL)
 - (ii) Guarantee/ Warranty Certificate
 - (iii) Service and maintenance instructions
 - (iv) Delivery Slip with Inspector's Acceptance Mark
- (e) The stores are not permitted to be stored together with oils, Petrol, acids, alkaline and other substances to avoid damage to the metal / rubber components.

10. SAMPLING PLAN:

Sl. No.	Sampling Plan	Pilot	Bulk
(i)	Visual Inspection	100%	100%
(ii)	Dimensional Inspection	100%	General Inspection level III, single sampling, Normal Inspection, AQL 2.5 of IS 2500 (Part-I)-2000
(iii)	Material Inspection	1 No	1 No. for each batch of raw material or heat treatment lot as required by specifications.
(iv)	Acceptance test	100%	100%
(v)	Pressure testing	-----	-----
(vi)	Machining / Fitment/ Performance trial on higher assembly / Tank	01 No.	01 No. per batch / As required.
(vii)	Interchangeability Test	02 Nos.	02 Nos. per batch on randomly basis, except selective assembly.
(viii)	Test stand/Jigs/ Fixtures/Gauges/Ma ndrels/etc.	100%	100%
(ix)	Marking/Identification	100%	100%
(x)	Packing/ Preservation	100%	100%

Note:-

A New (First time supplier of this item) supplier should obtain clearance from HVF for bulk production which will be issued only after inspection/evaluation of pilot samples by HVF.

During acceptance of castings, the following are to be checked as per Specification: (For details refer Specification 172 TY 6 & GOST 1583-93).

1. Chemical composition of steel;
2. Mechanical properties of steel;
3. External view (absence of defects) and quality welding of casting defects;
4. Dimensions;
5. Hardness;
6. Absence of internal defects;
7. Microstructure/Macrostructure.

11. VISUAL INSPECTION [Sampling plan as per Para- 10 (i)]

The stores are to be visually examined on 100 % of pilot /bulk and same should be free from any defects and all the finishing requirements shall satisfy as indicated in technical conditions of the assembly / component drawing.

The components shall be checked for the following and should be free from the defects:

- Defects in construction
- Cracks/Flaws/blowholes/shrinkage/porosities
- Fitment of all components
- Presence of foreign particles
- Moisture and dust
- Corrosion of metal parts
- Mechanical imperfections & distortion
- Any form of deterioration of material and finishing.

Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

12. DIMENSIONAL CHECK[Sampling plan as per Para- 10(ii)]

The dimensions of individual component, sub assembly and major assembly shall be checked and ensured as per respective drawing. Dimensional check should be carried out as per sampling plan. *However, the inspecting authority/rep. may at his discretion, tighten the inspection level and acceptance quality level on the critical items and adopt check point during manufacture.

12.1 BRACKET TO DRG.NO: 172.02.903

1. All dimensions shall be confirmed as per drawing/specification
2. Surface finish/Roughness should be confirmed as per drawing and specification.
3. For admissible alternate method for manufacture in dimensions/material if any, refer drawing/specification.

13) MATERIAL CHECKS [SAMPLING PLAN AS PARA – 10 (iii)]

Material specimen /test bars of the components shall be in conformity as per the material mentioned in the relevant documents/drawing. The material check will be carried out as per sampling plan. *However, if the manufacturer proposes any alternative material at the stage of tender enquiry, the same has to be approved and a written concurrence should be obtained from AHSP through DDO/HVF, before usage of such materials.

For each heat code/batch the test bars/test samples as specified in GOST/specification is to be submitted for testing chemical, mechanical, physical properties and other parameters of the casting and also the test certificates for the same tested by the supplier is to be submitted.

13.1 BRACKET TO 172.02.903.

- a) The component should be manufactured from ALUMINIUM ALLOY AK74 GOST 1583-93.

b) **Chemical properties:** As per ALUMINIUM ALLOY AK7₄ GOST 1583-93.

CONTENT OF ELEMENTS %									
BASIC ELEMENTS									
Al	Mg	Si	Mn	Cu	Ni	Ti	Be	Zr	OTHER ELEMENTS
BASE	0.2-0.4	6.0-8.0	-	-	-	-	-	-	-

Content of Elements %					
A mixtures not more than					
Mn	Cu	Zn	Sn	Pb	Ni
0.50	0.20	0.30	0.01	0.05	0.15 (Titanium + Zirconium)

Note: For mass fraction of other elements refer GOST 1583-93

c) **Mechanical properties:** ALUMINIUM ALLOY AK7₄ GOST 1583-93.

The castings should be subjected to heat treatment. The mode of heat treatment for obtaining the given mechanical properties or the removal of internal stresses should be set by the manufacturing plant.

After final heat treatment, the mechanical properties of steel should comply with standards specified in table below

GRADE OF ALLOY	CASTING PROCESS	TYPE OF HEAT TREATMENT	ULTIMATE TENSILE STRENGTH, MPa (kgf/mm ²)	RELATIVE ELONGATION IN %	HARDNESS IN BRINELL HB
AK7 ₄	Refer GOST 1583-93	T5	Refer GOST 1583-93	2.0	60.0

Note: For details of other parameter refer Specification GOST 1583-93.

14) PERFORMANCES/ACCEPTANCE TEST: BRACKET to Dwg. No. 172.02.903.

The technical requirements shall be confirmed for acceptance of the component as specified in Specification and Drawing.

1. Requirements for casting as per 172.TY6.
2. Drafts should not exceed 1:20.
3. Unspecified casting rounding-off radius 0^{+3} mm.
4. Accuracy class 9r-0-0-8 GOST 26645-85.
5. *Ensure dimensions by tool.
6. *1 Ensure surface finish by tool.
7. Check dimension 'E' (A-A) at extreme end holes.
8. On surface 'X' and M (view upwards) traces of pushers upto 0 ± 1 mm are allowed.
9. Hardness and mechanical properties of alloy are as per condition T5 GOST 1583-93.
11. Over length K(main view) presence of technological ribs with weight 3^{+2} mm and 2^{+1} mm is allowed. Number of ribs and their location is optional.
12. *2 Dimensions for reference.
13. Presence of technological hole H(main view) is allowed.
14. Other requirements are as per S20.TY1.

Note:

The Casting Manufacturers are required to follow the instructions strictly so far as supply of castings (Refer Specification 172 TY 6 & GOST 1583-93)

Explanatory Note

1. Stage wise inspection and process of the component as specified in TD Book / Process Book / illustration book is to be confirmed by the supplier during manufacturing the components.
2. Firm shall submit the inspection process details/reports to HVF.
3. If required/applicable HVF shall witness/verify stage wise inspection/process details during manufacturing of the components.
4. The component may be subject to endurance test, when fitted in higher assembly as specified in process/ illustration/ TD book.
5. Firm has to submit all the test reports for the parameters specified at para14(1) for acceptance of the components.

15) FITMENT / MACHINING AND PERFORMANCE TEST:

- a. Pilot samples should be checked for fitment/machining trials and Performance test to ascertain the efficacy of the system under different operating conditions by fitting in higher assembly and repeating it for functional checks, wherever required.
- b. The item should possess appropriate material for machining as indicated in the drawing and should be supplied in such a way that the components to suit in machine/fixtures/Jigs etc to carry out machining.

- c. The component should be free from any defects after machining in trial and the casting should be in line with the parameters as specified in the GOST and Specification.
- d. The casting shall be clean, free from porosity blowholes, hard spots, Cold shut, distortion, cracks and other harmful defects as per the specification.
- e. The casting shall be well dressed and fettled and shall be readily machinable.
- f. Casting shall be cleaned / shot blasted and preservation coating is to be done after heat treatment as called for in the specification.
- g. No weld/repair should be carried out without prior permission from HVF.
- h. Testing methods for acceptance of the casting refer Specification 172 TY 6 & GOST 1583-93.

16) INTERCHANGEABILITY:

The assemblies/component should be interchangeable component wise and assembly wise, except the Component are to be supplied as a set and to be assembled selectively as per sampling plan.

17) CALIBRATION CHECKS (TEST STANDS/JIGS/FIXTUERS/GAUGES/INSTRUMENTS):

The supplier / Contractor should have suitable Instruments, Test Stand, jigs, fixture, mandrels, templates and gauges to carry out quality checks, to ensure conformance of components/assembly as per drawing and Specification /T.R points.

The supplier/contractor should submit calibration reports/certificates for instruments/fixtures/gauges/mandrels etc., which are used during process of inspection activities.

18) MARKING/IDENTIFICATION

Marking of the items is to be carried out as called for in the relevant drawing, drawing/T.R points.

Inscription if any on the components is to be carried out as called for in the drawing/T.R points. Unless otherwise specified in the drawing/ specification, marking should not be carried out over the components.

For traceability, marking of part No., Manufacturer name, supply order No, Serial No/Qty, batch No. and manufacture date & year are to be carried out. Suitable method can be adopted, provided that the above parameters are legible and considering the parameters mentioned in the drawing and specification.

19) PRESERVATION CHECK

- a) Preservative coatings are to be strictly adhered to as called for in the drawing. However, equivalent BIS Standards can also be followed, subject to the

thickness of the coating/preservative is maintained as per the drawing/specification.

- b) Other preservations as necessary to prevent damages due to moisture and dust during process, storage and transit are to be carried out. Conventional Methods can also be resorted to.

20) PACKING CHECK

Components / Assemblies are to be packed separately to avoid damages during transit / handling of the same. Part No. and No. of sets are to be marked on the packing.

Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

Finished products shall be wrapped / packed using black and opaque polyethylene sheet or bags.

21) DOCUMENTATION

- i. Firm has to maintain all the documents as per QAP with respect to the SI.No.to have traceability.
- ii. Vendor has to submit Bill of materials, Material test reports, Class 'C' /Endurance test reports (wherever specified in drawing/TY specification/QAP) and Complete PIR (pre-inspection report)at the time of offering the item for inspection. HVF will commence inspection only after scrutiny of these documents.
- iii. The testing/inspection responsibility to test all the parameters as per QAP and drawing specifications as mentioned in Annexure -A (enclosed).
- iv. Pre inspection reports (PIR) of firm like, 1. Chemical analysis, 2.Mechanical properties, 3. Pre-forming process, 4. Coating certification (wherever applicable), 5. Calibration reports of instruments and 6. 100% Dimensional inspection reports. 7. Pressure test (leakage test) if applicable, 8. Hardness checks, 9. Certificates for Macro/micro structure (wherever applicable), 10. Fracture test (if applicable) and other relevant test reports for acceptance of the Casting, etc.

22) REFERENCE:

- a) Drawing No: 172.02.903
- b) Material specification as per drawing:
ALUMINIUM ALLOY AK7, GOST 1583-93.
- c) GOST 1583-93, GOST 26645-85.
- d) Specification: 172 TY 6 & 520 TY1.

ANNEXURE-A

Sl. NO.	CATEGORY	ASSEMBLY/ SUB ASSEMBLY	TESTS/ INSPECTION PARAMETERS	STANDARDS TO BE REFERRED	ACCEPTANCE CRITERIA	INSPECTION RESPONSIBILITY			REMARKS
						Firm	HVF	DGQA	
1	BRACKET TO DRG. NO 172.02.903	Pre inspection reports (PIR) of firm	Firm has to produce all the document as per QAP	As per the relevant drawing and QAP.	Confirm to drawing and QAP as per bill of material	P	V	R	100% by firm/ vendor.
2		Bill of material (BOM)	Firm has to prepare the BOM as per QAP	Refer QAP Para no: 8 or item list.	Confirm to QAP	P	V	R	100% by firm/ vendor.
3		Material tests	Chemical composition & Mechanical / Physical Properties	As per GOST 1583-93 & 172 TY 6	All the values to confirm with QAP (Para no:13.1(a) (b), (c))	P	W/V	R	SP followed by HVF.
4		Dimensional checks	Dimensions as per the drawing	Refer drawing/ QAP Para no: 12.1	Confirm to drawing and QAP	P	W/P	R	100% by firm/ vendor. SP followed by HVF.
5		Machining Trial	Suitability of component for machining	Refer QAP Para no:10 (v) & Para 15	Confirm to QAP Para no: 10 (v) & Para 15	-	P	R	SP followed by HVF
6		Hardness Checks	Hardness	As per Para 14 (9)	All the values to confirm with QAP	P	W/V	R	SP followed by HVF
7		Marking / traceability	Marking / traceability	Refer QAP Para no: 18	Confirm to QAP Para no:18	P	V	R	100% by firm/ vendor. SP followed by HVF.
8		Preservation & packing	Preservation & packing	Refer QAP Para no 19 & 20	Confirm to QAP Para no 19 & 20	P	V	R	100% by firm/ vendor.

Note: For conformity of the items (Chemical/Physical/Mechanical properties).

1. One sample per heat / batch shall be tested under NABL Lab/Govt. Approved lab by firm. In case of non-compliance to standards entire lot shall be rejected or not to use in production further.
2. For cross conformation of material, manufacturer has to submit sufficient quantity (as specified in GOST/Specification/supply order) test sample pieces for the items used / test slab and burton for rubber items / HVF will draw samples from supplied lot for Witnessing (WV) at HVF premises. In case of non-compliance to standards entire lot will be rejected.

P- Perform W- Witness V-Verify R-Review SP-Sampling Plan

