
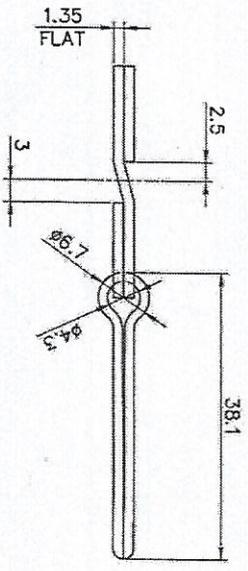


FOR ATTENTION: THE DRAWING IS THE PROPERTY OF THE INDIAN ARMY AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF THE DIR GEN. OF NAVAL ARMAMENT INSPECTION.

CROSS SECTION AT A-A

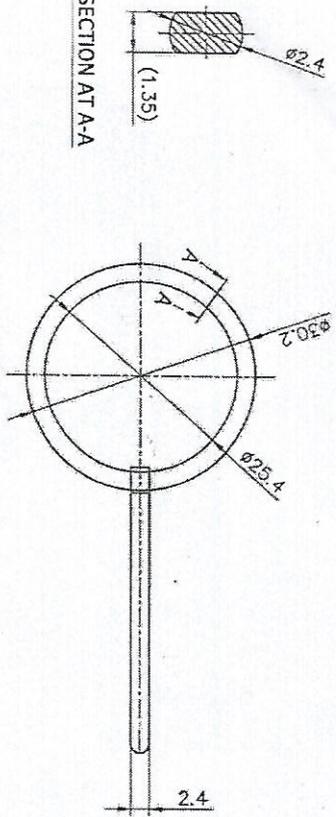

MATL & MATERIAL SPECN:-
FOR PIN


STEEL TO STA 5 V1A OR V2 OR IS:1570(PART-3), 11C10S25
OR 10C4 OR BS:970 (PART-1), 220M07 OR 055M15

FOR RING
STEEL TO STA 3 OR 4 OR IS:4454, SL
OR BS:1408, 1408-C

PROTECTIVE FINISH:
PASSIVATED ZINC PLATED TO IS:1573

| | | | | | |
|--------|---------|------|--------|---------|------|
| Author | Revised | Date | Author | Revised | Date |
| 1 | 2 | | 1 | 2 | |

Enclosure to NAI (Kampur)
Letter KNI/PASL Dt. 04 May 18

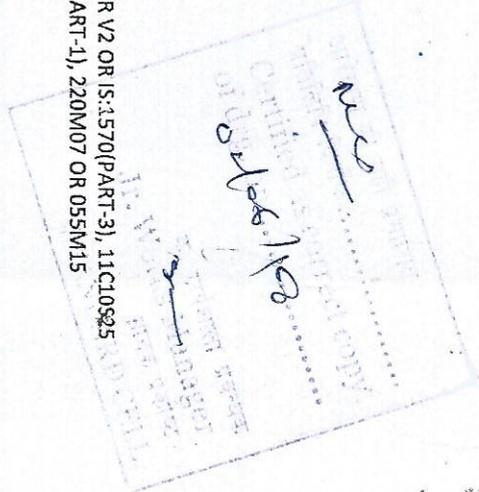

| Item No | Part | Description | Store Ref | Dimension in MM | Gen Spec | Gen Tol |
|---------|----------|-------------|-----------|-----------------|----------|----------|
| 1 | SEE DRG. | SEE DRG. | | | A31B | ± 0.20mm |
| 2 | NAD 7606 | SEE DRG. | | | | |

PIN, SAFETY
(ALTERNATIVE DESIGN)

NAD 7606/1A

BASED ON: STRIKER MECHANISM, N8 MK1

Encl. to IHB/DGPI letter
No. 13674 dt. 05000 18