


- 1- $\varnothing 101$ H OST 3 1901-85
- 2- SILICATE - SILVER ELECTRODES WITH THICKNESS 0.01 --- 0.03 MM SHOULD BE APPLIED ON CURRENT CARRYING COATING ALONG THE WHOLE LENGTH.
- 3- RESISTANCE OF CURRENT CARRYING COATING SHOULD ENSURE THE REQUIREMENT OF DRG. AU 4-496-007 CE.
- 4- REST TECHNICAL REQUIREMENT AS PER TY 3-3-834-78
- 5- TIES (MCT/1657) SHOULD BE FIXED WITH CURRENT CARRYING GLUE GOST 12172-74 NICKED POWDER 17 HK-074 GOST 9722-79.

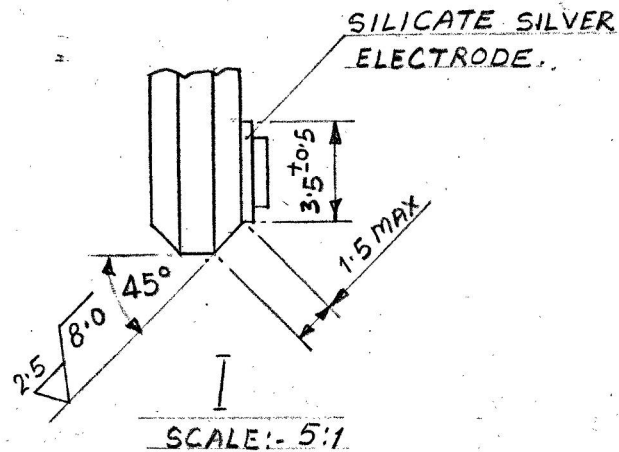

आयुध निर्माणी ORDNANCE FACTORY देहरादून DEHRADUN	आदेश 20/10/80	GLASS SAFETY ELECTRICAL HEATER, SE, 15. PLATE HEATING		ड्रॉ. 174-99	स्केल 1:1
	अनुमोदित APPROVED			DRG. NO AUG-439-004 CE. (ASSY. DRAWING)	धातु/सामग्री MATL SEE DETAIL
	अनुमोदित APPROVED	अनुमोदित APPROVED	अनुमोदित APPROVED	प्रतियाँ SHEETS 1	प्रतियाँ SHEETS 1
	अनुमोदित APPROVED	अनुमोदित APPROVED	अनुमोदित APPROVED	AMENDMENTS OFD/D.O./002	DRG. NO MCT-1656