
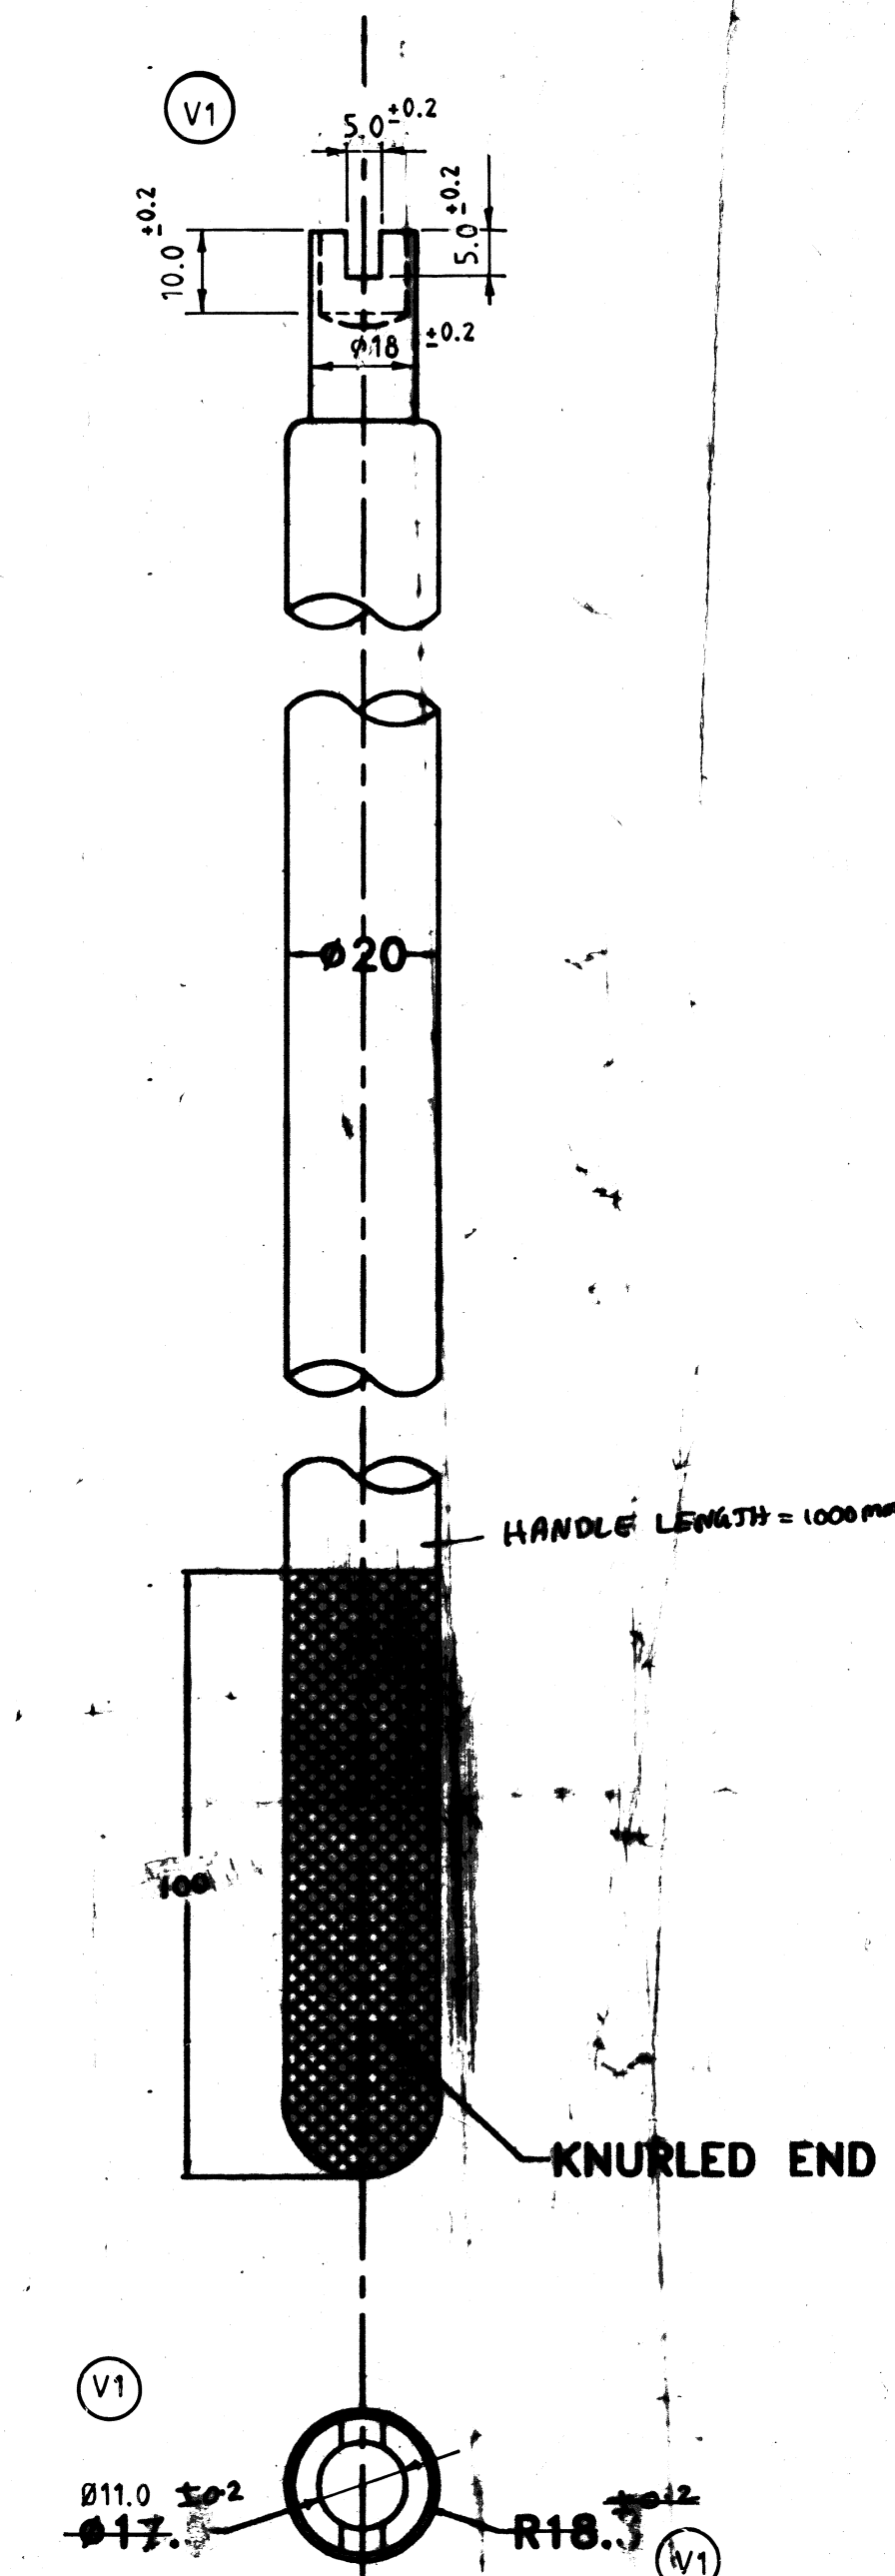
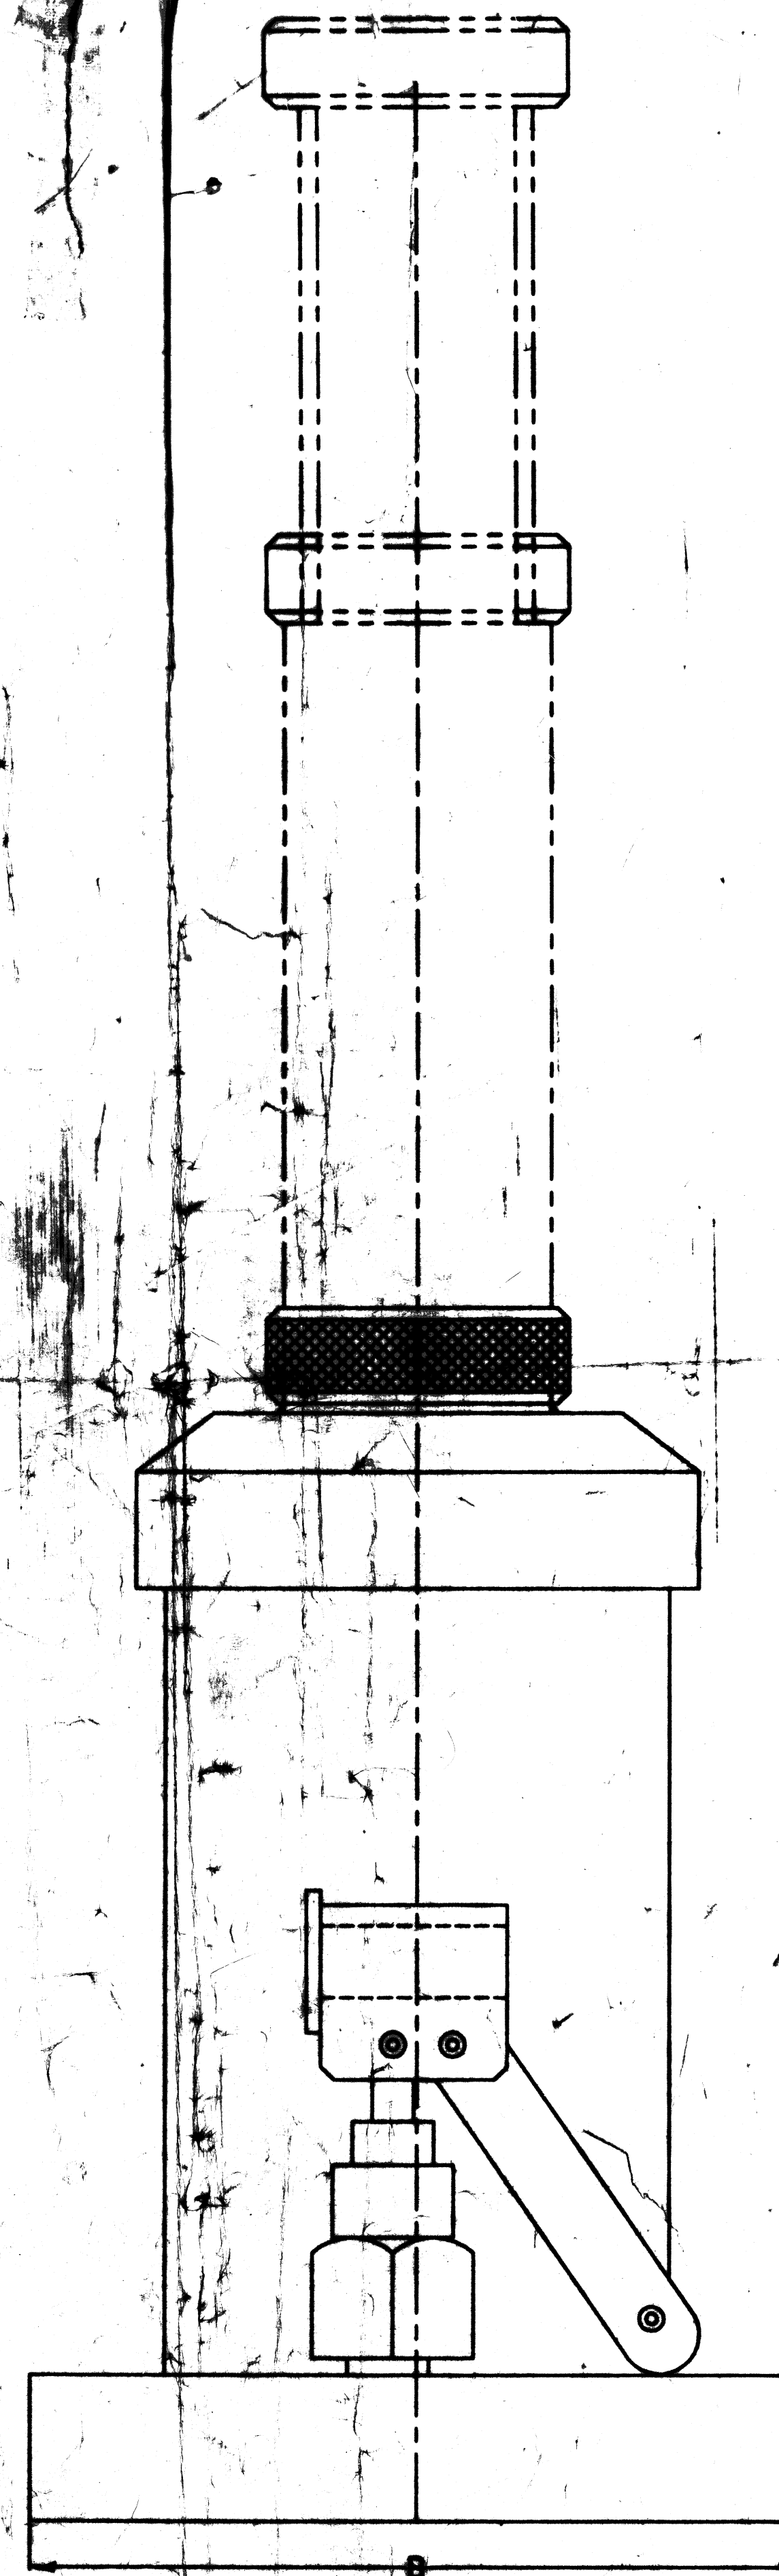


| FIRST ANGLE PROJECTION |       |
|------------------------|-------|
| VIEW                   | ANGLE |
| FRONT                  | 0°    |
| TOP                    | 90°   |
| LEFT SIDE              | 180°  |
| RIGHT SIDE             | 270°  |
| ISOMETRIC              | 30°   |

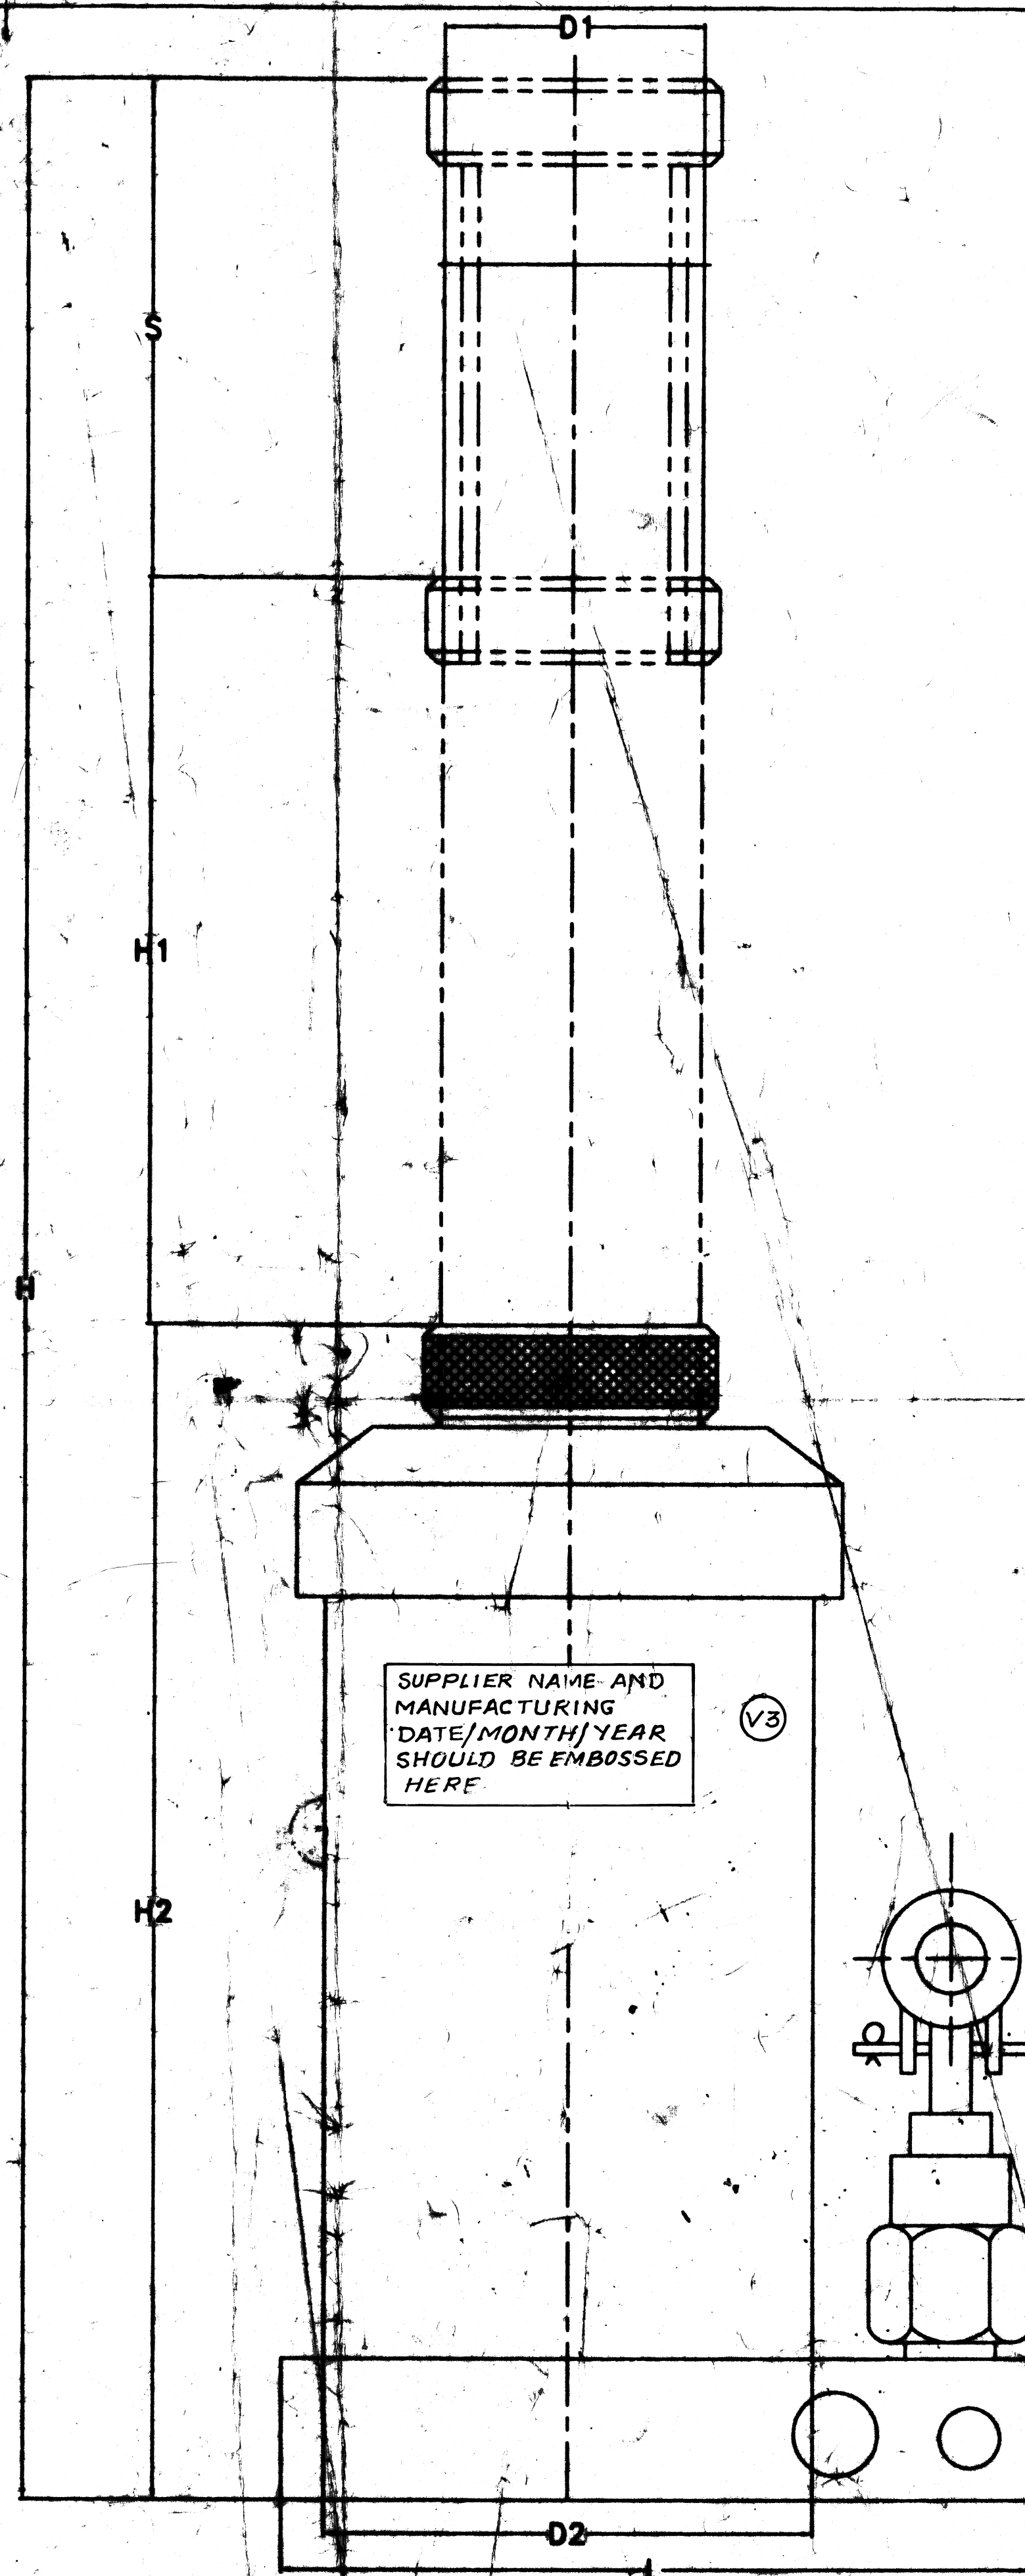

| CAPACITY      |    |
|---------------|----|
| RAM DIA       | D1 |
| BODY DIA      | D2 |
| TOTAL EXT. HT | H1 |
| HYD. LIFT     | H2 |
| CLOSED HT     | H3 |
| BASE LENGTH   | L  |
| BASE WIDTH    | B  |
| SCREW EXT.    | S  |

TONNES

BT JACK To IS 4552-1993. DESIGNATION: H1B1-15013

- ANY SPL INSTRUCTION OR SUPPLIER RECOMMENDATION TO BE PROVIDED
- REFER DETAIL AND ALL PT NO TO BE PROVIDED
- HYDRAULIC RAM TO LIFT 25mm IN MAXIS OF PLUNGER.

| STAGE |     |
|-------|-----|
| 1     | 2   |
| 3     | 4   |
| 5     | 6   |
| 7     | 8   |
| 9     | 10  |
| 11    | 12  |
| 13    | 14  |
| 15    | 16  |
| 17    | 18  |
| 19    | 20  |
| 21    | 22  |
| 23    | 24  |
| 25    | 26  |
| 27    | 28  |
| 29    | 30  |
| 31    | 32  |
| 33    | 34  |
| 35    | 36  |
| 37    | 38  |
| 39    | 40  |
| 41    | 42  |
| 43    | 44  |
| 45    | 46  |
| 47    | 48  |
| 49    | 50  |
| 51    | 52  |
| 53    | 54  |
| 55    | 56  |
| 57    | 58  |
| 59    | 60  |
| 61    | 62  |
| 63    | 64  |
| 65    | 66  |
| 67    | 68  |
| 69    | 70  |
| 71    | 72  |
| 73    | 74  |
| 75    | 76  |
| 77    | 78  |
| 79    | 80  |
| 81    | 82  |
| 83    | 84  |
| 85    | 86  |
| 87    | 88  |
| 89    | 90  |
| 91    | 92  |
| 93    | 94  |
| 95    | 96  |
| 97    | 98  |
| 99    | 100 |

VFJ

PART NO. K7451300

ALTERATIONS

- 1) DIM. 110 WAS 170 & Ø18<sup>±0.2</sup> ADDED. R18<sup>±0.2</sup> DELETED.
- 2) DIMS 10<sup>±0.2</sup> ADDED.
- 3) SLOT WIDTH 5<sup>±0.2</sup> & DEPTH 5<sup>±0.2</sup> ADDED

CH. NO. 50321 DATE-03-03-03 (V3)  
MANUFACTURERS NAME AND  
MFG. DATE/MONTH/YEAR  
TO BE EMBOSSED ADDED.

CH. NOTED-50309 DATE-04.08.2004 (V2)

NOTE:- APPLICABILITY OF THIS DR. NO.  
- X7451300 ALSO EXTENDED FOR  
LPTA 2.5 TON VEHICLES.

| STAGE |     |
|-------|-----|
| 1     | 2   |
| 3     | 4   |
| 5     | 6   |
| 7     | 8   |
| 9     | 10  |
| 11    | 12  |
| 13    | 14  |
| 15    | 16  |
| 17    | 18  |
| 19    | 20  |
| 21    | 22  |
| 23    | 24  |
| 25    | 26  |
| 27    | 28  |
| 29    | 30  |
| 31    | 32  |
| 33    | 34  |
| 35    | 36  |
| 37    | 38  |
| 39    | 40  |
| 41    | 42  |
| 43    | 44  |
| 45    | 46  |
| 47    | 48  |
| 49    | 50  |
| 51    | 52  |
| 53    | 54  |
| 55    | 56  |
| 57    | 58  |
| 59    | 60  |
| 61    | 62  |
| 63    | 64  |
| 65    | 66  |
| 67    | 68  |
| 69    | 70  |
| 71    | 72  |
| 73    | 74  |
| 75    | 76  |
| 77    | 78  |
| 79    | 80  |
| 81    | 82  |
| 83    | 84  |
| 85    | 86  |
| 87    | 88  |
| 89    | 90  |
| 91    | 92  |
| 93    | 94  |
| 95    | 96  |
| 97    | 98  |
| 99    | 100 |

V2) APPLICABILITY STALLION 4x4 AND  
LPTA 2.5 TON VEHICLES

STALLION 4x4

HYDRAULIC JACK

PART NO. K7451300

APPLICABLE TO STLN MK III