

052200-0215 ON

DRAWING CONVENTIONS CONFORM TO JSG-0104


D.S.CAT DIMNS. ARE IN mm. GEN. TOL. 'MEDIUM' IS: 2102

MARKING (SUITABLY) ON SAMPLE / TAG

Yr. OF Mfg.

MANUFACTURER'S CODE

D.S.CAT. NO.

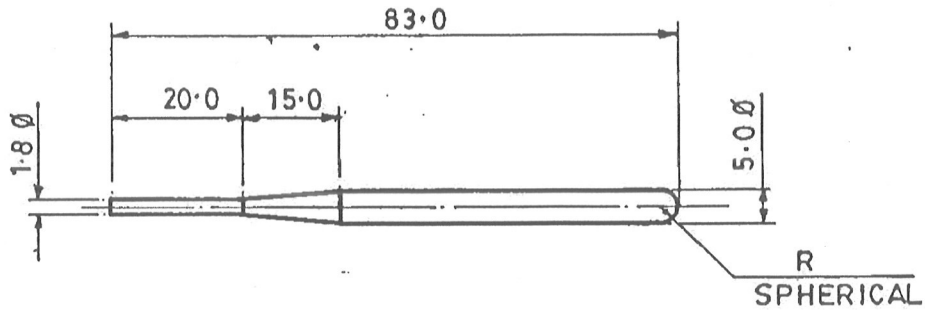

NSN: B2/5120-72-0002750

C	01.09.16	26925-SA	MATERIAL AMENDED.				
	08.05.10	26501-SA	NSN ADDED				
	17-7-97	23871-SA	PROFORMA CHANGED, NOTE DELETED, MARKING NOTE ADDED, NEG. RE-TRACED AND DRG. PROV. RE-SEALED.				
			PREVIOUS DC. NO. 23784-SA.				COPY
	DATE	AUTHY.	BRIEF RECORD	ZONE	I/C;D.O.	G.O.	SIGN.
	SEALED:- PROV. DC. NO. 23784-SA, DT. 27.3.97						
	DRN.	CHD.	TRD. <i>shelwa</i>	COMP. <i>Abanbi</i>	AHSP CQA(SA), ICHAPUR		
	SCALE :- 1:1		EST. MASS		ASSY.		
	DT. 17-7-97	<i>Anes</i> I/C;D.O.	APPROVED DT. 20.4.90 NEG. RE-TRACED				
D	MATERIAL :- IS: 5517-1993, DESIGNATION 55 CB.						
	H.T./HARDNESS :- 425-475 HV.				DGNER'S REF. ARDE/TA/94/13		
	PROTECTIVE PHOSPHATED TO SPECN. JSS:0465-01:1988				PART NO.		
	FINISH :- CLASS II (ACCELERATED), OIL FINISH.				DRG. NO.		
	NOMENCLATURE :- DRIFT PIN				D.S. CAT. NO. 5120-007750		