
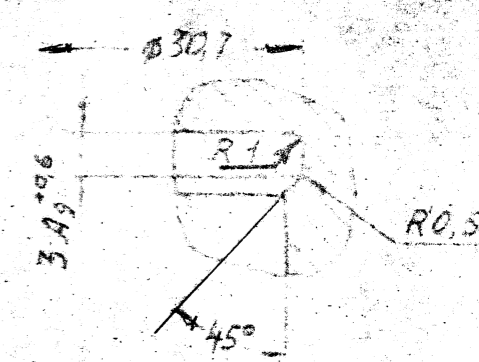
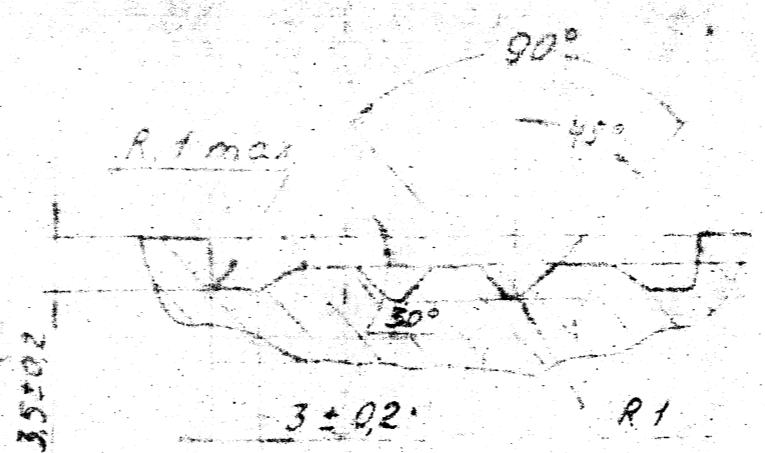


USED ON  
765-58-05 202

675-58-05 137 11


73 Unless otherwise specified

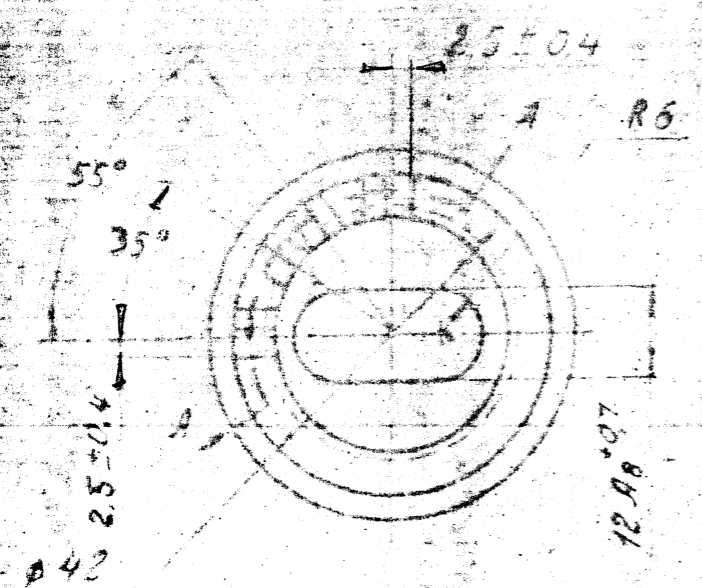

EQ. MATERIAL: - GRADE 42 Cr. M02 TO I: 5517-93.

- Blunt sharp edges
- Perform dimensions without deviations as per accuracy class 7, OST 1010.
- Angular displacement of slots  $\Gamma$  from true position should be  $1^\circ$  max.
- Perform heat treatment HB 302 to 255 (HRC 3.5 to 3.8).
- Alternate material is 25xC and 38xC GOST 4543-71
- Coating: Zinc-plated, 9 microns thick, <sup>chromatized</sup> oiled. Remove hydrogen embrittlement. Check dimensions before coating. Protect external surfaces marked by --- on section E. Coating may be absent on grooving surfaces.

196  
58

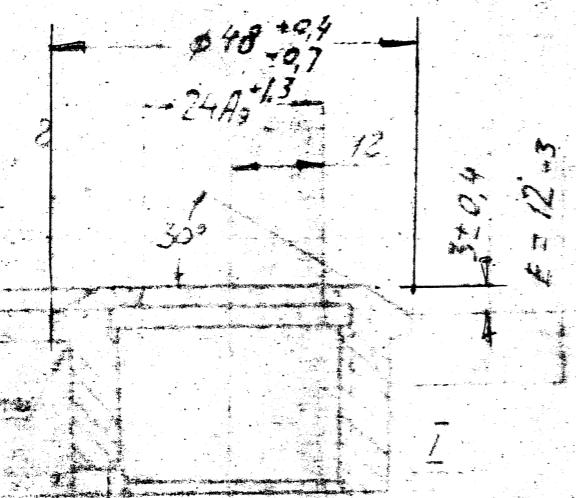

00849-ICV	(A)	ED. MATERIAL ADDED
16-01-2901	ISSUE	AMENDMENTS
DCI/No.d		

PROVISIONALLY SEALED.

ARMY VERSION

1.6 x 46°  
M30x1.5-6H, Left

PROPRIETARY  
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO ORDNANCE FACTORY, MEDAK (OFMK). ANY USE, REPRINTING, ASSIGNMENT OR DISCLOSURE IN WHOLE OR IN PART IS SUBJECT TO THE PRIOR WRITTEN CONSENT OF THE GENERAL MANAGER, ORDNANCE FACTORY, MEDAK.  
 DATE: \_\_\_\_\_ D.O./HGS

SKETCH

765-58-312

BUSHING

PART WEIGHTS	
11065	
107	