


66-50-520

USED ON

675-05-97 2

40 40

2 holes  $\phi 16$

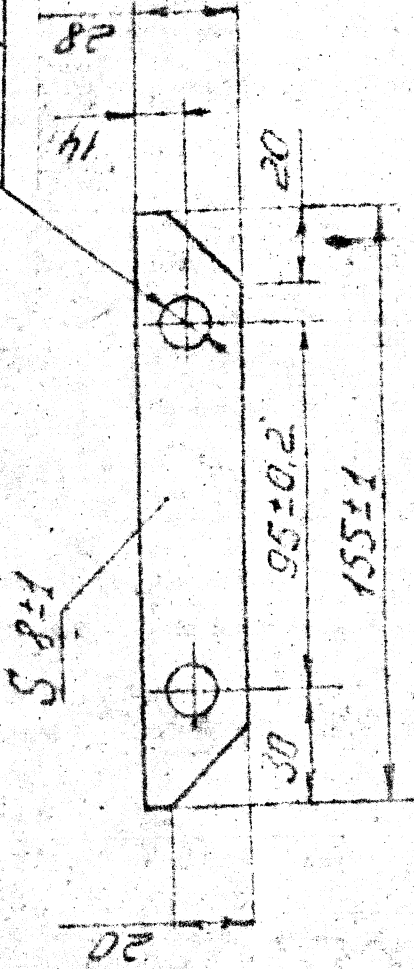

PROVISIONALLY  
SEALED.

ARMY VERSION

1. Unspecified limit deviations of sizes are  $\pm 0.5$  mm.
2. Other requirements are according to TY 005 216 for article of code 254311

2 holes,  $\phi 16$

PROPERTY OF THE ARMY  
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO ORDNANCE FACTORY, MEDAK (OPNKA) ANY USE, REPRINTING, ASSIGNMENT OR DISCLOSURE IN WHOLE OR IN PART IS SUBJECT TO THE PRIOR WRITTEN CONSENT OF THE GENERAL MANAGER, ORDNANCE FACTORY, MEDAK  
 U O/H/5

146/85

PLEASE SEE OVERLEAF

SKETCH 675-05-97

GASKET

|        |       |     |
|--------|-------|-----|
| WEIGHT | 0.049 | 1:2 |
| SHT    | 515   |     |

PLATE 254-311 Ty 005216-75  
 RUBBER 632