DRG.NO. 29P 0020*

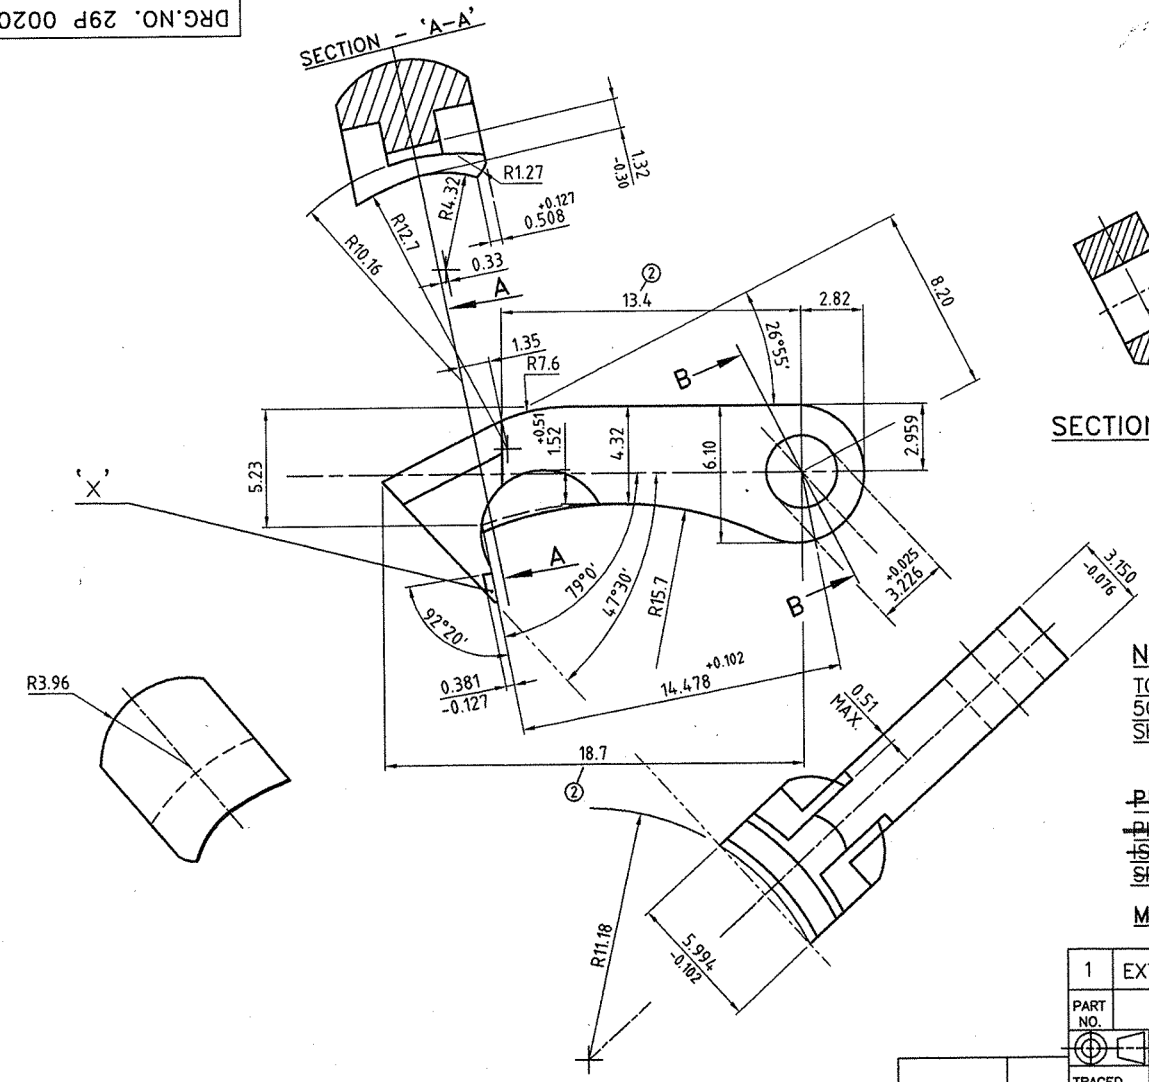



SECTION – 'B–B'

NOTE:–

TO BE HARDENED AND TEMPERED TO GIVE A HV 500–550 AT 'X' (48 – 51 HRC.) POSITION OF 'X' SHOWN.

~~PROTECTIVE FINISH:~~

~~PHOSPHATE TO SPECN.WPN/GEN-3(LATEST ISSUE)CLASS 1 PAINT P.F.U. STOVING BLACK TO SPECN. CS 2383.~~

MATL:– BS 970 PT.5:1972 GDE 070 A 72 OR 070 A78

PART NO.	DESCRIPTIONS	NO OFF	MATERIAL	TREATMENT	REMARKS
1	EXTRACTOR	1	AS ABOVE		

AMENDMENTS	SIG. & DATE
8996/14/DDO/01 29.5.09	
②8996/14/DDO/39 DT.03-5-06.	-Sd-
①8996/14/DDO/16 DT.07-10-05	

	SIGNATURE & DATE.
TRACED	
DRAWN	3/5
CHECKED	
OIC/D&DO	
OFFICER/ PRODN.	
OFFICER/ D&DO	
APPROVED ON.	–5–2006.

SUB: EXTRACTOR

FOR:

OF: 0.315" SPORTING RIFLE

DES.REF.NO.

DRG. No.: 29P 0020*

ORDNANCE FACTORY TIRUCHIRAPPALLI–16.

SCALE	5:1
STORE DRG.NO.	29P 0020
OPERATION NO.	---
SHEETS:	1
SHEET No.:	1

DIMENSIONS ARE IN mm.
UNTOLERATED DIMNS. AS PER IS : 2102 (MED)
MARK DRAWING No.

DRG.IN CAD.5 \C:\GOWRI OFFICE