


Ritningsändring

- G H J K L

Produktförändring

F - - - - -

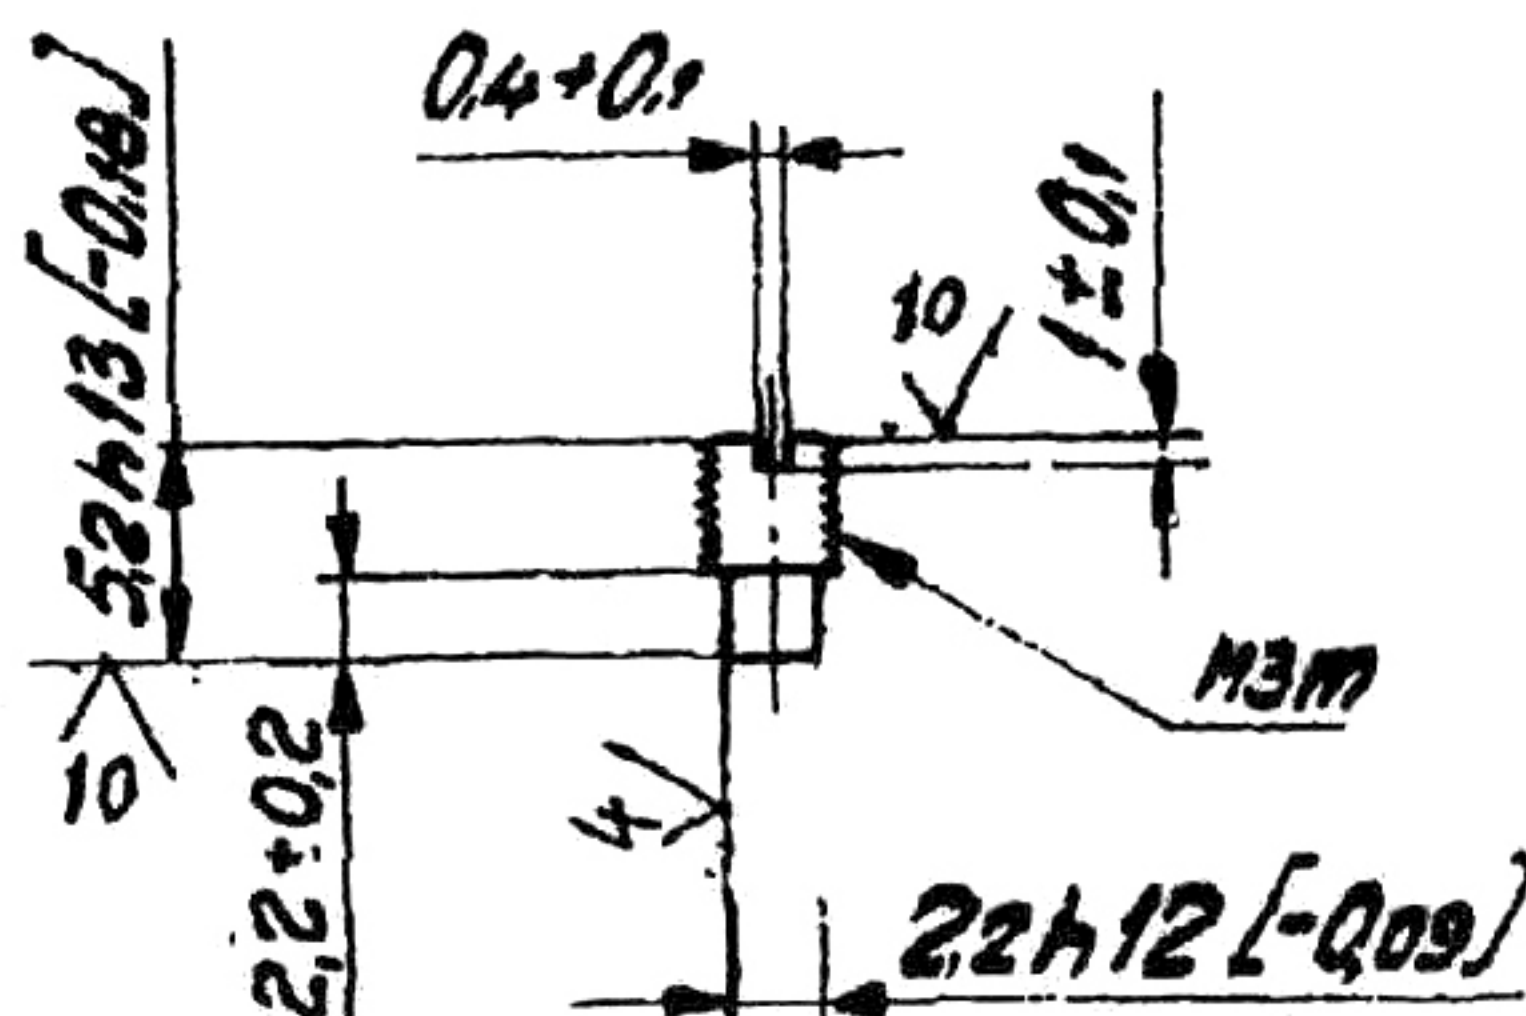

Scale 1:1

ANTAL PRODUKT.

1

MATERIALKVALITE:

Steel SS 1914 alt. EN 10087 - 1.0721

VÄRMEBEHANDLING

Hardened: Surface hardness min 700HV1; Hardness depth DC max 0,2

YTBEKÄFFENHET

all over except where stated

YTBEHANDLING:

Alkaline blackened and oiled to GF 1.003.063

GRADNING ENL FFV 66

TEKN. BESTÄMMELSER

See above

INDIG MATL :- IS:4431-1978 GRADE 11C10S25 (HOT ROLLED)

24-2-12	19243-W	DRG.SEALED		MR
27-5-11	3B2438/ CQAW/007/3	DOMESTIC PART No ADDED		MR
09-05-11	3B2438/ CQAW/007/3	INDIG MATL ADDED		MR
		SCANNED & PRINTED WITHOUT CHANGE		
DATE	AUTHORITY	AMENDMENTS	SIG AHSP	SIG DO

PREV DC :-

DRG SEALED :- 19243-W
DT 24-2-12

SCANNED PKA

CHECKED :- GSN

HOS :-

C Q A (W), JABALPUR

Ritad SL	Gransk. KL	Kop OL	Godk. L/S	Konstr.	Vyplaceringsmetod europaisk	Skala 2:1
Datum 1.11.49	Stand gr	Kop gr GEC	Datum	Ersätter		
PRODUKT 84 mm RCL M2						
NAMN Firing pin guide						
FÖRSVARETS FABRIKSVERK.					IRCL 529	
CARL GUSTAFS STADS GEVÄRSFAKTORI					(GF125010)	