


DIMENSIONS ARE IN mm. ✓  
 UNTOLERATED DIMNS. AS PER IS : 2102 (MED)  
 MARK DRAWING No.

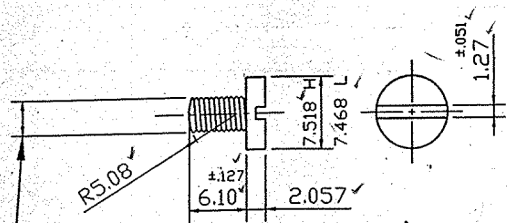

**M3.5 X .6 PITCH, R.H.** ✓

NOTE :-

THE HEAD OF THE SCREW TO BE TURNED FROM THE WIRE OR BAR AND NOT SPUN OR SET UP. ✓

HEAD OF SCREW TO BE POLISHED BEFORE HARDENING OR PHOSPHATING. ✓

(HARDNESS :- 300-400 H.V.) ✓

MATERIAL :- STEEL BS 970 PT.1-1983 070 M-55 (En-9) ✓

PROTECTIVE FINISH :- PHOSPHATE TO SPECN. JSS 0465-01:1988 ✓  
 CLASS 1 OIL FINISH. ✓

PART NO.		DESCRIPTIONS		NO OFF	MATERIAL	TREATMENT	REMARKS
					AS ABOVE		
⊕	⊖	SIGNATURE & DATE.	SUB: SCREW STRIKER ✓		SCALE 2:1 ✓		
TRACED			FOR: 0.315" SPORTING RIFLE ✓		STORE DRG.NO.		
DRAWN	<i>Present</i>		DES. REF. NO. SP-17		OPERATION NO.		
CHECKED	<i>[Signature]</i>		DRG. No.: 29 P 0017		SHEETS: 01		
OIC/D&DO			ORDNANCE FACTORY TIRUCHIRAPPALLI-16.		SHEET No.: 01		
OFFICER/PRODN.							
OFFICER/D&DO							
AMENDMENTS	SIG. & DATE	APPROVED ON.	10/2004				

