




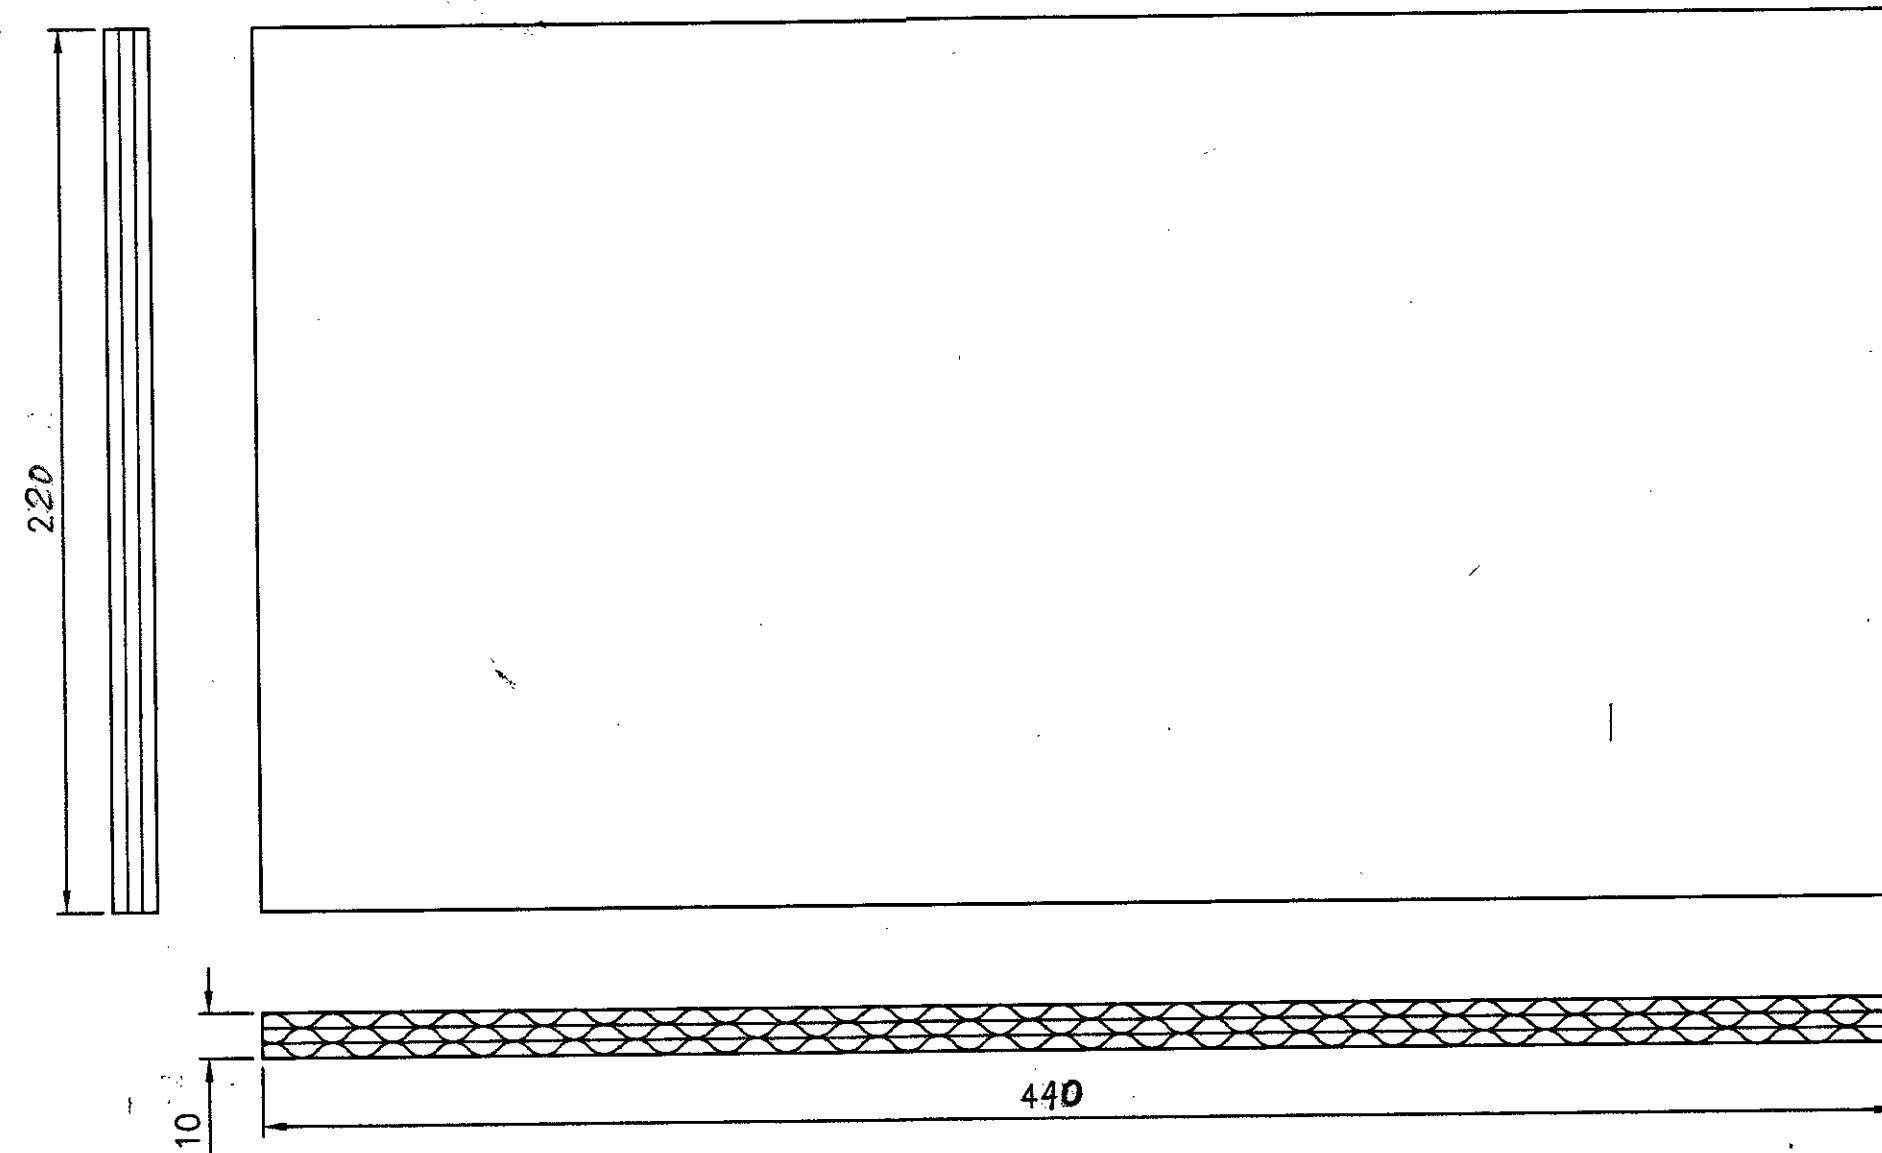



PARTITION

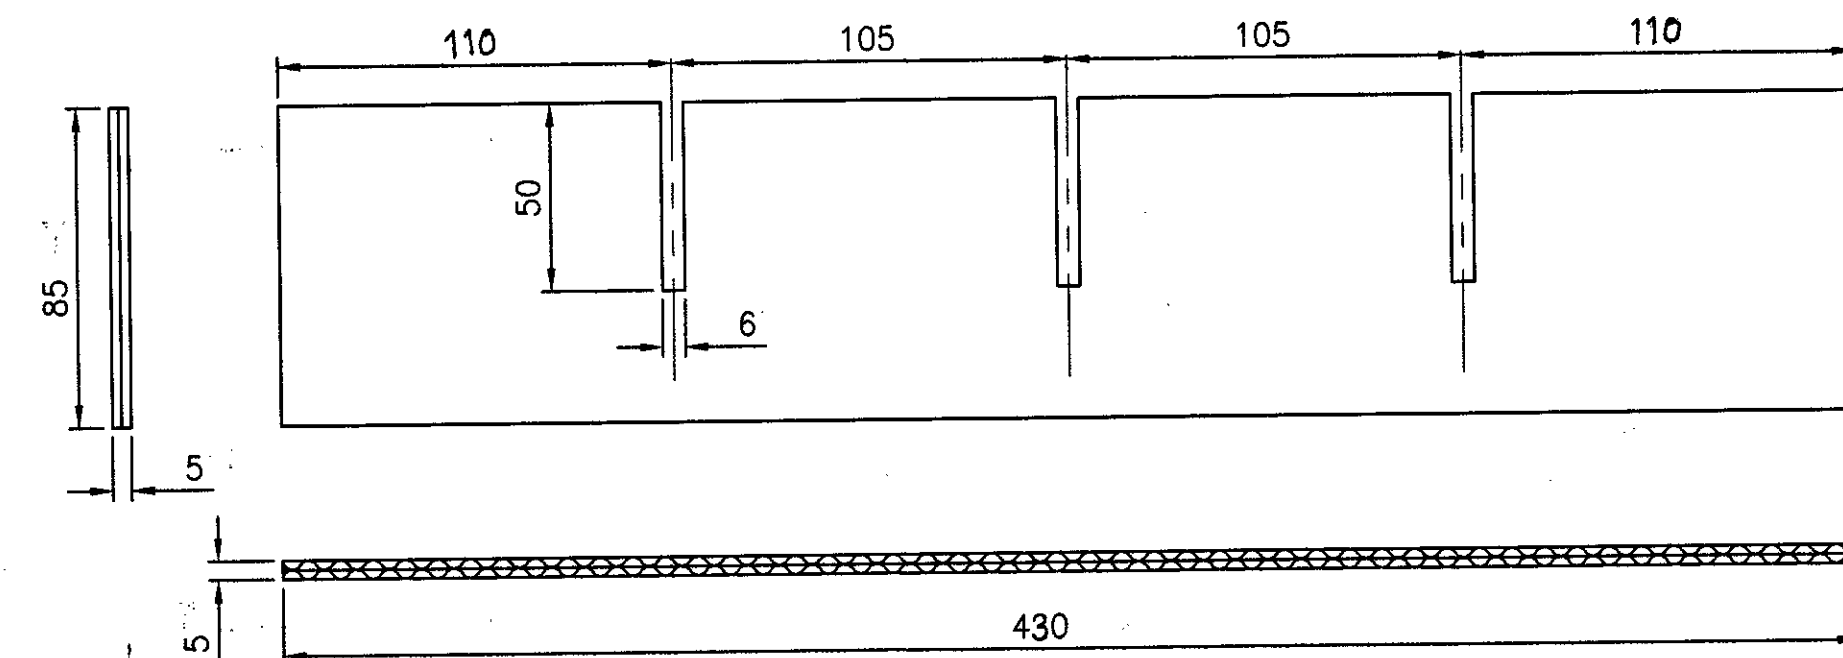

COMPONENT GUIDE

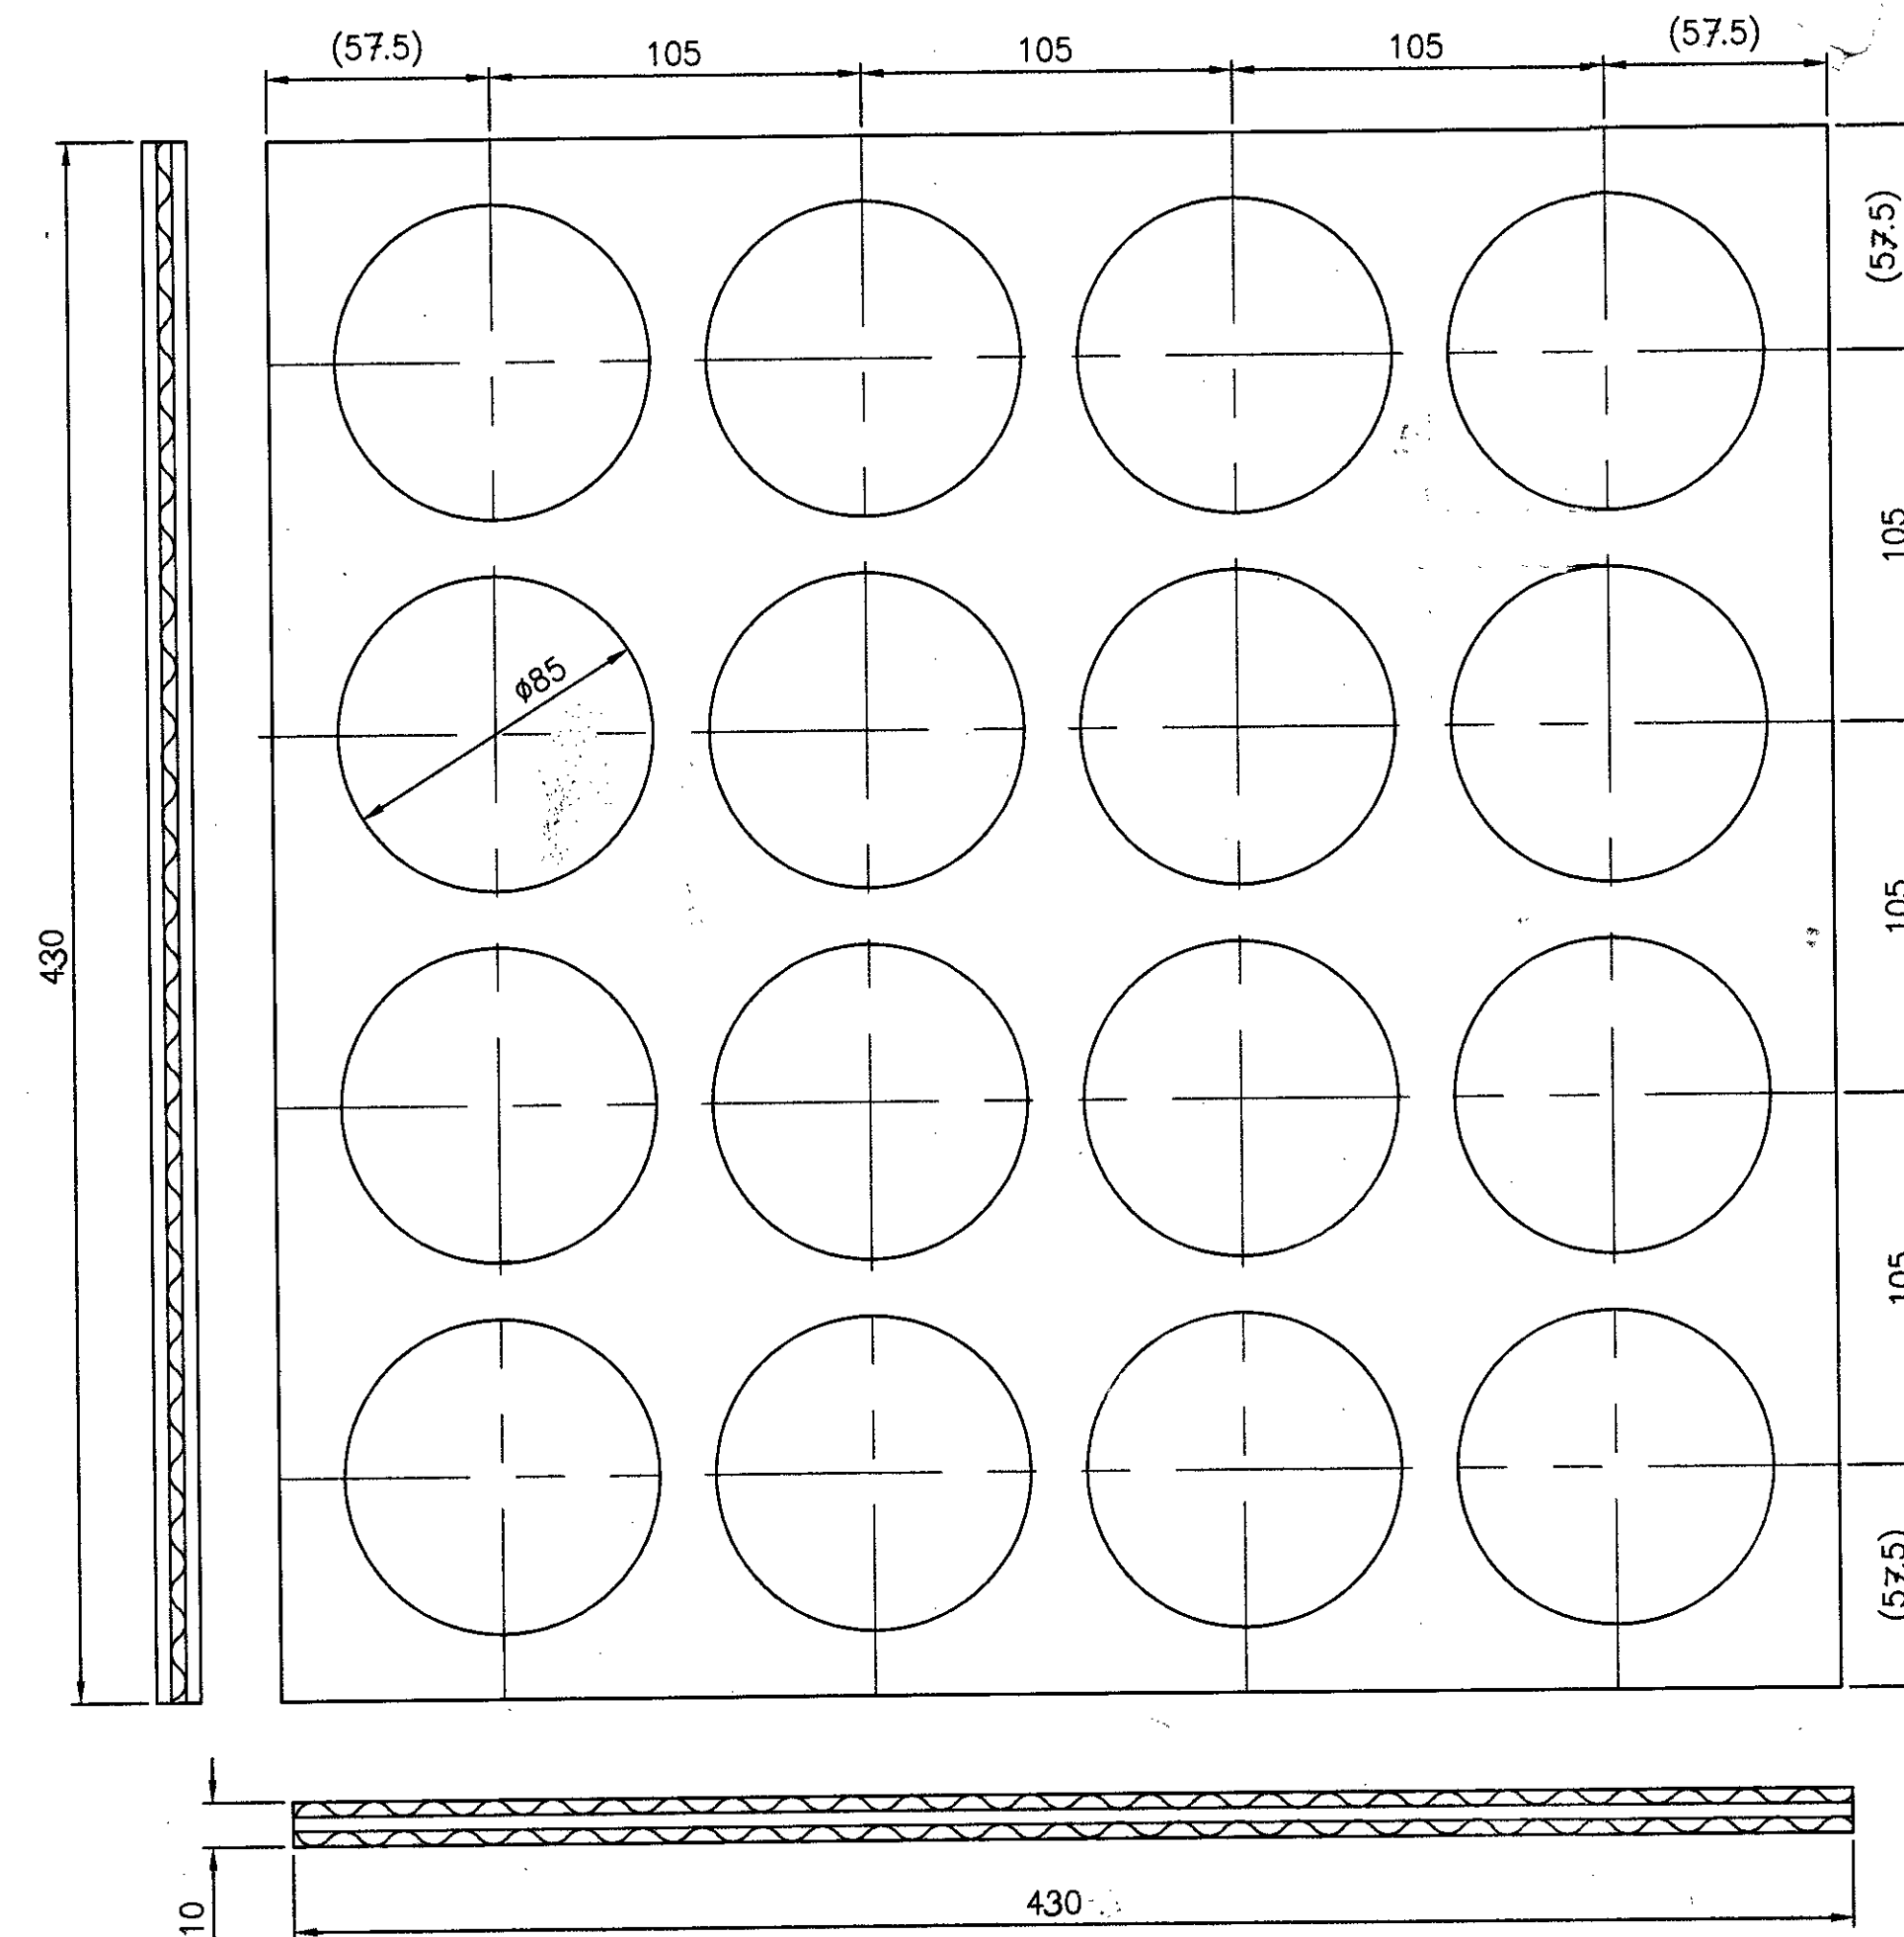

SHOCK ABSORBER (TOP & BOTTOM)

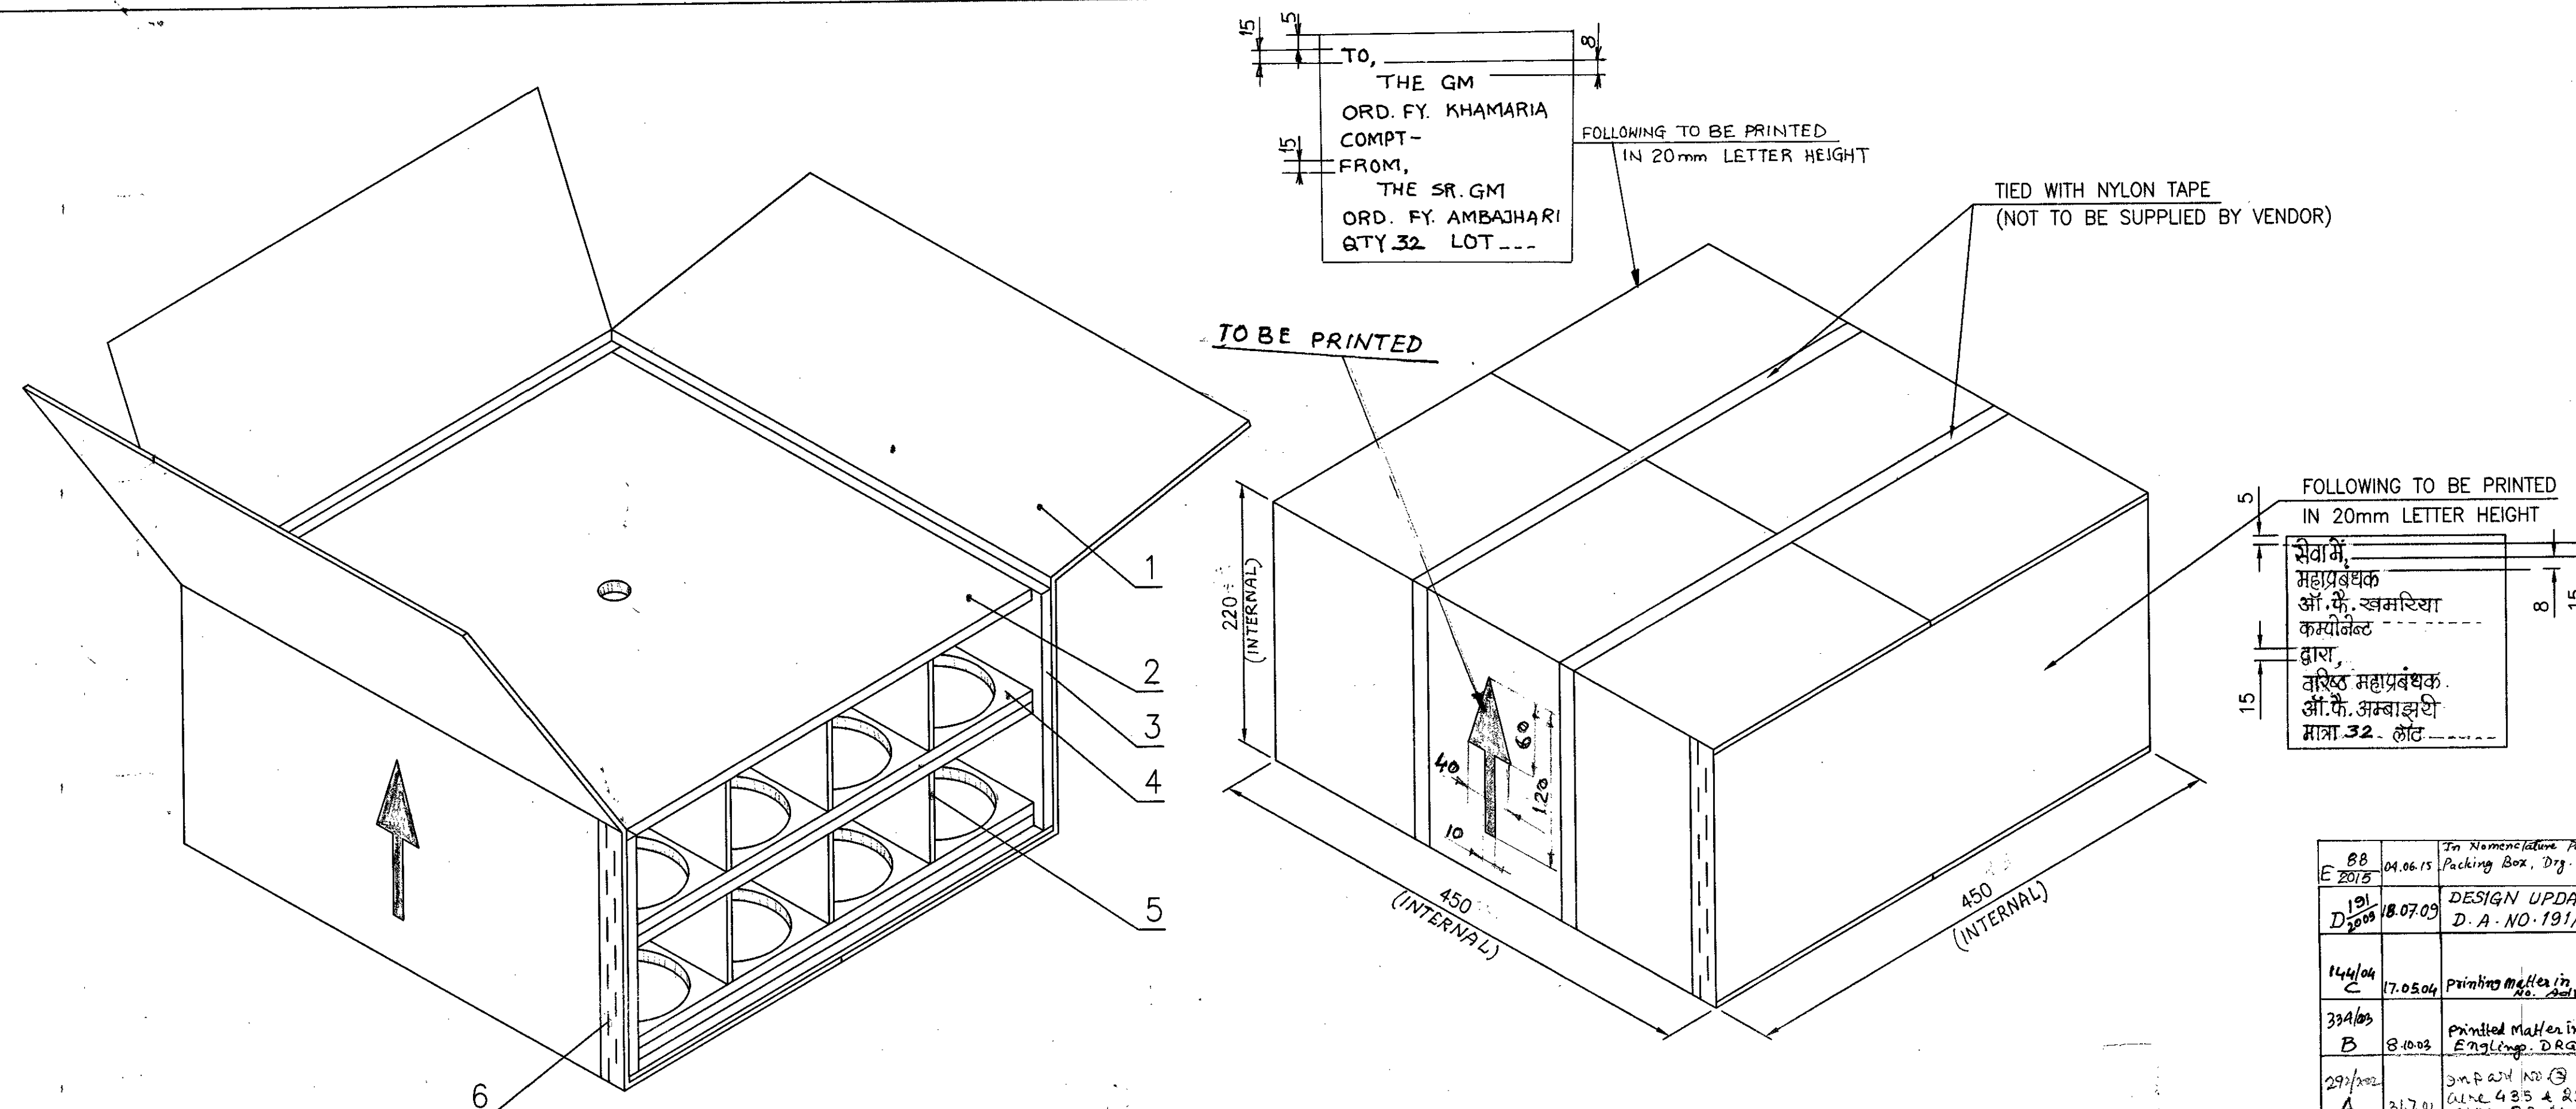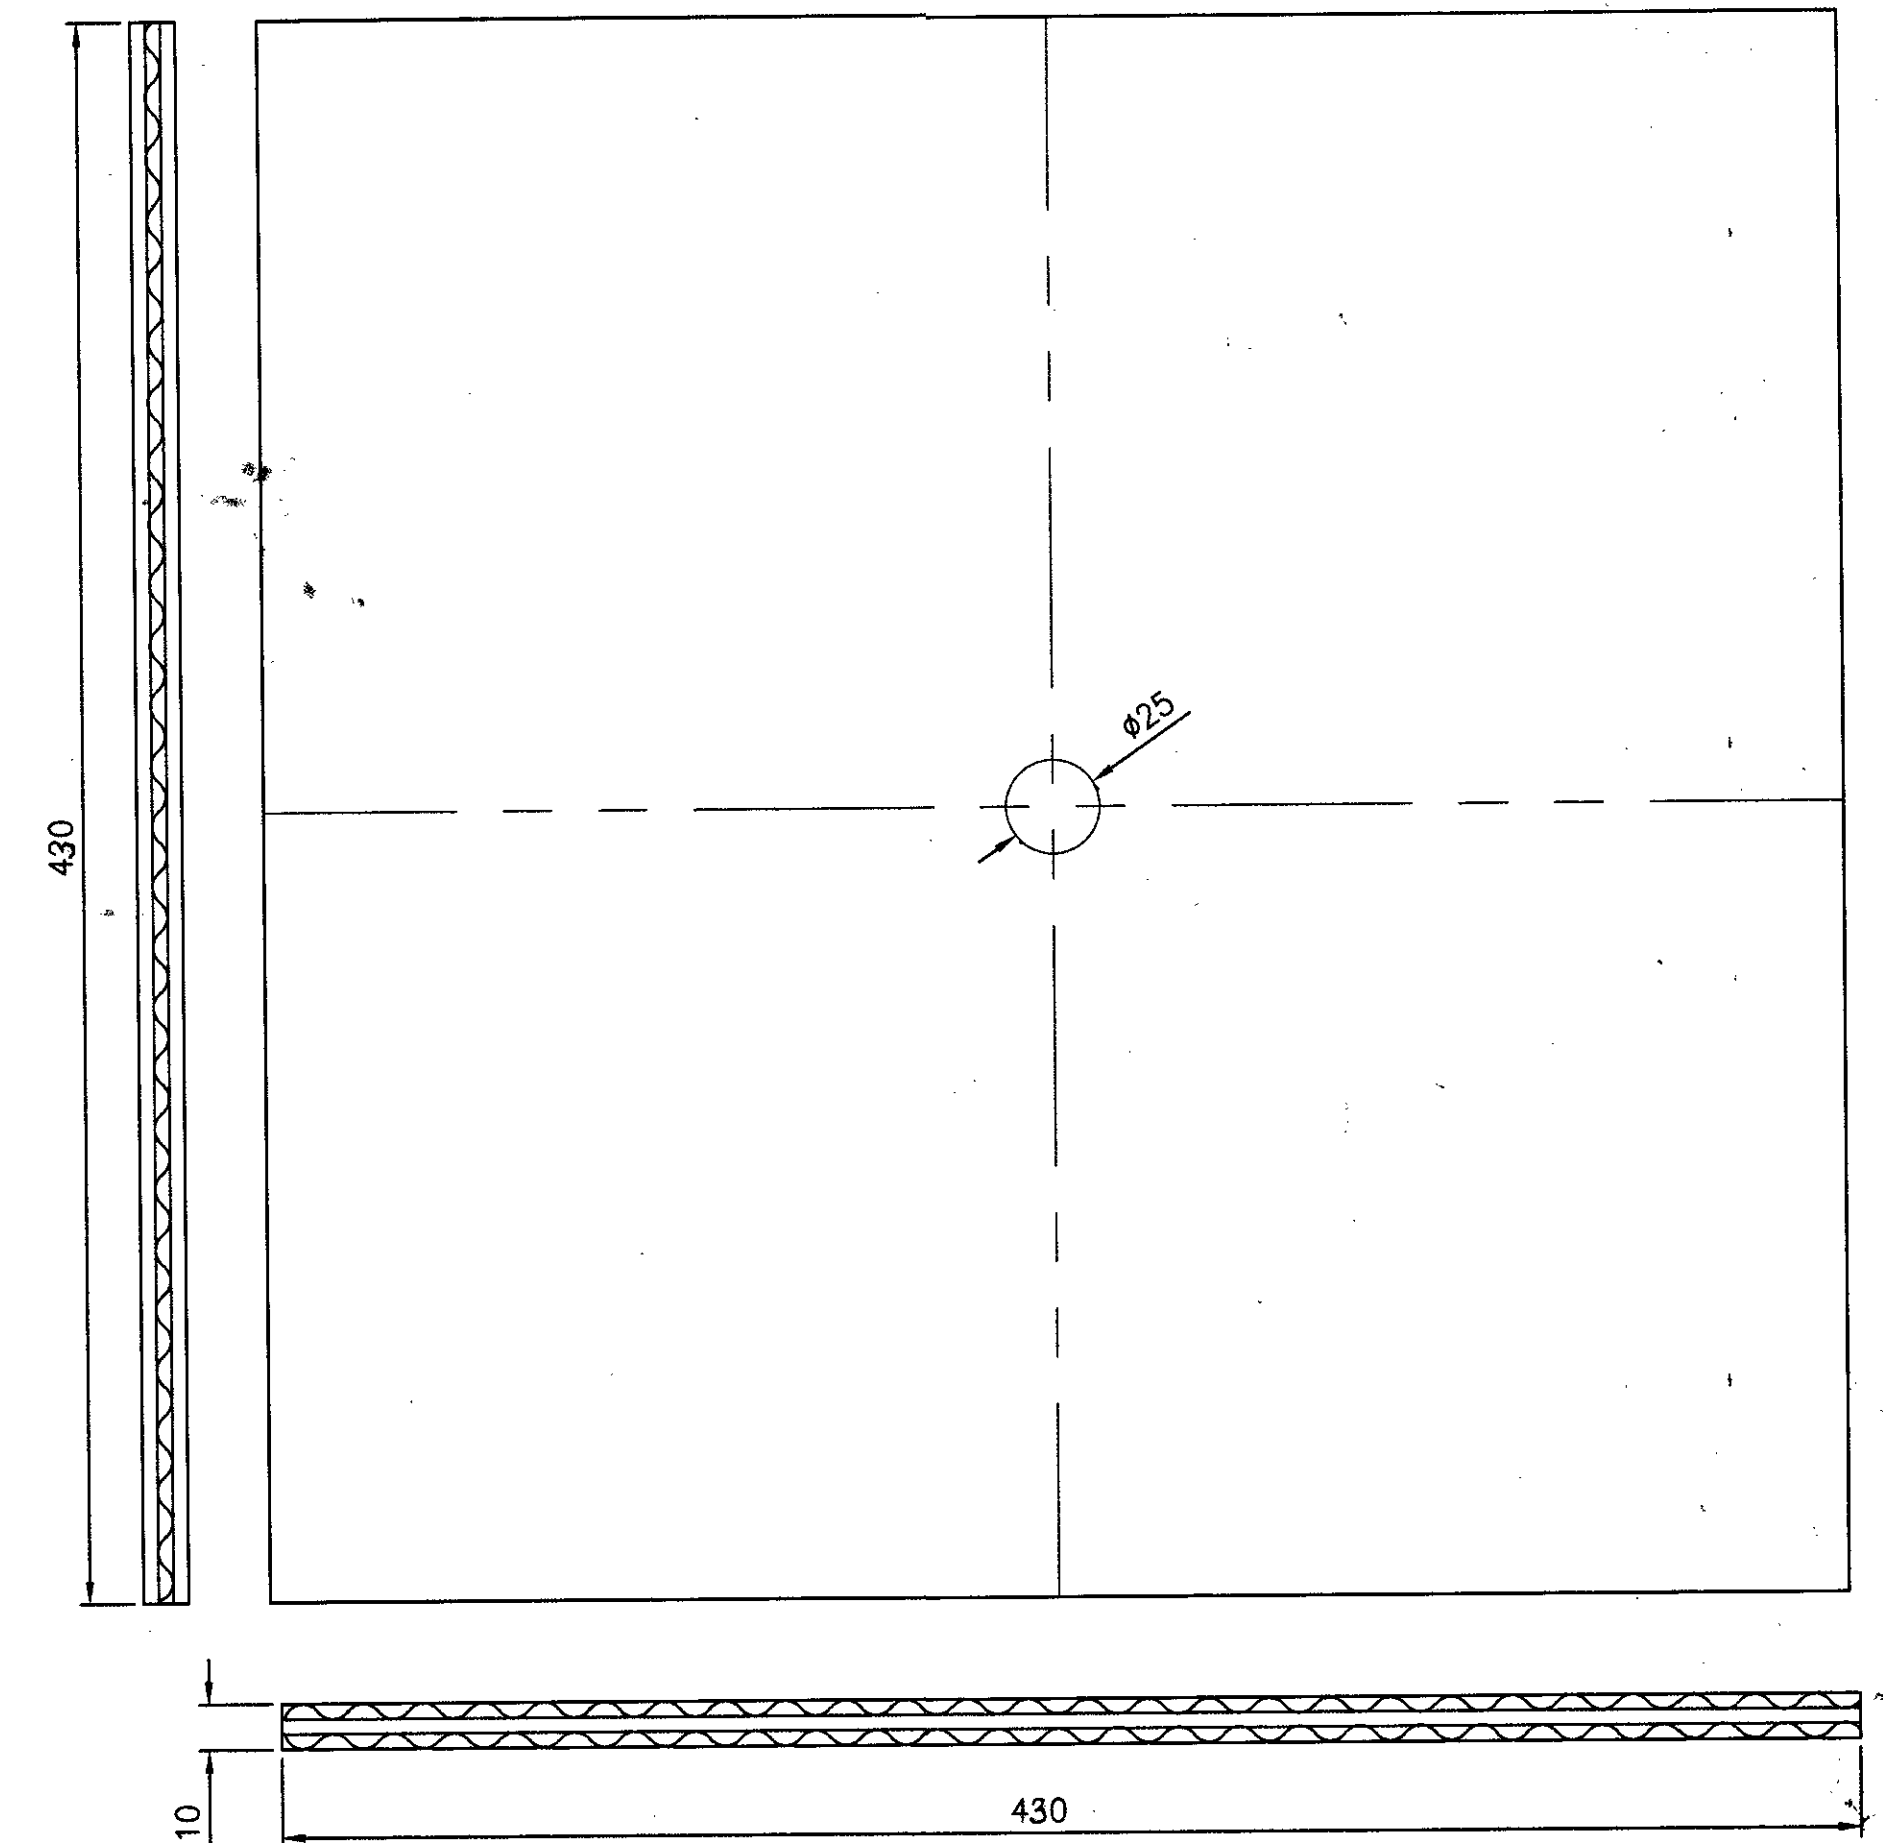

NOTE :

1. PART NO. 1 & 5 : 120 GSM KRAFT PAPER, 5PLY, DOUBLE WALL, VERTICAL NARROW FLUTING, 5mm THICK.
2. PART NO. 2 & 4 : 120 GSM KRAFT PAPER, 9-PLY, FOUR WALL, NARROW FLUTING, 10mm THICK & CROSS FLUTED ie ALTERNATE FLUTES SHOULD RUN ACROSS EACH OTHER
3. PART NO. 3 : 120 GSM KRAFT PAPER, 9-PLY, 4 WALL, VERTICAL NARROW FLUTING, 10mm THICK.
4. PARTS TO BE MARKED WITH THE MANUFACTURER'S NAME/INITIAL OR TRADE MARK.
5. GENERAL WORKMANSHIP AND FINISH SHALL BE GOOD THROUGH OUT.
6. ALL PARAMETERS ARE GOVERNED BY THE SPECN. IS : 2771(PLI) LATEST ISSUE. & SUBJECTED TO PROPER FITMENT OF ALL THE PARTS

6	STAPLES, GALVANISED 12 x 3 x 0.8 THICK	AS REQD.	
5	PARTITION	12	
4	COMPONENT GUIDE	2	
3	SIDE SHOCK ABSORBER	4	
2	SHOCK ABSORBER (TOP & BOTTOM)	3	
1	BOX		MINIMUM 9kg/cm ²
PART	DESCRIPTION	NO. OFF	BURSTING STRENGTH
REMARKS			

PART LIST		
DIMENSIONS ARE IN mm THIRD ANGLE PROJECTION SCALE: 1 : 2 (1 : 4)	MATERIAL: AS ABOVE NOMENCLATURE: CORRUGATED FIBREBOARD PACKING CARTON	ORDNANCE FACTORY AMBAJHARI DRG. NO.: FS-2376E' SHEET NO.: 1 NO. OF SHEETS: 1 OPERATION NO.: COMPT: D SHELL BODY (F1321-30954D) 23 STABILIZING TUBE (F1301-026222)
2002 DRAWN: [Signature] 7/6/92 TRF: [Signature] 8-6-92 C: [Signature] 7/6/92 J: [Signature] 7/6/92	M/C: STORE: 84mm CG	

BOX IN CLOSED CONDITION.