


DIMENSIONS ARE IN MM.

NOTES :-

MATERIAL :-

1. CLOTH CALTICO (BLEACHED) TO SPECN IS 5088-1982 WITH ANENMENT NO. 1 OF MAY 1985 (FIRST REVISION) AND OF VARIETY 3 OF THE SPECIFICACTION.
2. TYPES OF THREADS TO BE USED I N THE FABRICATION OF BAGS ARE THE THREAD CONFORMING TO THREAD COTTON SEWING 16 TEX X 6 (OR 36 S/6) UNPROOFED UNDYED TO SPECN .JSS 8310 - 02 - 1994, RIVISION . NO. 1 AND DC 3277 - ME - 21 - 2 - 95.
3. THE TAPE USED SHOULD BE TAPE COTTON PROOFED 25 - 0 mm WIDE CONFORMING TO SPECN. IS - 6487 - 1983 (FIRST REVISION), TAPE 600 mm LONG SHALL BE STITCHED ON ONE OF THE VERTICAL SEAM AT A DISTACE OF 150 mm FROM THE OPNE END. THE TAPE SHOULD BE STITCHED THRO. THE CENTRE OF THE TAPE LEAVING FREE ENDS.
4. THE BAG SHOULD BE STITCHED FROM INSIDE THERE SHOULD BE 10 STITCHES PER 25.0 mm ON EVERY SINGLE SEAM.
5. STITCHES SHOULD BE MADE WITH DOUBLE SEAMS.

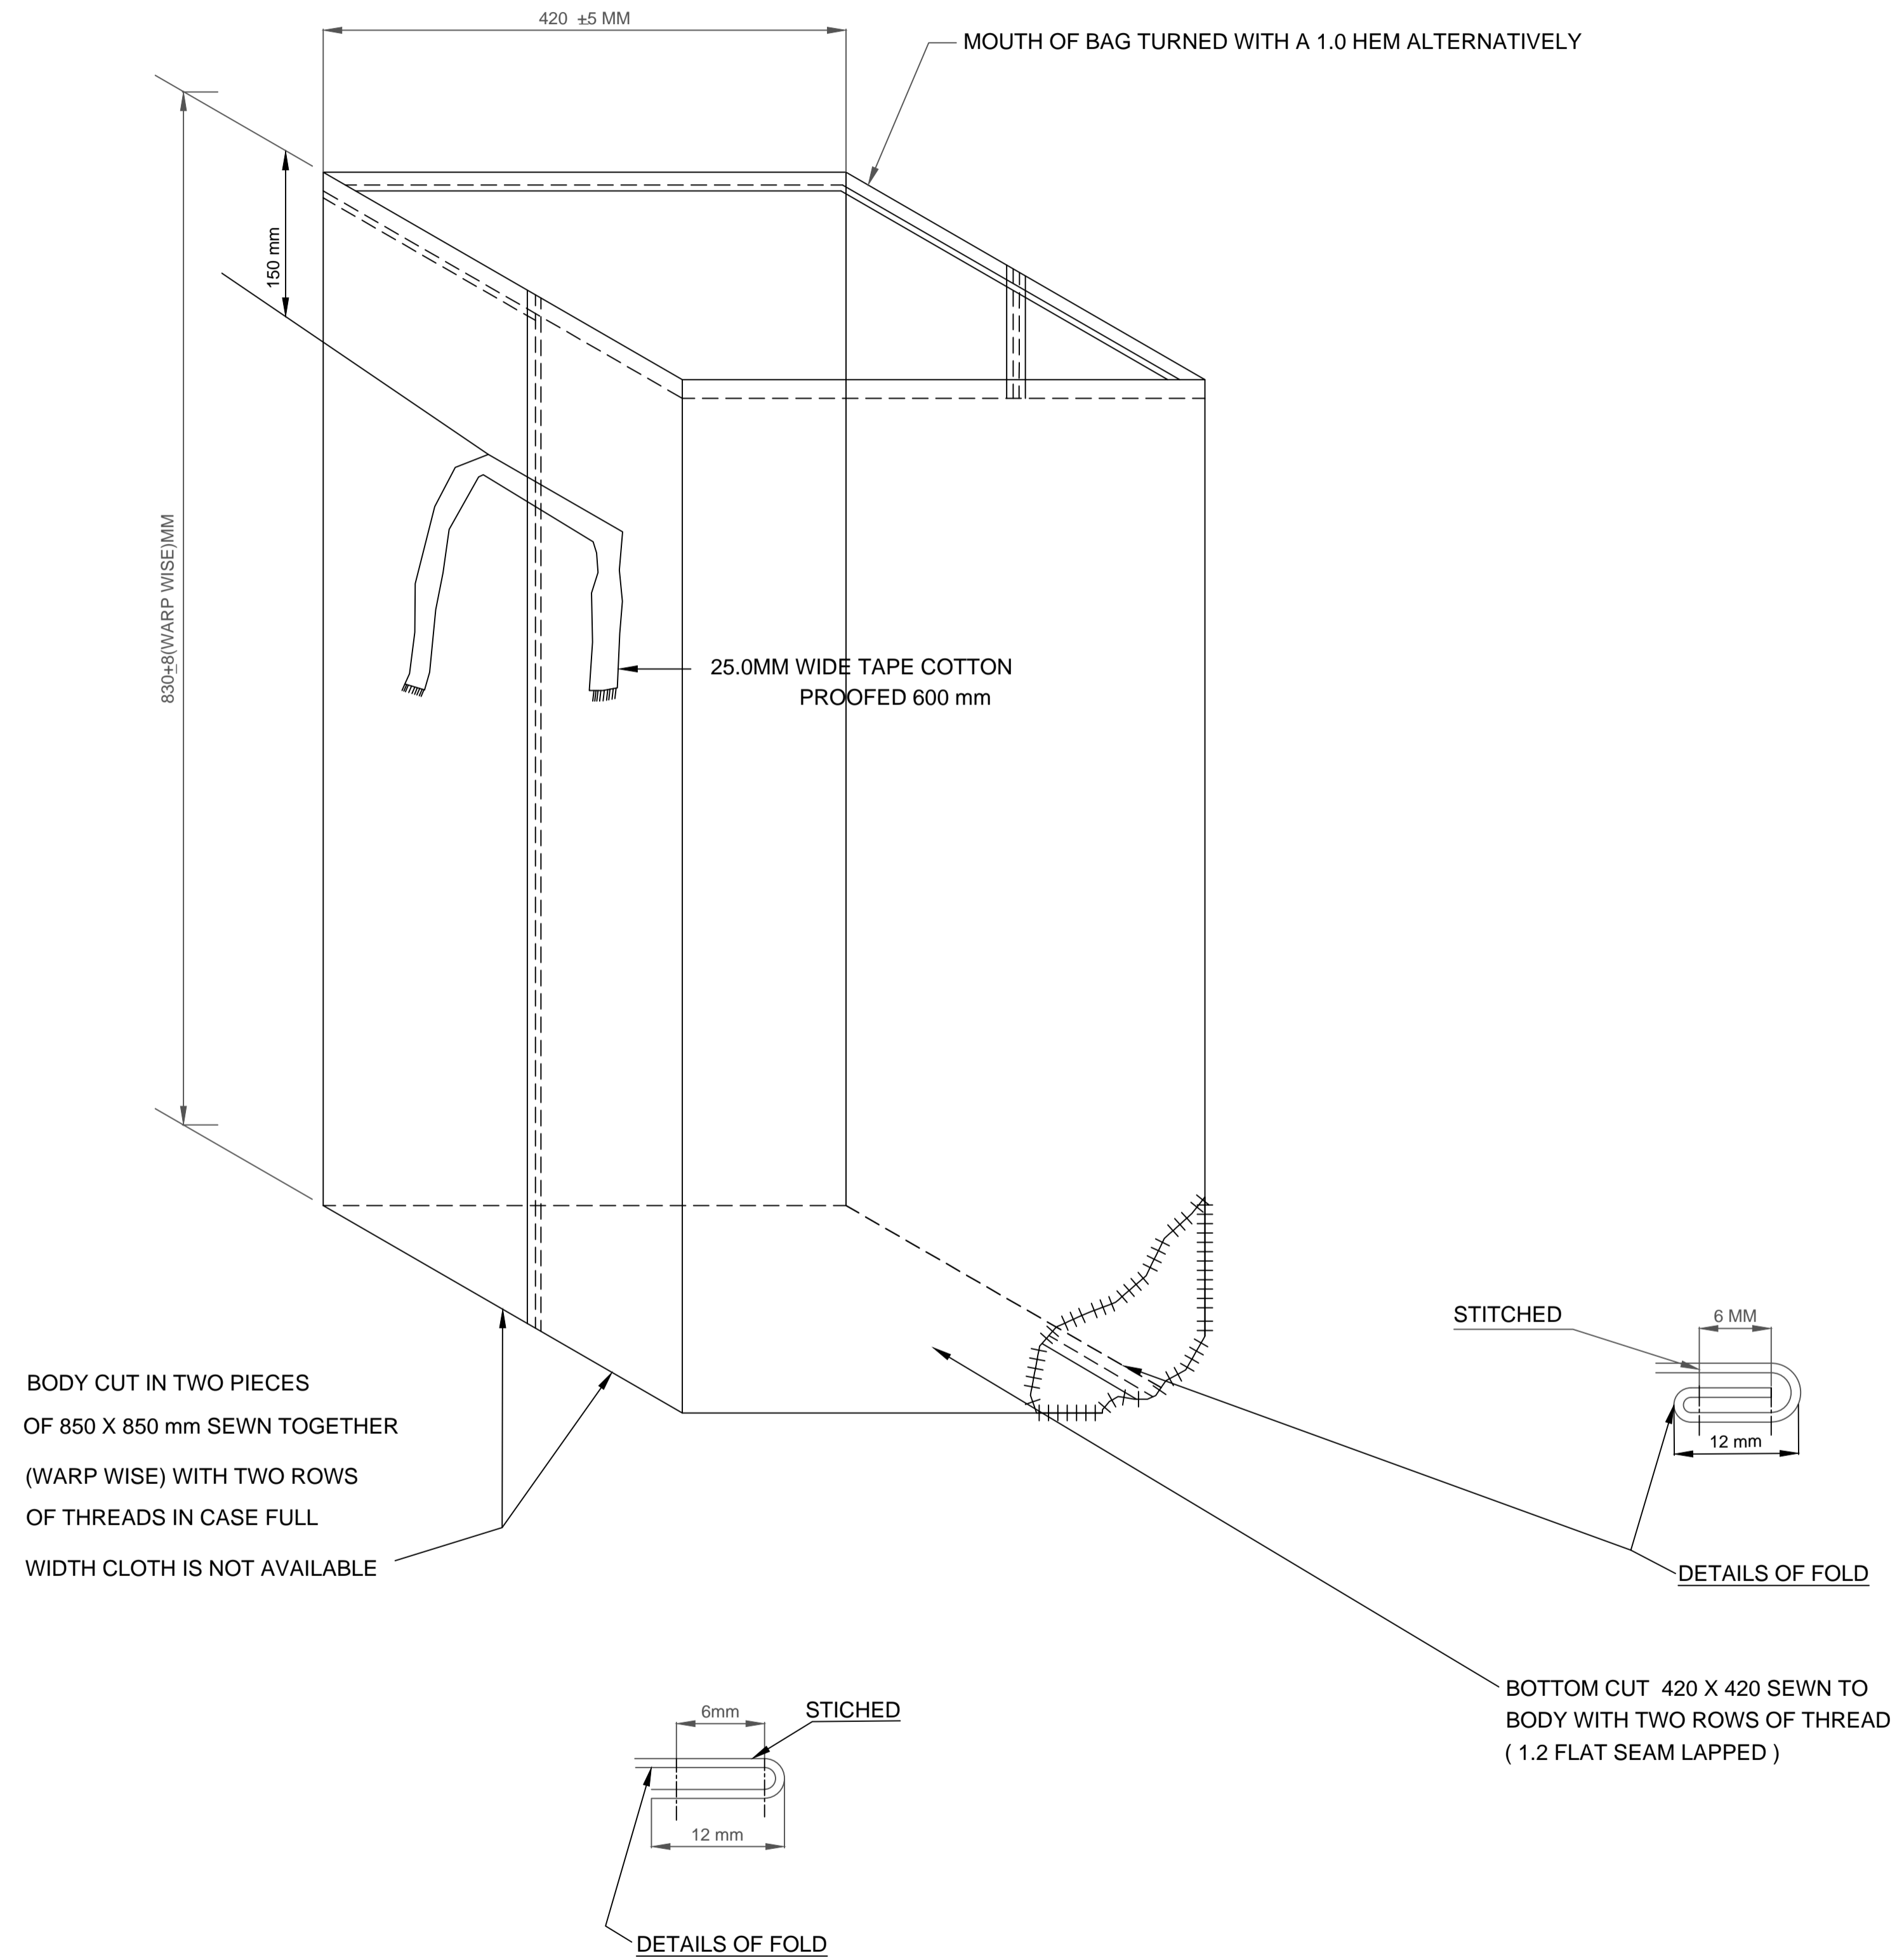

ORDNANCE FACTORY BHANDARA	
BAG CALICO (BLEACHED) NCP - 50 kgs	
DATE :- 29/5/99	SCALE :- 1/5
DRAWN BY :- Sd/-	DRG NO. OFBA/ NR/ 251/2
TRACED BY :-	
CHECKED BY :-	APPROVED BY :-
Sd/- HOS/DVO/NR	FINAL APPROVAL Sd/- DGM/TS FOR GENERAL MANAGER