DRG. NO :

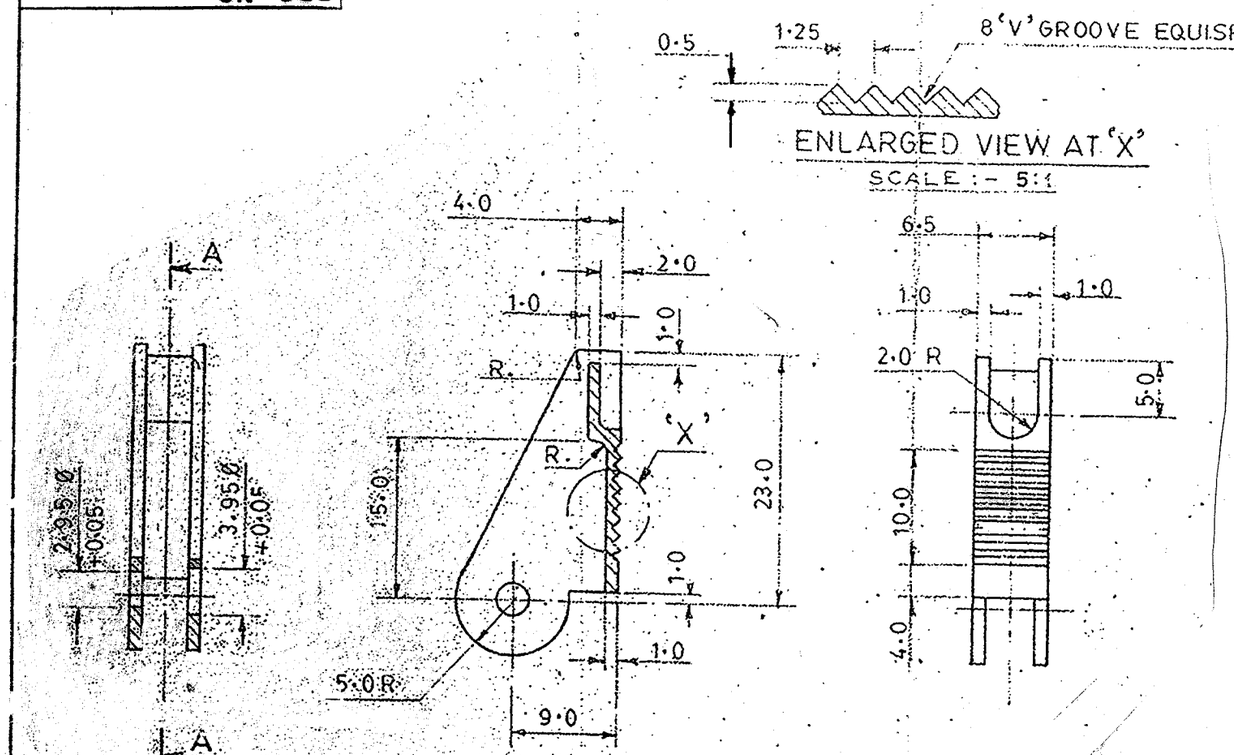

SECTION 'A-A'

LOCK HOOK

DES. REF. NO. D.S. CAT. NO. 1005-008029 (R8323 CES)

MATERIAL: STEEL IS : 7226 C40 ALT. MATL: BS 1449 PT I 1983 GD CS 40

HARDNESS: 250-325 H.V

PROTECTIVE FINISH: PHOSPHATE TO SPECN. JSS. 0465-01-:1988 CLASS-II (ACCELERATED) OIL FINISH.

(2)

(4)

DES. REF. NO. DS CAT. 5215-010102 (R8324 CES)

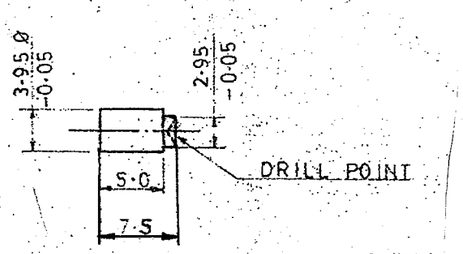

PIN, AXIS LOCK HOOK

MATERIAL: STEEL TO BS: 970 PT I - 1983 GD. 080 M 40 (En 8)

PROTECTIVE FINISH: PHOSPHATE TO SPECN. JSS: 0465-01:1988 CLASS II (ACCELERATED), OIL FINISH.

DIMENSIONS ARE IN M. M.
INFORMATION MARKED THUS 't' TO BE MARKED ON UNTOLERATED DIMENSIONS AS PER IS. 2102 (MEDIUM)

ITEM NO.	DESCRIPTIONS	NO OFF	MATERIAL	TREATMENT	REMARKS

	SIGNATURE & DATE
DRAWN	S. Venkatesh
CHECKED	
TRACED	
TRACING CHECKED	
I/C DESIGN & DRG. OFFICE	

AMENDMENTS | SIGNATURE & DATE

APPROVED ON : 14/8/12

SUB: HOOK ASSY
FOR: SLING
OF: 40mm MGL
DES. REF NO:
DRG. NO : 30T 1700 022 A3

DIVISIONAL OFFICER

ORDNANCE FACTORY, TIRUCHIRAPALLI.

SCALE: NTS
STORE DRG NO
OPERATION NO
SHEETS: 7
SHEET NO: 3