DRG. CONVENTIONS CONFORM TO IS: 696. DIMENSIONS ARE IN MM

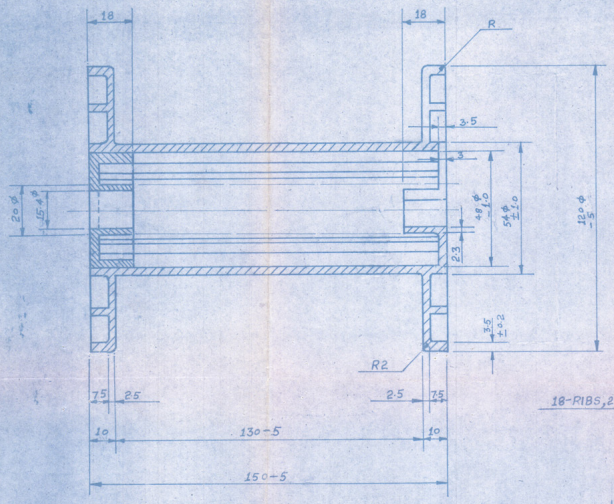

SECTION A-A

4 RIBS, 4 X 2.5 THICK, EQUISPACED

GEN. TOL.:- MED. CLASS TO SPEC. IS: 2102

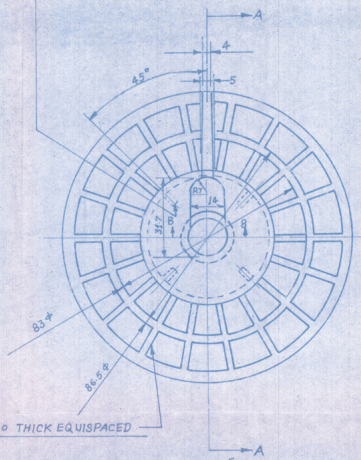



PART SECTION B-B

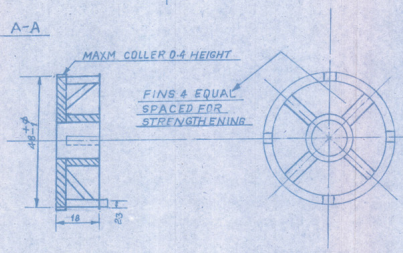

PART-II

MATERIAL:-
POLY STYRENE MOULDING PLASTIC AMMN. (COLOUR DARK GREY) TYPE 'B' TO SPEC. JSS 9330-01

PLEASE NOTE THAT PLASTIC SPOOLS WILL BE SUBJECTED TO DROP-TEST FROM A HIGHT OF 200 CMS AFTER WINDING CABLE ON THE SAME. THE SPOOLS ARE IS REQUIRED TO PASS THIS TEST WITHOUT DAMAGE

NOTE !- SUPPLIES MUST BE FREE FROM FOLLOWING COMMON-DEFECTS AND AS PER SPECIFIED DIMENSIONS

1. FLANGES NOT PERPENDICULAR TO THE AXIS OF SPOOL
2. PART-II (CAP) LOOSE AND/ON DEFORMED AND/OR OF DIFFERENT COLOUR THAN THAT OF SPOOL
3. TAPER SLOT HAVING HARD/SHARP BURRS
4. BLOW-HOLES/PIN DIFECTS/MOLDING DEFECTS
5. SHARIP-EDGE ON 4/5 mm. TAPER SLOT
6. WIDTH 14 IS OVERSIZED/PLEASE NOTE THAT ABOVE ARE COMMON DEFECTS WHICH IF DETECTED IN SUPPLIES WILL RENDER THE SUPPLIES BEING SENTENCED AS REJECT

1. PART-I-MAIN BODY
2. PART-II-CAP

S NO	AMENDMENTS	DT.	SIG.
1	NOTE INSERTED	12-2-2000	

REF:- TRACED FROM ASSY. DRG. 1QX83A AND DESIGNER'S REF. CIA/AMN/2399 PART NO 1QX843 OF AHSP/-C1(A KIREE

AMENDMENT IN DRAWING OF C.I.A

1. THE SLOT AT FLANGE WAS 4 mm. WIDE RIGHT THROUGH
2. THE PART SECTIONAL VIEW IN THE DRAWING QUOTED AGAINST REFERENCE IS CORRECTED

ITEM	DESCRIPTION	NO OFF	MATERIAL

LIST OF PARTS

S.P. AGRAWAL AGM/P
FOR GENERAL MANAGER
ORD. CABLE FACTORY CHANDIGARH

DRN	TCD	SKD	AMP

MTL. —
SCALE — 1:1
DATE 31-1-2000
DRG. NO O.C.F. SK. 1087-B
SHEET NO. 1

SPOOL PLASTIC TO HOLD 55 METRES OF CABLE